
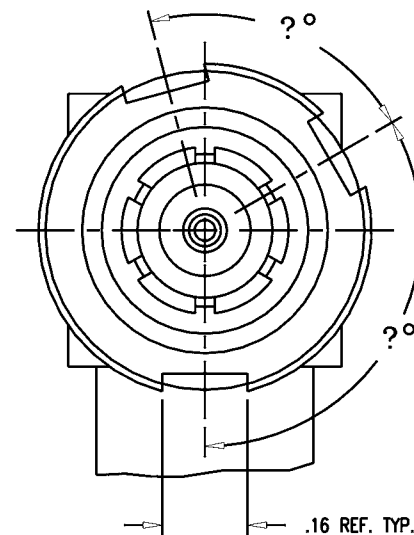


DASH NO.	M CODE	MADE FROM
----------	--------	-----------

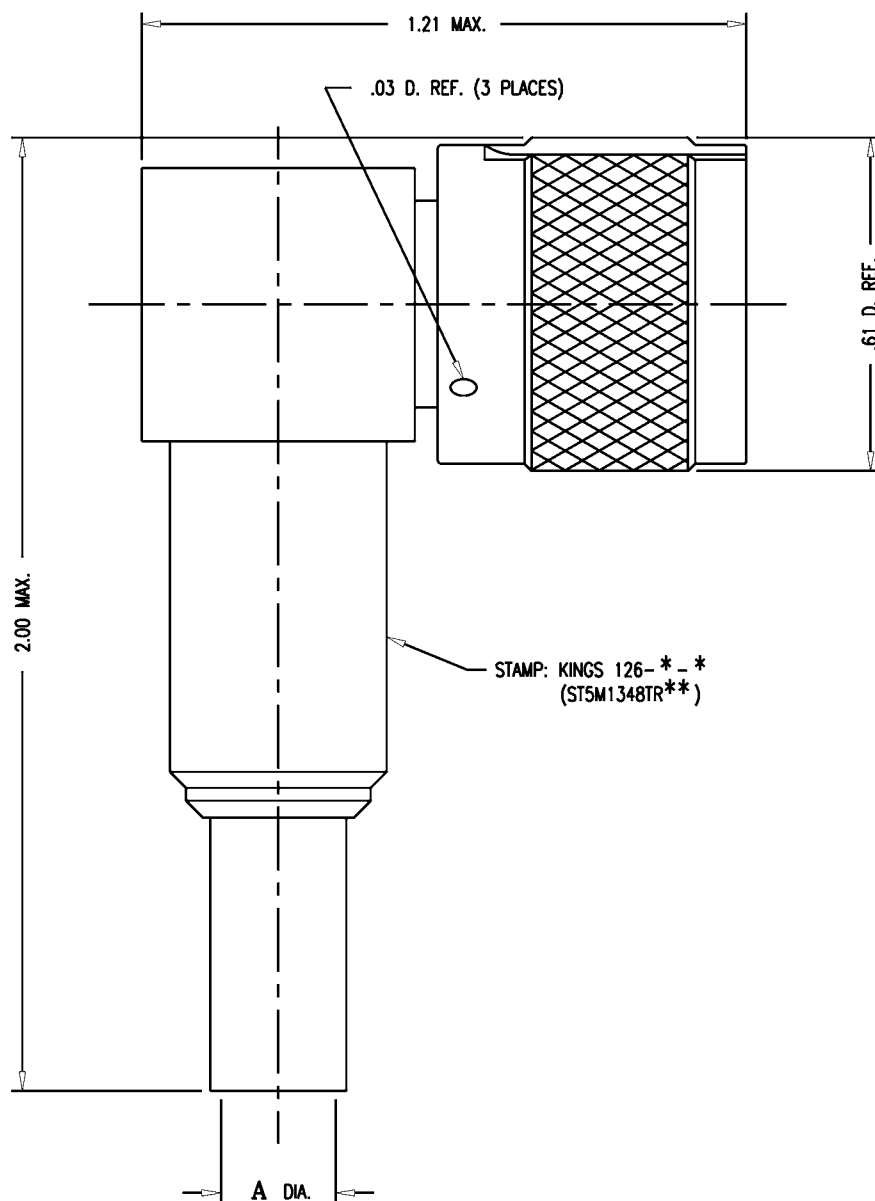

NOTES:

1. MATERIALS:

INSULATOR: TEFLON, ASTM-D-1457
 GASKET: SIL. RUB., ZZ-R-765
 CONTACTS } BER. COP., ASTM-B-196
 C-RING }
 K-GRIP SLEEVE: COM. BRONZE TUBE, ALLOY 220
 ALL OTHER PARTS: BRASS, QQ-B-626

2. FINISHES:

CENTER CONTACT: HARD GOLD PLT. PER MIL-G-45204
 ALL OTHER METAL PARTS: SILVER PLT. PER QQ-S-365

3. ELECTRICAL CHARACTERISTICS:

NOMINAL IMPEDANCE: 50 OHMS
 VOLTAGE RATING: 500 VRMS
 FREQUENCY RANGE: DC TO 11 GHz

GSD

GSD

126-*-* (SHEET 1 OF 2)

REVISIONS

ISSUE	CHANGES
1	CN 32553 E REDRAWN JCA 10/04/90

SCALE 4:1

APPROX SURFACE AREA

USED ON

REF: MC AIR ST5M1348TR**

TNC ANGLE PLUG

DRAWN	JCA	DATE	10/04/90
DESIGN	MJB	DATE	10/04/90
APPR.		DATE	

KINGS
 ELECTRONICS CO., INC.
 TUCKAHOE, NEW YORK 10707

126-*-*
 (SHEET 1 OF 2)

KINGS NO.	MCDONNELL DOUGLAS NO.	A DIA.	°	°	CABLE GROUPS	JACKET TRIM JIG	DIELECTRIC TRIM JIG	CRIMP DIE	126-*-* (SHEET 2 OF 2)	REVISIONS		
										ISSUE	CHANGES	
126-1-1	ST5M1348TR1B	.22 D.	72	120	FOR USE WITH RG-142, 223 & 400/U CABLE GROUPS.		KTD-166			1	CN 32553 E REDRAWN JCA 10/04/90	
126-1-2	ST5M1348TR2B		96	96								
126-1-3	ST5M1348TR3B		120	144								
126-1-4	ST5M1348TR4B		72	144								
126-1-5	ST5M1348TR5B		120	120								
126-1-6	ST5M1348TR6B		120	72								
126-1-7	ST5M1348TR7B		120	96								
126-1-8	ST5M1348TR8B		110	72								
126-2-1	ST5M1348TR1C	.21 D.	72	120	FOR USE WITH G.D. 5M1010-1 CABLE.	KTJ-113	KTD-24	KTH-2001				
126-2-2	ST5M1348TR2C		96	96								
126-2-3	ST5M1348TR3C		120	144								
126-2-4	ST5M1348TR4C		72	144								
126-2-5	ST5M1348TR5C		120	120								
126-2-6	ST5M1348TR6C		120	72								
126-2-7	ST5M1348TR7C		120	96								
126-2-8	ST5M1348TR8C		110	72								
126-3-1	ST5M1348TR1D		72	120	FOR USE WITH G.D. ST5M1347 CABLE.		KTD-244					
126-3-2	ST5M1348TR2D		96	96								
126-3-3	ST5M1348TR3D		120	144								
126-3-4	ST5M1348TR4D		72	144								
126-3-5	ST5M1348TR5D		120	120								
126-3-6	ST5M1348TR6D		120	72								
126-3-7	ST5M1348TR7D		120	96								
126-3-8	ST5M1348TR8D		110	72								
126-4-1	ST5M1348TR1E	.18 D.	72	120	FOR USE WITH G.D. ST5M1351 & RG-180 CABLE.	KTJ-116	KTD-161	KTH-2007				
126-4-2	ST5M1348TR2E		96	96								
126-4-3	ST5M1348TR3E		120	144								
126-4-4	ST5M1348TR4E		72	144								
126-4-5	ST5M1348TR5E		120	120								
126-4-6	ST5M1348TR6E		120	72								
126-4-7	ST5M1348TR7E		120	96								
126-4-8	ST5M1348TR8E		110	72								
GSD											GSD	
											SCALE 1:1	
											APPROX SURFACE AREA	
											USED ON	
											REF: MC AIR ST5M1348TR**	
											TNC ANGLE PLUG	
											DRAWN JCA DATE 10/04/90	
											DESIGN MJB DATE 10/04/90	
											APPR. DATE	
											KINGS ELECTRONICS CO., INC. TUCKAHOE, NEW YORK 10707	
											126-*-* (SHEET 2 OF 2)	