




Extract from the online
catalog

PC 4/11-G-7,62

Order No.: 1804881

The figure shows a 5-pos. version of the product

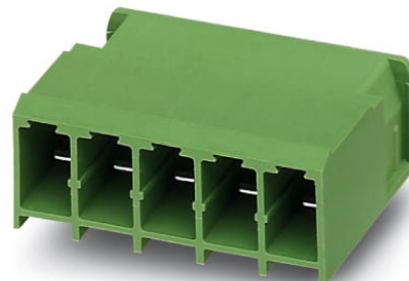

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1804881>

Header, Nominal current: 20 A, Nom. voltage: 400 V, Pitch: 7.62 mm,
Number of positions: 11, Color: green, Assembly: Soldering

Commercial data

EAN	4017918046323
Pack	50 pcs.
Customs tariff	85366990
Weight/Piece	0.019611 KG
Catalog page information	Page 370 (CC-2009)

Product notes

WEEE/RoHS-compliant since:
01/01/2003



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Dimensions / positions

Pitch	7.62 mm
Dimension a	76.2 mm
Number of positions	11
Pin dimensions	1 x 0,8 mm
Hole diameter	1.3 mm

PC 4/11-G-7,62 Order No.: 1804881
http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1804881

Technical data

Insulating material group	I
Rated surge voltage (III/3)	6 kV
Rated surge voltage (III/2)	6 kV
Rated surge voltage (II/2)	6 kV
Rated voltage (III/2)	630 V
Rated voltage (II/2)	630 V
Connection in acc. with standard	EN-VDE
Nominal current I_N	20 A
Nominal voltage U_N	400 V
Maximum load current	20 A
Insulating material	PA
Inflammability class acc. to UL 94	V0

Certificates / Approvals



Certification

BV, CSA, CUL, DNV, GL, GOST, LR, RS, UL

CSA

Nominal voltage U_N	300 V
Nominal current I_N	20 A

CUL


Nominal voltage U_N	300 V
Nominal current I_N	35 A

UL


Nominal voltage U_N	300 V
Nominal current I_N	35 A

Diagrams/Drawings

Drilling plan/solder pad geometry

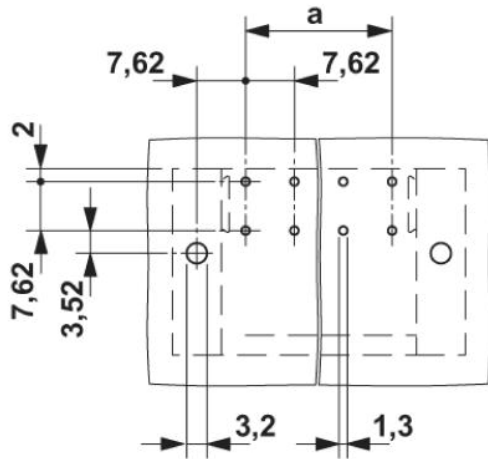


Diagram

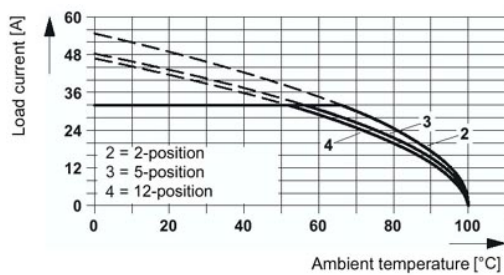

The illustration shows the derating curve for plugs PC 5/...-ST-7,62 in combination with header PC 4/...-G-7,62.

Dimensioned drawing

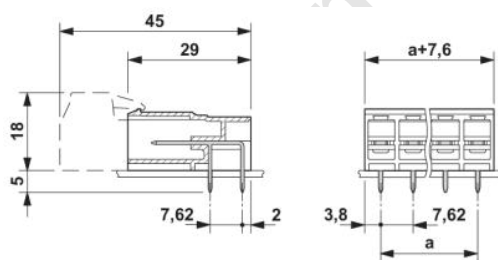

PC 4/11-G-7,62 Order No.: 1804881
<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1804881>

Address

PHOENIX CONTACT Deutschland GmbH
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact
Technical modifications reserved;

onlinecomponents.com