

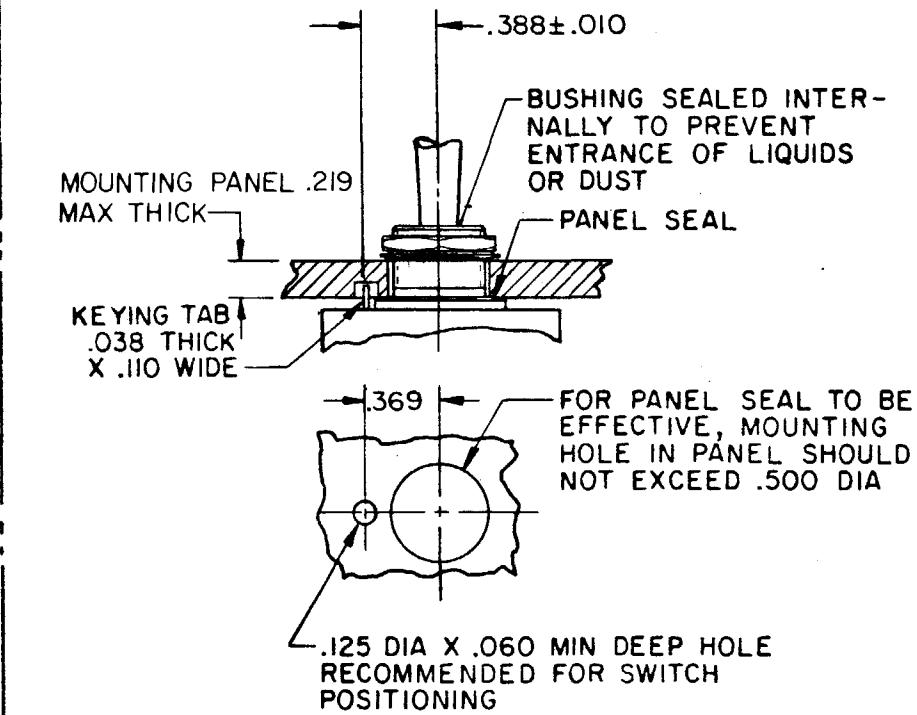
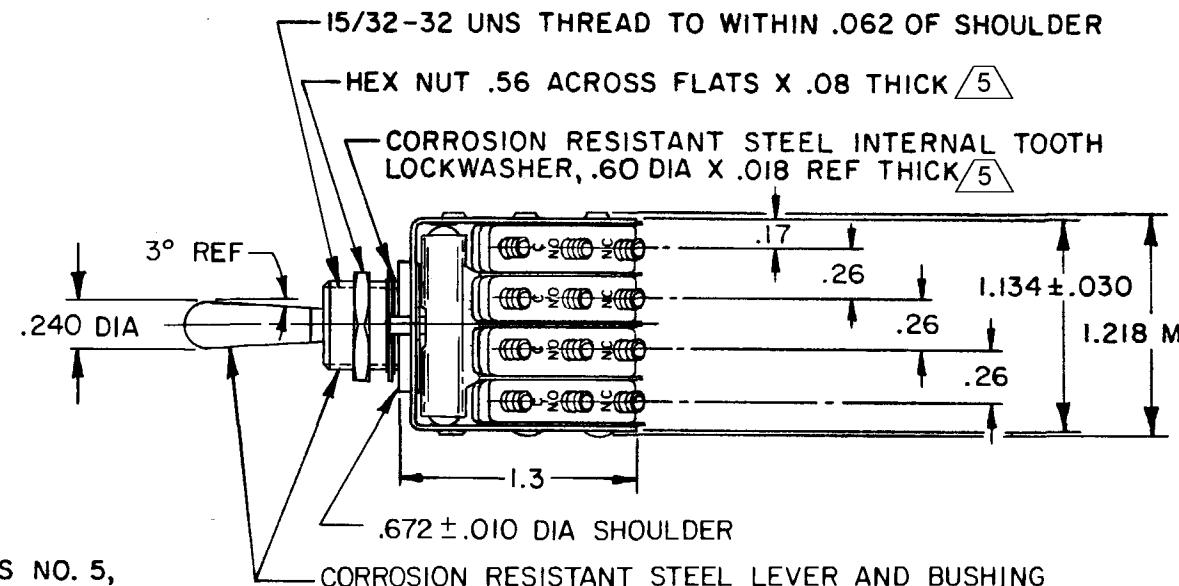


22AT31-T2
PAGE 1 OF 1
RELEASE NO. PR-9524
REPLACES
DRAWING NUMBER
5
ISSUE
CHECK
REVISIONS

NO TO C CIRCUITS MADE (SWITCHES NO. 5,
6, 7, AND 8) NC TO C CIRCUITS MADE
(SWITCHES NO. 1, 2, 3, AND 4)
(MOMENTARY POSITION)

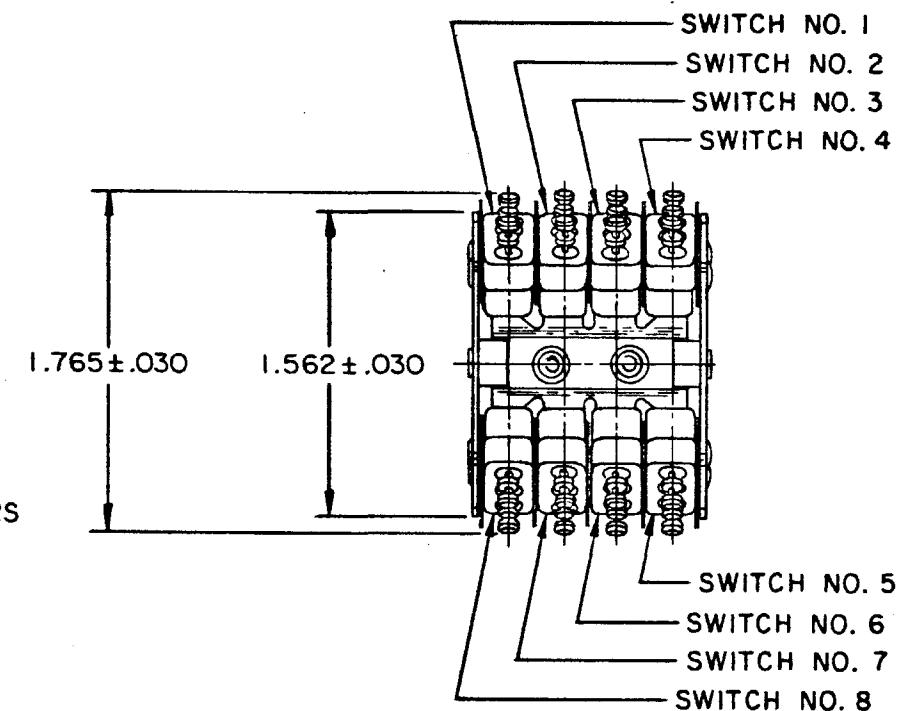

MOUNTING PANEL DETAIL

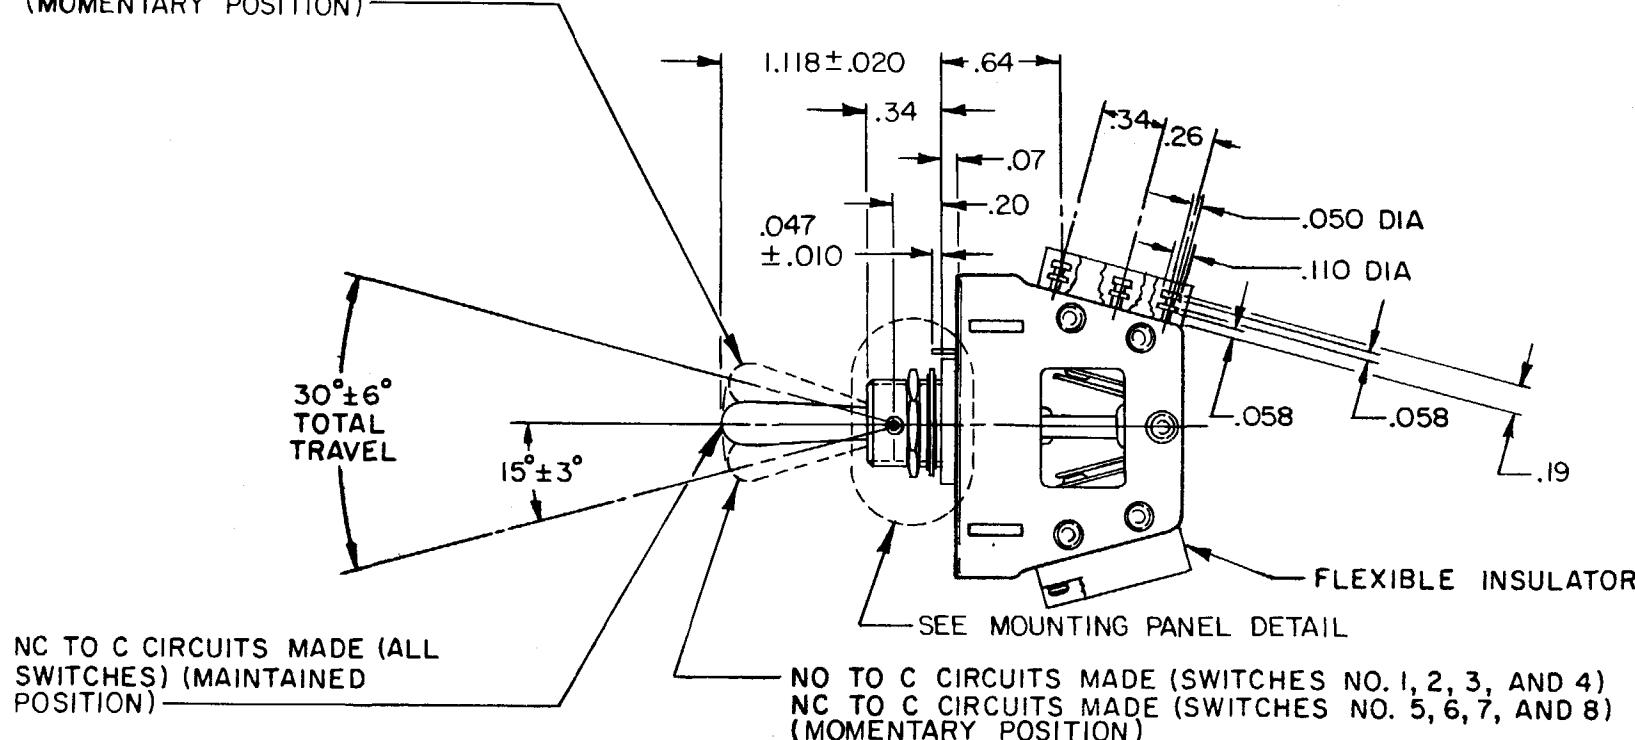

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY
OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT
TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.



SCALE FULL

DO NOT SCALE PRINT

TOLERANCES
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR
REFERENCE. UNLESS NOTED TOLERANCES ARE ±2%

NO PLACES

ONE PLACE

TWO PLACES

THREE PLACES

ANGLES

SIMETRIC

US CUSTOMARY

DESIGN UNITS

RAW MATERIAL-COMMERCIAL STANDARD

MICRO SWITCH STANDARDS APPLY

DIMENSIONS ARE TO BE NET BEFORE
PROTECTIVE COATINGS ARE APPLIED

WEIGHT 2.5 OZ MAX

NOTES

- 1 - UNIT INCLUDES (8) CAT. LIST. 11SM23-T2 BASIC SWITCHES
- 2 - SWITCHES DO NOT NECESSARILY OPERATE SIMULTANEOUSLY
- 3 - TERMINALS ARE PLATED FOR SOLDERING
- 4 - BASIC SWITCHES HAVE 24K SOLID GOLD CONTACTS
- 5 - HARDWARE FURNISHED ASSEMBLED WITH SWITCH OR IN
PACKET PER MIL-PRF-8805