

General Information These versatile miniature switches have 25.4 mm diameter moulded wafers and are available in 2 versions, 36° indexing - having 18 clip positions and 30° indexing - having 22 such positions. 15°, 45° and 60° indexing are variations of the latter. Optional features include concentric shafts, panel and spindle seals, printed circuit termination's and momentary contact models.

Characteristics.

Electrical, Maximum working voltage,	300Vdc/ac (rms).
Contact rating, Current carrying	2amp continuous.
Current breaking with a resistive/non-reactive load.	150mA at 250Vac (rms)..
Proof Voltage.	1000Vrms at sea level.
Insulation resistance.	Not less than 500 megohms at 500Vdc. (between any 2 parts requiring electrical insulation)
Contact resistance (initial).	10 milliohms maximum at 100mV (rms). 100mA.max.
Mechanical.	
End stop strength.	0,8 ± 0,1 Nm (114oz.in.)

Temperature range.

-40°C. to +100°C.

Maximum Switching Per Wafer

No. of Poles.	36° MU-MA (b)	30° MU-MA (a)	45° MU-MA (c)	60° MU-MA (d)	15° MU-MG
	10 Positions.	12 Positions.			2 wafers
1 Pole.	2 to 10 ways	2 to 12 ways	2 to 8 ways	2 to 6 ways	providing 1 pole
2 Pole.	2 to 5 ways	2 to 7 ways	(fixed stop at	2 to 6 ways	24 way
3 Pole.	2 to 4 ways	2 to 5 ways	positions 3, 5,	2 or 3 ways	switching.
4 Pole.	2 or 3 ways	2 to 4 ways	and 7 ways)	2 or 3 ways	
5 Pole.	-	2 to 3 ways		2 ways only	
6 Pole.	-	2 ways only		on-off	
7 Pole.	-	2 ways only		-	

Index Mechanism.

The Type MU mechanism provides indexing angles of 30°, 36°, 45° and 60°.

(see Bulletin RW36 for full technical details).

The low friction moulded cam followers in the assembly ensures a smooth indexing action.

Balance pressure springs provide consistent and readily reproducible total switch torque values within the following ranges.

Light 7 to 18 x 10⁻² Nm (10 to 26 oz, ins.)

Medium 14 to 32 x 10⁻² Nm (20 to 46 oz, ins.)

High 28 to 56 x 10⁻² Nm (40 to 80 oz, ins.)

Type A indexing mechanism may also be used as an alternative where a simpler, space saving mechanism is required. The switch then becomes model A-MA. 30° indexing only.

Contacts & Termination's.

Standard. Silver plated brass.

Alternatives. - Hard gold plated or silver contacts are available at extra cost as are contacts with gold flash.

Termination's. - Forward, standard: Straight, alternative.

Rotor Blades.

Standard. - Shorting. (make before break. MBB.)

Alternative. - Non-shorting. (break before make. BBM.)

Insulation.

Stator. - Moulded glass fibre loaded diallylphthalate (DAP)

Rotor. - Polycarbonate.

Finish.

Index Springs, Stainless steel: other metal parts, passivated zinc plated. Finishes to order.

Mounting Details.

Imperial (standard).

Metric (alternative)

Bush 3/8" x 32TPI (Whit.)

M10 x 0.75.

Shaft 0.25" dia.


6mm, dia.

Nut 0.525" A/F.

14mm A/F.

Variations.

1. Biased indexing is available giving momentary contact on positions 8 to 7, 5 to 4, 4 to 3, 3 to 2 and 2 to 1 as well as 3 position biased to centre.
2. Concentric shafts - dual concentric shafts and mechanisms for dual switching applications.
(Not available for 36° indexing).
3. Insulated shafts.
4. Electrostatic shields.
5. Printed circuit termination's - 2 types are available giving a variation in mounting height of the wafer above the P.C.board.
6. Adjustable stops - 2 types are available.
Front - can be set without dismantling the switch and are available on models MU-MA (a),(d) and A-MA with imperial bush.
Rear - for use with all other indexing variations both Imperial and Metric versions.

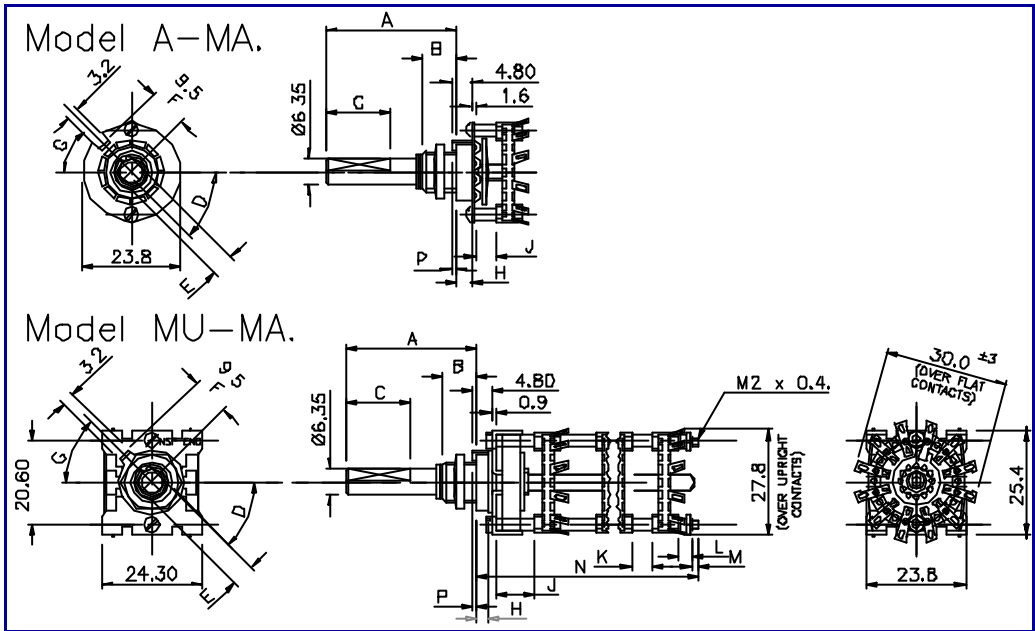

Dimensions Are In Millimetres

Key To Details

- | | | | |
|----|---|--------|---|
| A. | Shaft length: optional ± 0.40 (0.016") | H. | Bushing shoulder; standard 3,2 (0.125") |
| B. | Bushing thread length: preferred standard 9.5 (0.375"); 6.35 (0.250") available as an alternative. Special lengths if necessary | J. | Front spacer, minimum dimension: MU-MA 9,5 (0.375"), A-MA 5 |
| C. | Flat length: length to specification. Tolerance ± 0.40 (0.016"). Special shaft termination's may be provided to special requirements. | K. | Other spacers: minimum dimensions.
Clips facing same direction NIL.
Clips facing away or flat clips NIL.
Clips facing each other 3 |
| D. | Angle of flat: to specification $\pm 2^\circ$; specify position of flat, with switch shaft in fully anti-clockwise position when viewed from front or knob end. | L. | If no spacer 2,4 . Any length spacer desired may be inserted at this point. |
| E. | Flat thickness: standard 5.55 ± 0.15 for grub screws; 4.95 ± 0.05 for push-on knobs. | M
. | Thread extension: typically 3 x M2 x 0,4 any length desired. |
| F. | Distance of locating lug from shaft, centre line to centre line. | P. | Standard locating lug lengths:
unsealed, projects 1.6 beyond mounting face;
sealed, 0,05 / 0,15 below mounting face; |
| G. | Angle of locating lug: type MU mechanism; $45^\circ, 135^\circ, 225^\circ$ and 315° from horizontal centre line; the alternative "A" type mechanism also includes 0° and 180° as viewed. | | |