

Thyristor Module

$$V_{RRM} = 2 \times 1600V$$


$$I_{TAV} = 140A$$

$$V_T = 1.28V$$


Phase leg

Part number

MCMA140PD1600TB

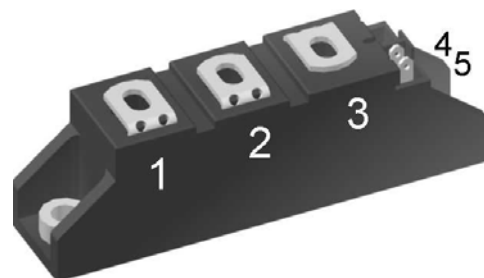

Backside: isolated



Features / Advantages:

- Thyristor for line frequency
- Planar passivated chip
- Long-term stability
- Direct Copper Bonded Al₂O₃-ceramic

Applications:


- Line rectifying 50/60 Hz
- Softstart AC motor control
- DC Motor control
- Power converter
- AC power control
- Lighting and temperature control

Package: TO-240AA

- Isolation Voltage: 4800V~
- Industry standard outline
- RoHS compliant
- Soldering pins for PCB mounting
- Base plate: DCB ceramic
- Reduced weight
- Advanced power cycling


Rectifier				Ratings			
Symbol	Definition	Conditions		min.	typ.	max.	Unit
$V_{RSM/DSM}$	max. non-repetitive reverse/forward blocking voltage	$T_{VJ} = 25^{\circ}\text{C}$				1700	V
$V_{RRM/DRM}$	max. repetitive reverse/forward blocking voltage	$T_{VJ} = 25^{\circ}\text{C}$				1600	V
I_{RD}	reverse current, drain current	$V_{R/D} = 1600\text{ V}$	$T_{VJ} = 25^{\circ}\text{C}$			100	μA
		$V_{R/D} = 1600\text{ V}$	$T_{VJ} = 140^{\circ}\text{C}$			10	mA
V_T	forward voltage drop	$I_T = 150\text{ A}$	$T_{VJ} = 25^{\circ}\text{C}$			1.29	V
		$I_T = 300\text{ A}$				1.63	V
		$I_T = 150\text{ A}$	$T_{VJ} = 125^{\circ}\text{C}$			1.28	V
		$I_T = 300\text{ A}$				1.70	V
I_{TAV}	average forward current	$T_C = 85^{\circ}\text{C}$	$T_{VJ} = 140^{\circ}\text{C}$			140	A
$I_{T(RMS)}$	RMS forward current	180° sine				220	A
V_{T0}	threshold voltage	} for power loss calculation only	$T_{VJ} = 140^{\circ}\text{C}$			0.85	V
r_T	slope resistance					2.8	m Ω
R_{thJC}	thermal resistance junction to case					0.22	K/W
R_{thCH}	thermal resistance case to heatsink				0.20		K/W
P_{tot}	total power dissipation		$T_C = 25^{\circ}\text{C}$			520	W
I_{TSM}	max. forward surge current	$t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}$	$T_{VJ} = 45^{\circ}\text{C}$			2.40	kA
		$t = 8,3\text{ ms}; (60\text{ Hz}), \text{ sine}$	$V_R = 0\text{ V}$			2.59	kA
		$t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}$	$T_{VJ} = 140^{\circ}\text{C}$			2.04	kA
		$t = 8,3\text{ ms}; (60\text{ Hz}), \text{ sine}$	$V_R = 0\text{ V}$			2.21	kA
I^2t	value for fusing	$t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}$	$T_{VJ} = 45^{\circ}\text{C}$			28.8	kA ² s
		$t = 8,3\text{ ms}; (60\text{ Hz}), \text{ sine}$	$V_R = 0\text{ V}$			27.9	kA ² s
		$t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}$	$T_{VJ} = 140^{\circ}\text{C}$			20.8	kA ² s
		$t = 8,3\text{ ms}; (60\text{ Hz}), \text{ sine}$	$V_R = 0\text{ V}$			20.2	kA ² s
C_J	junction capacitance	$V_R = 400\text{ V}$ $f = 1\text{ MHz}$	$T_{VJ} = 25^{\circ}\text{C}$		119		pF
P_{GM}	max. gate power dissipation	$t_P = 30\text{ }\mu\text{s}$	$T_C = 140^{\circ}\text{C}$			10	W
		$t_P = 300\text{ }\mu\text{s}$				5	W
P_{GAV}	average gate power dissipation					0.5	W
$(di/dt)_{cr}$	critical rate of rise of current	$T_{VJ} = 140^{\circ}\text{C}; f = 50\text{ Hz}$ repetitive, $I_T = 450\text{ A}$				150	A/ μs
		$t_P = 200\text{ }\mu\text{s}; di_G/dt = 0.45\text{ A}/\mu\text{s};$ $I_G = 0.45\text{ A}; V_D = \frac{2}{3} V_{DRM}$ non-repet., $I_T = 150\text{ A}$				500	A/ μs
$(dv/dt)_{cr}$	critical rate of rise of voltage	$V_D = \frac{2}{3} V_{DRM}$ $R_{GK} = \infty$; method 1 (linear voltage rise)	$T_{VJ} = 140^{\circ}\text{C}$			1000	V/ μs
V_{GT}	gate trigger voltage	$V_D = 6\text{ V}$	$T_{VJ} = 25^{\circ}\text{C}$			1.5	V
			$T_{VJ} = -40^{\circ}\text{C}$			1.6	V
I_{GT}	gate trigger current	$V_D = 6\text{ V}$	$T_{VJ} = 25^{\circ}\text{C}$			150	mA
			$T_{VJ} = -40^{\circ}\text{C}$			200	mA
V_{GD}	gate non-trigger voltage	$V_D = \frac{2}{3} V_{DRM}$	$T_{VJ} = 140^{\circ}\text{C}$			0.2	V
I_{GD}	gate non-trigger current					10	mA
I_L	latching current	$t_P = 10\text{ }\mu\text{s}$	$T_{VJ} = 25^{\circ}\text{C}$			200	mA
		$I_G = 0.45\text{ A}; di_G/dt = 0.45\text{ A}/\mu\text{s}$					
I_H	holding current	$V_D = 6\text{ V}$ $R_{GK} = \infty$	$T_{VJ} = 25^{\circ}\text{C}$			200	mA
t_{gd}	gate controlled delay time	$V_D = \frac{1}{2} V_{DRM}$	$T_{VJ} = 25^{\circ}\text{C}$			2	μs
		$I_G = 0.45\text{ A}; di_G/dt = 0.45\text{ A}/\mu\text{s}$					
t_q	turn-off time	$V_R = 100\text{ V}; I_T = 150\text{ A}; V_D = \frac{2}{3} V_{DRM}$ $di/dt = 10\text{ A}/\mu\text{s}; dv/dt = 20\text{ V}/\mu\text{s}; t_P = 200\text{ }\mu\text{s}$	$T_{VJ} = 140^{\circ}\text{C}$		185		μs

Package TO-240AA				Ratings				
Symbol	Definition	Conditions		min.	typ.	max.	Unit	
I _{RMS}	RMS current	per terminal				200	A	
T _{stg}	storage temperature			-40		125	°C	
T _{VJ}	virtual junction temperature			-40		140	°C	
Weight					90		g	
M _D	mounting torque			2.5		4	Nm	
M _T	terminal torque			2.5		4	Nm	
d _{Spp/App}	creepage distance on surface striking distance through air	terminal to terminal	13.0	9.7			mm	
d _{Spb/Apb}		terminal to backside	16.0	16.0			mm	
V _{ISOL}	isolation voltage	t = 1 second	50/60 Hz, RMS; I _{ISOL} ≤ 1 mA		4800			V
		t = 1 minute			4000			V

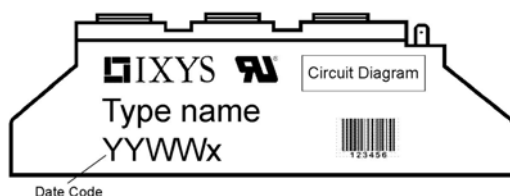
Part number

M = Module
 C = Thyristor (SCR)
 M = Thyristor
 A = (up to 1800V)
 140 = Current Rating [A]
 PD = Phase leg
 1600 = Reverse Voltage [V]
 TB = TO-240AA-1B

Ordering	Part Number	Marking on Product	Delivery Mode	Quantity	Code No.
Standard	MCMA140PD1600TB	MCMA140PD1600TB	Box	6	509348

Equivalent Circuits for Simulation
** on die level*
 $T_{VJ} = 140^{\circ}\text{C}$

Thyristor

$V_{0\max}$	threshold voltage	0.85	V
$R_{0\max}$	slope resistance *	1.6	mΩ

Technical drawing of a 5-pin D-sub connector. The drawing shows the front and side views with the following dimensions in mm:

- Overall width: 92 ± 0.5
- Distance from mounting hole center to pin 1 center: 80 ± 0.3
- Pin 1 diameter: $M5$
- Pin 2 diameter: 25 ± 0.3
- Pin 3 diameter: 45 ± 0.3
- Pin 4 diameter: 65 ± 0.3
- Pin 5 diameter: 25 ± 0.3
- Pin 6 diameter: 45 ± 0.3
- Pin 7 diameter: 65 ± 0.3
- Pin 8 diameter: 25 ± 0.3
- Pin 9 diameter: 45 ± 0.3
- Pin 10 diameter: 65 ± 0.3
- Pin 11 diameter: 25 ± 0.3
- Pin 12 diameter: 45 ± 0.3
- Pin 13 diameter: 65 ± 0.3
- Pin 14 diameter: 25 ± 0.3
- Pin 15 diameter: 45 ± 0.3
- Pin 16 diameter: 65 ± 0.3
- Pin 17 diameter: 25 ± 0.3
- Pin 18 diameter: 45 ± 0.3
- Pin 19 diameter: 65 ± 0.3
- Pin 20 diameter: 25 ± 0.3
- Pin 21 diameter: 45 ± 0.3
- Pin 22 diameter: 65 ± 0.3
- Pin 23 diameter: 25 ± 0.3
- Pin 24 diameter: 45 ± 0.3
- Pin 25 diameter: 65 ± 0.3
- Pin 26 diameter: 25 ± 0.3
- Pin 27 diameter: 45 ± 0.3
- Pin 28 diameter: 65 ± 0.3
- Pin 29 diameter: 25 ± 0.3
- Pin 30 diameter: 45 ± 0.3
- Pin 31 diameter: 65 ± 0.3
- Pin 32 diameter: 25 ± 0.3
- Pin 33 diameter: 45 ± 0.3
- Pin 34 diameter: 65 ± 0.3
- Pin 35 diameter: 25 ± 0.3
- Pin 36 diameter: 45 ± 0.3
- Pin 37 diameter: 65 ± 0.3
- Pin 38 diameter: 25 ± 0.3
- Pin 39 diameter: 45 ± 0.3
- Pin 40 diameter: 65 ± 0.3
- Pin 41 diameter: 25 ± 0.3
- Pin 42 diameter: 45 ± 0.3
- Pin 43 diameter: 65 ± 0.3
- Pin 44 diameter: 25 ± 0.3
- Pin 45 diameter: 45 ± 0.3
- Pin 46 diameter: 65 ± 0.3
- Pin 47 diameter: 25 ± 0.3
- Pin 48 diameter: 45 ± 0.3
- Pin 49 diameter: 65 ± 0.3
- Pin 50 diameter: 25 ± 0.3
- Pin 51 diameter: 45 ± 0.3
- Pin 52 diameter: 65 ± 0.3
- Pin 53 diameter: 25 ± 0.3
- Pin 54 diameter: 45 ± 0.3
- Pin 55 diameter: 65 ± 0.3
- Pin 56 diameter: 25 ± 0.3
- Pin 57 diameter: 45 ± 0.3
- Pin 58 diameter: 65 ± 0.3
- Pin 59 diameter: 25 ± 0.3
- Pin 60 diameter: 45 ± 0.3
- Pin 61 diameter: 65 ± 0.3
- Pin 62 diameter: 25 ± 0.3
- Pin 63 diameter: 45 ± 0.3
- Pin 64 diameter: 65 ± 0.3
- Pin 65 diameter: 25 ± 0.3
- Pin 66 diameter: 45 ± 0.3
- Pin 67 diameter: 65 ± 0.3
- Pin 68 diameter: 25 ± 0.3
- Pin 69 diameter: 45 ± 0.3
- Pin 70 diameter: 65 ± 0.3
- Pin 71 diameter: 25 ± 0.3
- Pin 72 diameter: 45 ± 0.3
- Pin 73 diameter: 65 ± 0.3
- Pin 74 diameter: 25 ± 0.3
- Pin 75 diameter: 45 ± 0.3
- Pin 76 diameter: 65 ± 0.3
- Pin 77 diameter: 25 ± 0.3
- Pin 78 diameter: 45 ± 0.3
- Pin 79 diameter: 65 ± 0.3
- Pin 80 diameter: 25 ± 0.3
- Pin 81 diameter: 45 ± 0.3
- Pin 82 diameter: 65 ± 0.3
- Pin 83 diameter: 25 ± 0.3
- Pin 84 diameter: 45 ± 0.3
- Pin 85 diameter: 65 ± 0.3
- Pin 86 diameter: 25 ± 0.3
- Pin 87 diameter: 45 ± 0.3
- Pin 88 diameter: 65 ± 0.3
- Pin 89 diameter: 25 ± 0.3
- Pin 90 diameter: 45 ± 0.3
- Pin 91 diameter: 65 ± 0.3
- Pin 92 diameter: 25 ± 0.3
- Pin 93 diameter: 45 ± 0.3
- Pin 94 diameter: 65 ± 0.3
- Pin 95 diameter: 25 ± 0.3
- Pin 96 diameter: 45 ± 0.3
- Pin 97 diameter: 65 ± 0.3
- Pin 98 diameter: 25 ± 0.3
- Pin 99 diameter: 45 ± 0.3
- Pin 100 diameter: 65 ± 0.3

Thyristor

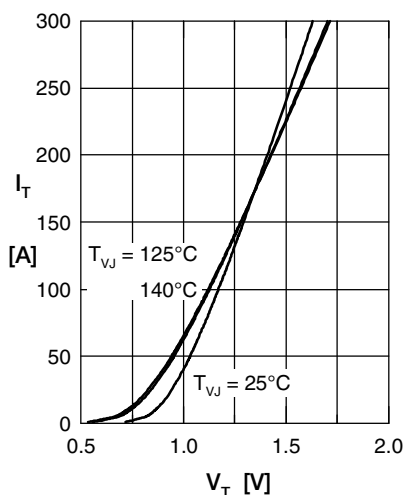


Fig. 1 Forward characteristics

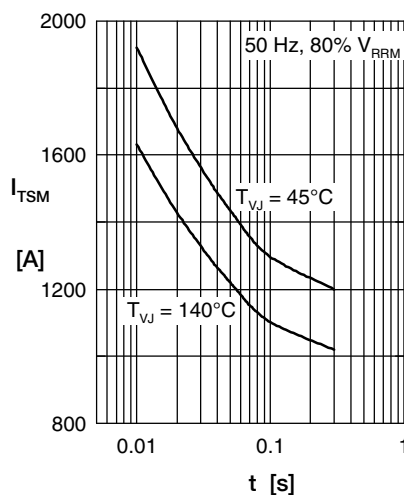


Fig. 2 Surge overload current
 I_{TSM} : crest value, t : duration

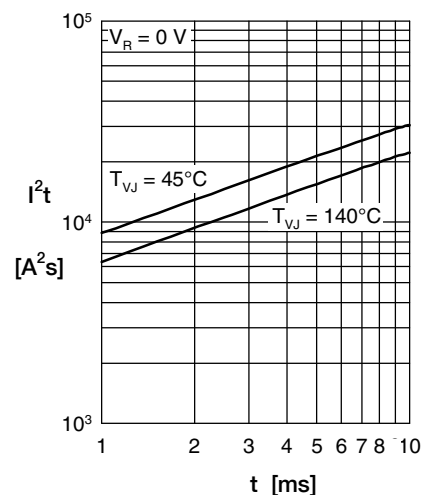


Fig. 3 I^2t versus time (1-10 s)

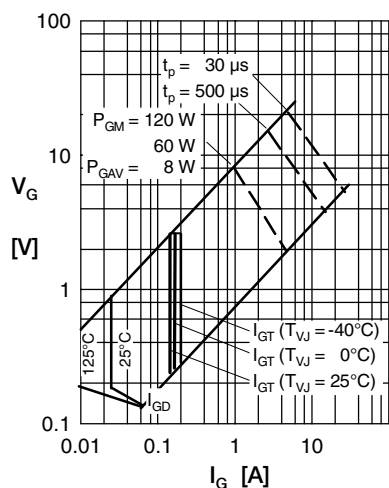


Fig. 4 Gate voltage & gate current

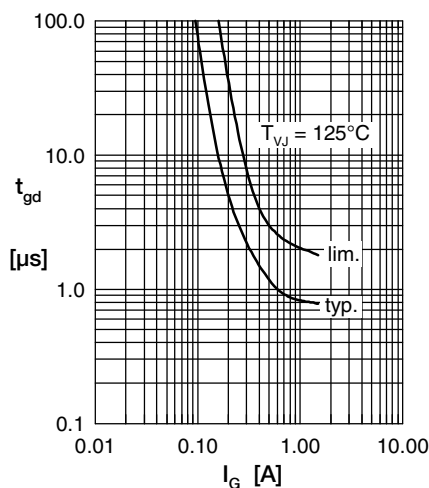


Fig. 5 Gate controlled delay time t_{gd}

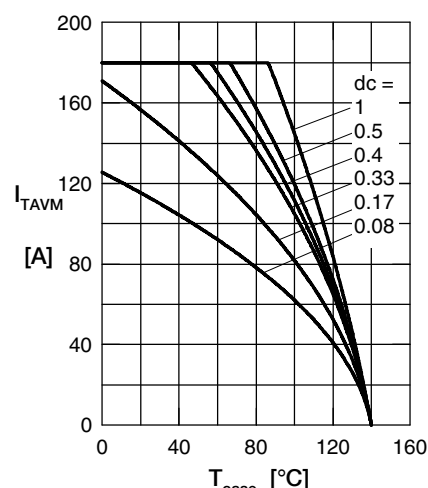


Fig. 6 Max. forward current at case temperature

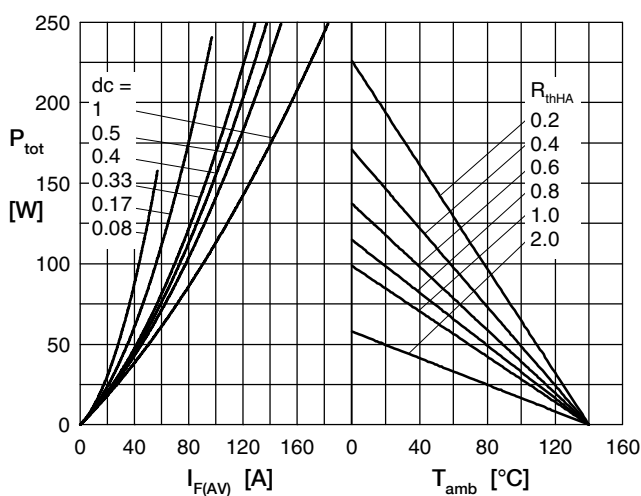


Fig. 7a Power dissipation versus direct output current
Fig. 7b and ambient temperature

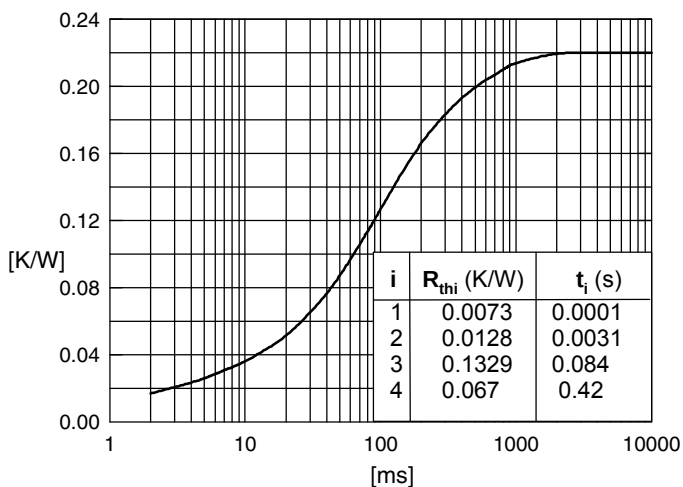


Fig. 8 Transient thermal impedance junction to case