
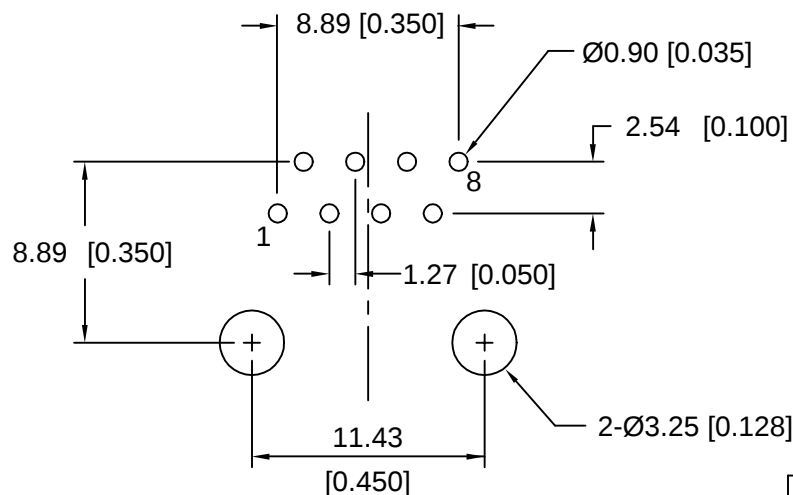
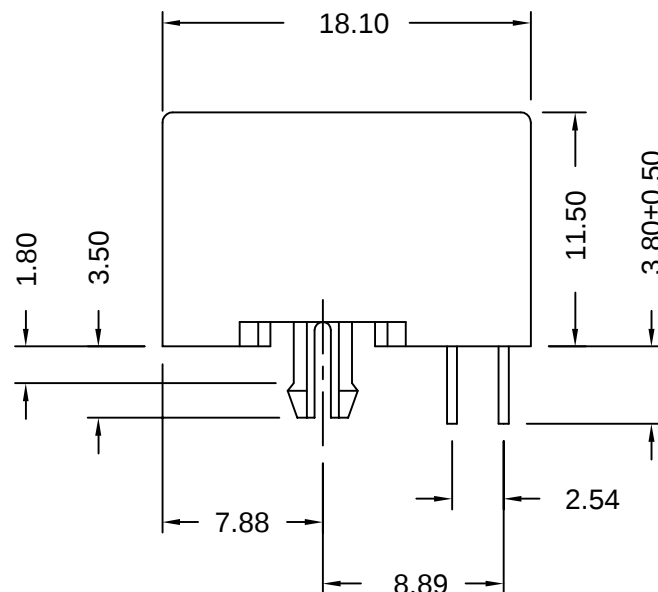


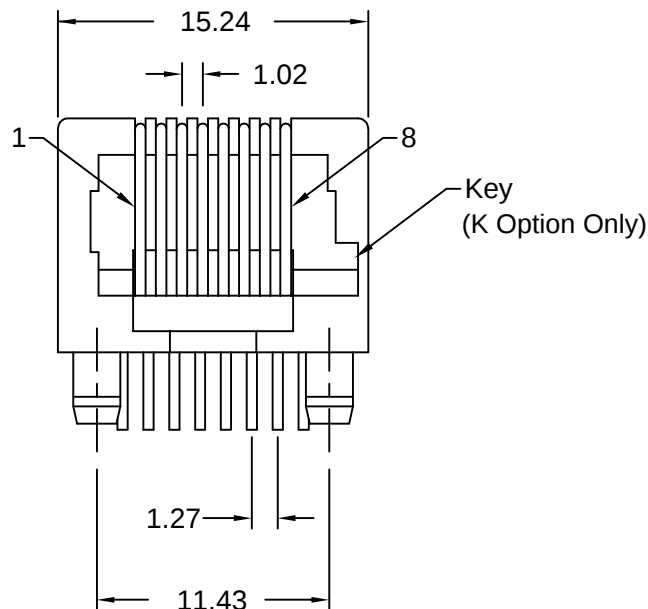

Recommended PCB Layout
(Top View)

Part Number	Contact Area Plating Finish
GM-N-88K	15u" Gold (standard)
GM-N-88K-50	50u" Gold (50 option)

Materials and Finish

Housing Material-
PBT Thermoplastic
UL 94V-0 Rated
Color: Black

Design meets UL 1863 Sec. 8
Electrical Probe and Sec. 20
Child Finger test requirements

Contact Material-
Phosphor Bronze

Contact Plating Options-
Standard: 0.0001" Nickel
Plating, Selective Plating
0.000015" Gold on Contact
Area, Gold on Entire Contact

50 Option: 0.0001" Nickel Plating,
Selective Plating 0.000050"
Gold on Contact Area to
Comply with FCC Requirements
Under No. 47 C.F.R. Part 68,
Subpart F, Gold on Entire Contact

Electrical Characteristics

Insulation Resistance-
500 Megohms min.

Dielectric Withstanding Voltage-
1000V rms, 60Hz

Contact Resistance-
20 milliohms max.

Current Rating-
1.5 Amps

Operating Temperature-
-40°C to +80°C

Durability Rating-
500 mating cycles min.

CSA Certified File No. LR78160
UL Recognized File No. E134345

Tolerances
X.X ± 0.25
X.XX ± 0.15
Unless Stated Otherwise

REVISION	DATE	DESCRIPTION	DRAWN BY	REV CHECK BY	UNITS
C	11/23/98	Rev PCB Layout	J. Kring	T. Gokcek	mm [in]
C1	4/24/01	ECD 01-056	REVISION BY	CHECK DATE	DATE
C2	3/28/03	ECD 03-011	C. Leiva	4/3/03	1/26/98

GM-N-88K

Right Angle Modular Jack

8 position, 8 contacts, Keyed



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Kycon:](#)

[GM-N-88K-50](#) [GM-N-88K](#)