

Coupling relays Solid-state relays



flare-230 V AC
Input 230 V AC
Output 48 V DC 0.5 A
 Approvals: 


flare-24 V DC
Input 24 V DC
Output 230 V AC 0.5 A
 Approvals:    




Coupling relays Solid-state relays *interface*

Circuit diagrams: *flare* – solid-state relays


24 V/48 V DC; 500 mA; 2 A




115 V AC/DC / 48 V DC; 500 mA



230 V AC / 48 V DC; 500 mA




24 V DC / 230 V AC; 500 mA



Derating: solid-state relays

24VDC/48VDC-0,5A

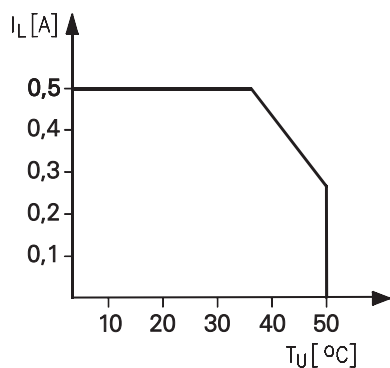

**115V AC/DC / 48 V DC; 500 mA
230 V AC / 48 V DC; 500 mA
24 V DC / 230 V AC; 500 mA**

