

# Hi-Q® High RF Power MLC Surface Mount Capacitors

For 600V to 7200V Applications





## PRODUCT OFFERING

Hi-Q®, high RF power, surface mount MLC capacitors from AVX Corporation are characterized with ultra-low ESR and dissipation factor at high frequencies. They are designed to handle high power and high voltage levels for applications in RF power amplifiers, inductive heating, high magnetic field environments (MRI coils), medical and industrial electronics.

## HOW TO ORDER

| AVX Style | Voltage   | Temperature Coefficient | Capacitance Code                      | Capacitance Tolerance | Test Level   | Termination*                          | Packaging        |
|-----------|-----------|-------------------------|---------------------------------------|-----------------------|--------------|---------------------------------------|------------------|
| HQCC      | 300V = 9  | C0G = A                 | (2 significant digits + no. of zeros) | B = 0.1pF (<8.2pF)    | A = Standard | T = Plated Ni and Sn (RoHS Compliant) | 1A = 7" Reel*    |
| HQCE      | 500V = 7  | P90 = M                 | Examples:                             | C = ±0.25pF (<8.2pF)  |              | J = 5% Min Pb                         | 6A = Waffle Pack |
| HQLC      | 800V = U  |                         | 4.7 pF = 4R7                          | D = ±0.50pF (<8.2pF)  |              | 7 = Plated Ni and Au                  |                  |
| HQLE      | 1000V = A |                         | 10 pF = 100                           | F = ±1% (≥10pF)       |              | A = Axial Ribbon                      |                  |
|           | 1500V = S |                         | 100 pF = 101                          | G = ±2%               |              | M = Microstrip                        |                  |
|           | 2500V = W |                         | 1,000 pF = 102                        | J = ±5%               |              | H = Cu/Sn (Non-Magnetic)              |                  |
|           | 3000V = H |                         |                                       | K = ±10%              |              | 4 = Axial Ribbon (Non-Magnetic)       |                  |
|           | 3600V = J |                         |                                       | M = ±20%              |              | 5 = Microstrip (Non-Magnetic)         |                  |
|           | 5000V = K |                         |                                       |                       |              |                                       |                  |
|           | 7200V = M |                         |                                       |                       |              |                                       |                  |

## DIMENSIONS

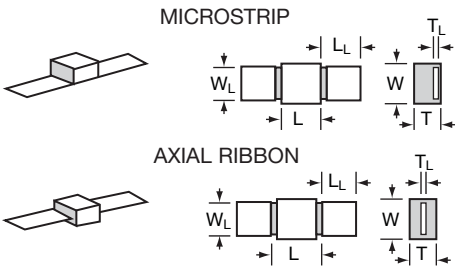

| STYLE              | HQCC                                                                                                 | HQCE                                      |
|--------------------|------------------------------------------------------------------------------------------------------|-------------------------------------------|
| (L) Length         | 5.84 +0.51 -0.25<br>(0.230 +0.020 -0.010)                                                            | 9.65 +0.38 -0.25<br>(0.380 +0.015 -0.010) |
| (W) Width          | 6.35 ± 0.38<br>(0.250 ± 0.015)                                                                       | 9.65 ± 0.25<br>(0.380 ± 0.010)            |
| (T) Thickness Max. | 3.68 (0.145) max. for capacitance values ≤ 680pF<br>4.19 (0.165) max. for capacitance values > 680pF | 4.32 (0.170) max.                         |
| (Y) Overlap        | 1.20 ± (0.040) max.                                                                                  | 1.02 ± (0.040) max.                       |

| STYLE                            | HQLC                                                                                                 | HQLE                                                                        |
|----------------------------------|------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|
| (L) Length                       | 6.22 ± 0.64<br>(0.245 ± 0.025)                                                                       | 9.65 +0.89 -0.25<br>(0.380 +0.035 -0.010)                                   |
| (W) Width                        | 6.35 ± 0.38<br>(0.250 ± 0.015)                                                                       | 9.65 ± 0.25<br>(0.380 ± 0.010)                                              |
| (T) Thickness Max.               | 3.68 (0.145) max. for capacitance values ≤ 680pF<br>4.19 (0.165) max. for capacitance values ≤ 680pF | 4.32 (0.170) max.                                                           |
| (Y) Overlap                      | N/A                                                                                                  | N/A                                                                         |
| (L <sub>L</sub> ) Lead Length    | 12.7 min.<br>(0.500)                                                                                 | 19.05<br>(0.750)                                                            |
| (W <sub>L</sub> ) Lead Width     | 6.10 ± 0.127<br>(0.240 ± 0.005)                                                                      | 8.89 ± 0.25<br>(0.350 ± 0.010)                                              |
| (T <sub>L</sub> ) Lead Thickness | 0.102 ±0.025<br>(0.004 ± 0.001)                                                                      | 0.25 ± 0.13<br>(0.010 ±0.005)                                               |
| Lead Material                    | High Purity Silver Leads<br>Leads are attached with High Temperature Solder                          | High Purity Silver Leads<br>Leads are attached with High Temperature Solder |

Not RoHS Compliant



For RoHS compliant products,  
please select correct termination style.



# Hi-Q® High RF Power MLC Surface Mount Capacitors

For 600V to 7200V Applications



## DIELECTRIC PERFORMANCE CHARACTERISTICS

|                                    |                                                                                                                                                                                                                                       |
|------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Capacitance Range</b>           | 1.0pF to 2,700pF<br>(25°C, 1.0 ±0.2 Vrms at 1kHz, for ≤ 1000 pF use 1MHz)                                                                                                                                                             |
| <b>Capacitance Tolerances</b>      | ±0.10pF, ±0.25pF, ±0.50pF, ±1%, ±2%, ±5%, ±10%, ±20%                                                                                                                                                                                  |
| <b>Dissipation Factor 25°C</b>     | 0.1% Max (+25°C, 1.0 ±0.2 Vrms at 1kHz, for ≤ 1000 pF use 1MHz)                                                                                                                                                                       |
| <b>Operating Temperature Range</b> | -55°C to +125°C                                                                                                                                                                                                                       |
| <b>Temperature Characteristic</b>  | C0G: 0 ± 30 ppm/°C (-55°C to +125°C), P90: 90 ± 30 ppm/°C (-55°C to +125°C)                                                                                                                                                           |
| <b>Insulation Resistance</b>       | 100K MΩ min. @ +25°C and 500VDC<br>10K MΩ min. @ +125°C and 500VDC                                                                                                                                                                    |
| <b>Dielectric Strength</b>         | 250% of WVDC for capacitors rated at 500 volts DC or less for 5 seconds.<br>150% of WVDC for capacitors rated at 1250 volts DC or less for 5 seconds.<br>120% of WVDC for capacitors rated above 1250 volts DC or less for 5 seconds. |

## HQCC CAPACITANCE VALUES (A DIELECTRIC)

| Cap Code | Cap (pF) | Tol.    | Rated WVDC | Cap Code | Cap (pF) | Tol.    | Rated WVDC | Cap Code | Cap (pF) | Tol.            | Rated WVDC | Cap Code | Cap (pF) | Tol.            | Rated WVDC |
|----------|----------|---------|------------|----------|----------|---------|------------|----------|----------|-----------------|------------|----------|----------|-----------------|------------|
| 1R0      | 1.0      | B, C, D | 2500       | 8R2      | 8.2      | B, C, D | 2500       | 680      | 68       | F, G, J<br>K, M | 2500       | 471      | 470      | F, G, J<br>K, M | 1500       |
| 1R2      | 1.2      |         |            | 100      | 10       | 820     |            | 82       | 561      |                 |            | 560      | 1000     |                 |            |
| 1R5      | 1.5      |         |            | 120      | 12       | 101     |            | 100      | 681      |                 |            | 680      |          |                 |            |
| 1R8      | 1.8      |         |            | 150      | 15       | 121     |            | 120      | 821      |                 |            | 820      |          |                 |            |
| 2R2      | 2.2      |         |            | 180      | 18       | 151     |            | 150      | 102      |                 |            | 1000     |          |                 |            |
| 2R7      | 2.7      |         |            | 220      | 22       | 181     |            | 180      | 122      |                 |            | 1200     |          |                 |            |
| 3R3      | 3.3      |         |            | 270      | 27       | 221     |            | 220      | 152      |                 |            | 1500     | 500      |                 |            |
| 3R9      | 3.9      |         |            | 330      | 33       | 271     |            | 270      | 182      |                 |            | 1800     | 300      |                 |            |
| 4R7      | 4.7      |         |            | 390      | 39       | 331     |            | 330      | 1500     |                 | 222        | 2200     |          |                 |            |
| 5R6      | 5.6      |         |            | 470      | 47       |         |            | 391      | 390      |                 |            | 272      | 2700     |                 |            |
| 6R8      | 6.8      |         |            | 560      | 56       |         |            |          |          |                 |            |          |          |                 |            |

## HQCC CAPACITANCE VALUES (M DIELECTRIC)

| Cap Code | Cap (pF) | Tol.    | Rated WVDC |          | Cap Code | Cap (pF) | Tol.            | Rated WVDC |          | Cap Code | Cap (pF) | Tol.            | Rated WVDC |          |
|----------|----------|---------|------------|----------|----------|----------|-----------------|------------|----------|----------|----------|-----------------|------------|----------|
|          |          |         | Standard   | Extended |          |          |                 | Standard   | Extended |          |          |                 | Standard   | Extended |
| 1R0      | 1.0      | B, C, D | 2500       | 3600     | 100      | 10       | F, G, J<br>K, M | 2500       | 3600     | 161      | 160      | F, G, J<br>K, M | 2500       | 3000     |
| 1R1      | 1.1      |         |            |          | 110      | 11       |                 |            |          | 181      | 180      |                 |            |          |
| 1R2      | 1.2      |         |            |          | 120      | 12       |                 |            |          | 201      | 200      |                 |            |          |
| 1R3      | 1.3      |         |            |          | 130      | 13       |                 |            |          | 221      | 220      |                 |            |          |
| 1R4      | 1.4      |         |            |          | 150      | 15       |                 |            |          | 241      | 240      |                 |            |          |
| 1R5      | 1.5      |         |            |          | 160      | 16       |                 |            |          | 271      | 270      |                 |            |          |
| 1R6      | 1.6      |         |            |          | 180      | 18       |                 |            |          | 301      | 300      |                 |            |          |
| 1R7      | 1.7      |         |            |          | 200      | 20       |                 |            |          | 331      | 330      |                 | 1500       | 2000     |
| 1R8      | 1.8      |         |            |          | 220      | 22       |                 |            |          | 331      | 330      |                 |            |          |
| 1R9      | 1.9      |         |            |          | 240      | 24       |                 |            |          | 361      | 360      |                 |            |          |
| 2R0      | 2.0      |         |            |          | 270      | 27       |                 |            |          | 391      | 390      |                 |            |          |
| 2R1      | 2.1      |         |            |          | 300      | 30       |                 |            |          | 431      | 430      |                 |            |          |
| 2R2      | 2.2      |         |            |          | 330      | 33       |                 |            |          | 471      | 470      |                 |            |          |
| 2R4      | 2.4      |         |            |          | 360      | 36       |                 |            |          | 511      | 510      |                 | 1000       | 1500     |
| 2R5      | 2.5      |         |            |          | 390      | 39       |                 |            |          | 561      | 560      |                 |            |          |
| 3R0      | 3.0      |         |            |          | 430      | 43       |                 |            |          | 621      | 620      |                 |            |          |
| 3R3      | 3.3      |         |            |          | 470      | 47       |                 |            |          | 681      | 680      |                 |            |          |
| 3R6      | 3.6      |         |            |          | 510      | 51       |                 |            |          | 751      | 750      |                 |            |          |
| 3R9      | 3.9      |         |            |          | 560      | 56       |                 |            |          | 821      | 820      |                 |            |          |
| 4R3      | 4.3      |         |            |          | 620      | 62       |                 |            |          | 911      | 910      |                 |            |          |
| 4R7      | 4.7      |         |            |          | 680      | 68       |                 |            |          | 102      | 1000     |                 | 500        | 800      |
| 5R1      | 5.1      |         |            |          | 750      | 75       |                 |            |          | 112      | 1100     |                 |            |          |
| 5R6      | 5.6      |         |            |          | 820      | 82       |                 |            |          | 122      | 1200     |                 |            |          |
| 6R2      | 6.2      |         |            |          | 910      | 91       |                 |            |          | 152      | 1500     |                 | 300        | 500      |
| 6R8      | 6.8      |         |            |          | 101      | 100      |                 |            |          | 182      | 1800     |                 |            |          |
| 7R5      | 7.5      |         |            |          | 111      | 110      |                 |            |          | 222      | 2200     |                 |            |          |
| 8R2      | 8.2      |         |            |          | 121      | 120      |                 | 3000       |          | 242      | 2400     |                 |            |          |
| 9R1      | 9.1      |         |            |          | 131      | 130      |                 |            |          | 272      | 2700     |                 |            |          |
|          |          |         |            |          | 151      | 150      |                 |            |          |          |          |                 |            |          |

# Hi-Q® High RF Power MLC Surface Mount Capacitors

For 600V to 7200V Applications



## HQCE CAPACITANCE VALUES (A DIELECTRIC)

| Cap Code | Cap (pF) | Tol.       | Rated WVDC |          | Cap Code | Cap (pF) | Tol.       | Rated WVDC |          | Cap Code | Cap (pF) | Tol.       | Rated WVDC |          |
|----------|----------|------------|------------|----------|----------|----------|------------|------------|----------|----------|----------|------------|------------|----------|
|          |          |            | Standard   | Extended |          |          |            | Standard   | Extended |          |          |            | Standard   | Extended |
| 1R0      | 1.0      | C, D       | 3600       | 7200     | 150      | 15       | G, J, K, M | 3600       | 7200     | 221      | 220      | G, J, K, M | 3600       | NA       |
| 1R2      | 1.2      |            |            |          | 180      | 18       |            |            |          | 271      | 270      |            |            |          |
| 1R5      | 1.5      |            |            |          | 220      | 22       |            |            |          | 331      | 330      |            |            |          |
| 1R8      | 1.8      |            |            |          | 270      | 27       |            |            |          | 391      | 390      |            |            |          |
| 2R2      | 2.2      |            |            |          | 330      | 33       |            |            |          | 471      | 470      |            |            |          |
| 2R7      | 2.7      |            |            |          | 390      | 39       |            |            |          | 561      | 560      |            |            |          |
| 3R3      | 3.3      |            |            |          | 470      | 47       |            |            | 681      | 680      |          |            |            |          |
| 3R9      | 3.9      |            |            |          | 560      | 56       |            |            | 821      | 820      |          |            |            |          |
| 4R7      | 4.7      |            |            |          | 680      | 68       |            |            | 102      | 1000     |          |            |            |          |
| 5R6      | 5.6      | G, J, K, M | 3600       | 7200     | 122      | 1200     | 1000       |            |          |          |          |            |            |          |
| 6R8      | 6.8      |            |            |          | 152      | 1500     |            |            |          |          |          |            |            |          |
| 8R2      | 8.2      |            |            |          | 182      | 1800     |            |            |          |          |          |            |            |          |
| 100      | 10       | G, J, K, M | 3600       | 7200     | 151      | 150      | G, J, K, M | 3600       | 7200     | 222      | 2200     | G, J, K, M | 5000       |          |
| 120      | 12       |            |            |          | 181      | 180      |            |            |          |          |          |            |            |          |

## HQCE CAPACITANCE VALUES (M DIELECTRIC)





| Cap Code | Cap (pF) | Tol.          | Rated WVDC |          | Cap Code | Cap (pF) | Tol.          | Rated WVDC |          | Cap Code | Cap (pF) | Tol.          | Rated WVDC |          |
|----------|----------|---------------|------------|----------|----------|----------|---------------|------------|----------|----------|----------|---------------|------------|----------|
|          |          |               | Standard   | Extended |          |          |               | Standard   | Extended |          |          |               | Standard   | Extended |
| 1R0      | 1.0      | B, C, D       | 3600       | 7200     | 180      | 18       | F, G, J, K, M | 3600       | 7200     | 331      | 330      | F, G, J, K, M | 3600       | NA       |
| 1R2      | 1.2      |               |            |          | 220      | 22       |               |            |          | 391      | 390      |               |            |          |
| 1R5      | 1.5      |               |            |          | 270      | 27       |               |            |          | 471      | 470      |               |            |          |
| 1R8      | 1.8      |               |            |          | 330      | 33       |               |            |          | 561      | 560      |               | 2500       |          |
| 2R2      | 2.2      |               |            |          | 390      | 39       |               |            |          | 681      | 680      |               |            |          |
| 2R7      | 2.7      |               |            |          | 470      | 47       |               |            |          | 821      | 820      |               | 1000       |          |
| 3R3      | 3.3      |               |            |          | 560      | 56       |               |            |          | 102      | 1000     |               |            |          |
| 3R9      | 3.9      |               |            |          | 680      | 68       |               |            |          | 122      | 1200     |               |            |          |
| 4R7      | 4.7      |               |            |          | 820      | 82       |               |            |          | 152      | 1500     |               |            |          |
| 5R6      | 5.6      |               |            |          | 101      | 100      |               |            |          | 182      | 1800     |               |            |          |
| 6R8      | 6.8      | 121           | 120        | 222      | 2200     | 500      |               |            |          |          |          |               |            |          |
| 8R2      | 8.2      | 151           | 150        | 272      | 2700     |          |               |            |          |          |          |               |            |          |
| 100      | 10       | 181           | 180        | 332      | 3300     |          |               |            |          |          |          |               |            |          |
| 120      | 12       | F, G, J, K, M |            |          | 221      | 220      | G, J K, M     |            |          | 472      | 4700     |               |            |          |
| 150      | 15       |               |            |          | 271      | 270      |               |            |          | 512      | 5100     |               |            |          |

# Hi-Q® High RF Power MLC Surface Mount Capacitors



For 600V to 7200V Applications



## HQCC PERFORMANCE CHARACTERISTICS (A DIELECTRIC)

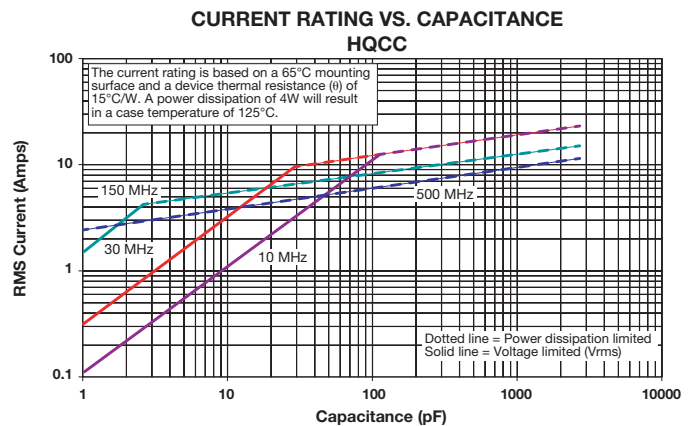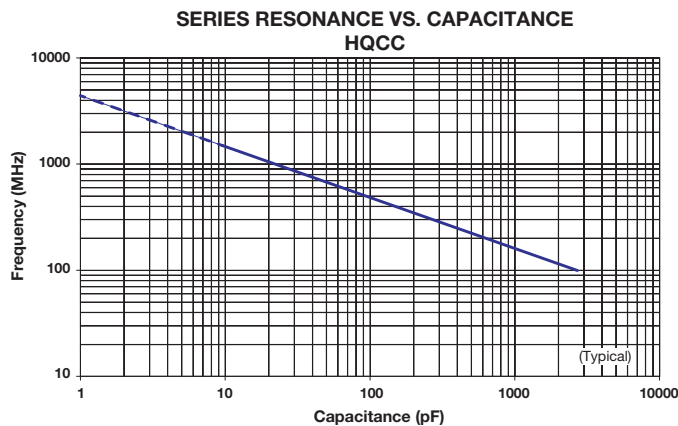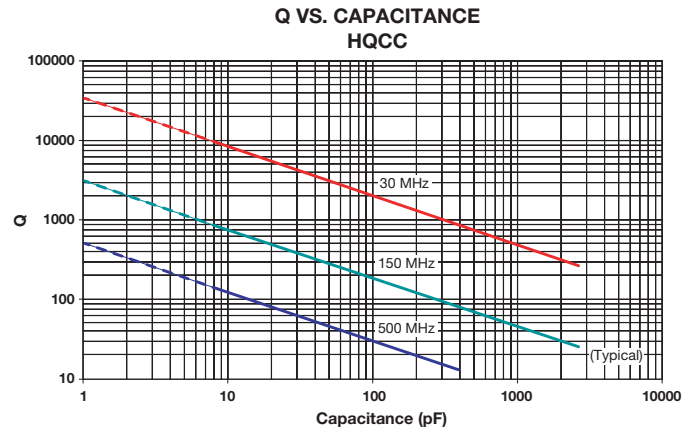
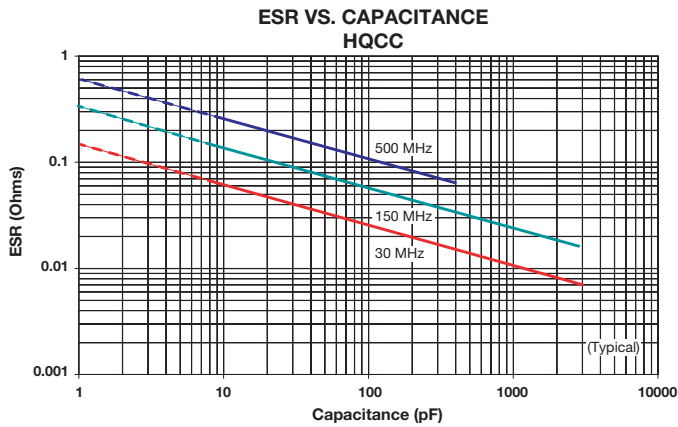


## HQCC PERFORMANCE CHARACTERISTICS (M DIELECTRIC)



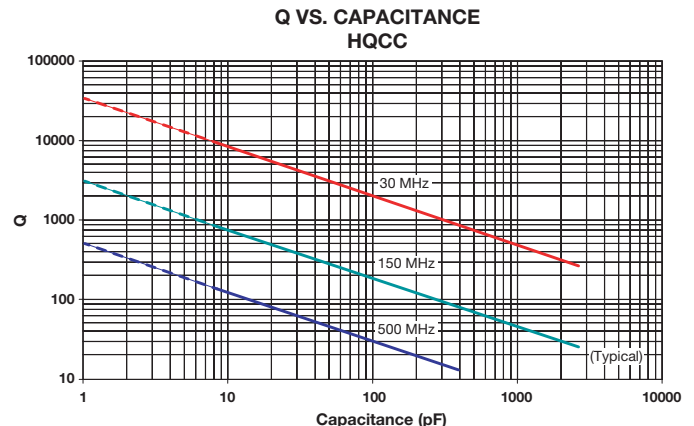
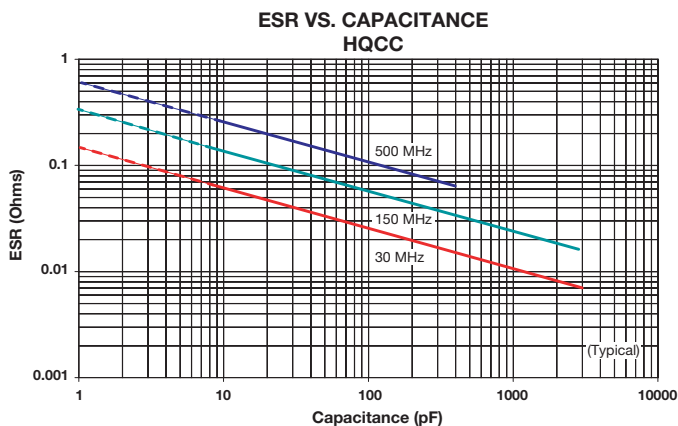


# Hi-Q® High RF Power MLC Surface Mount Capacitors

For 600V to 7200V Applications



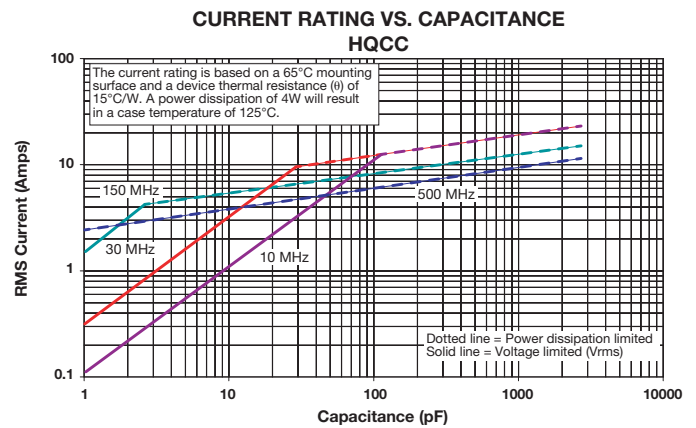
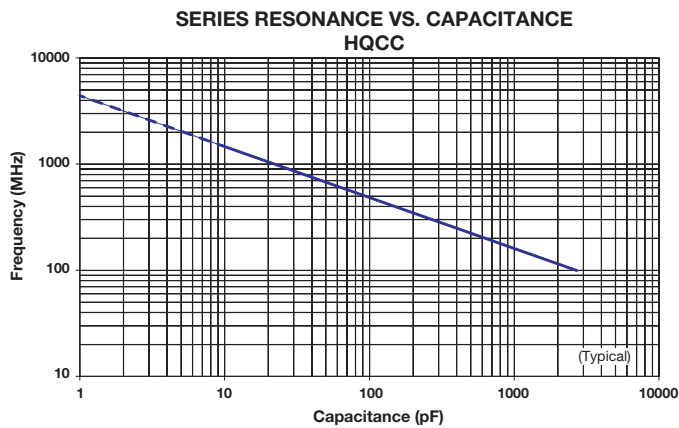


## HQCE PERFORMANCE CHARACTERISTICS (A DIELECTRIC)

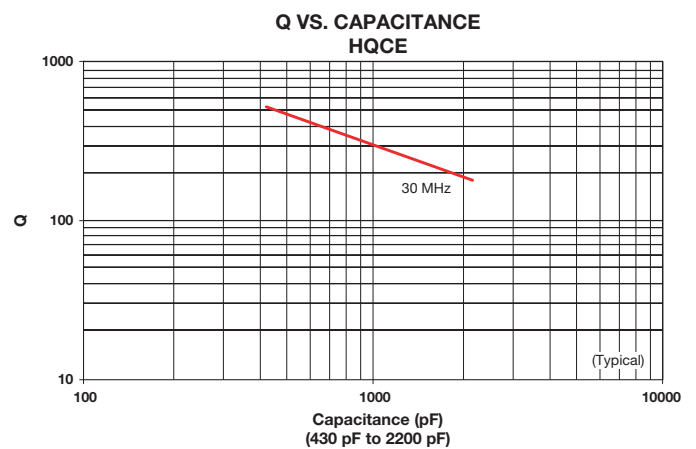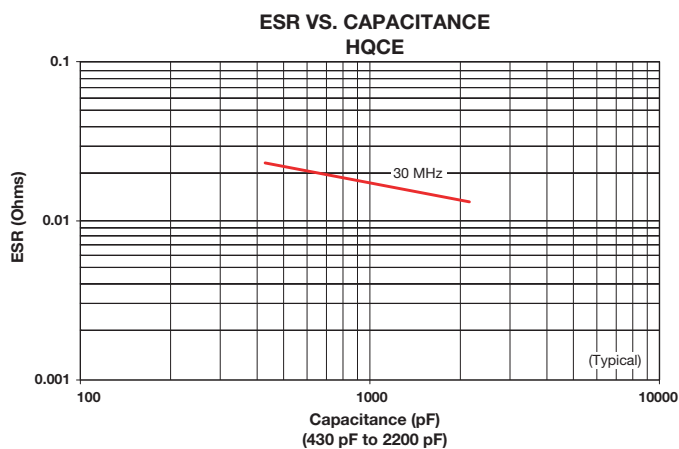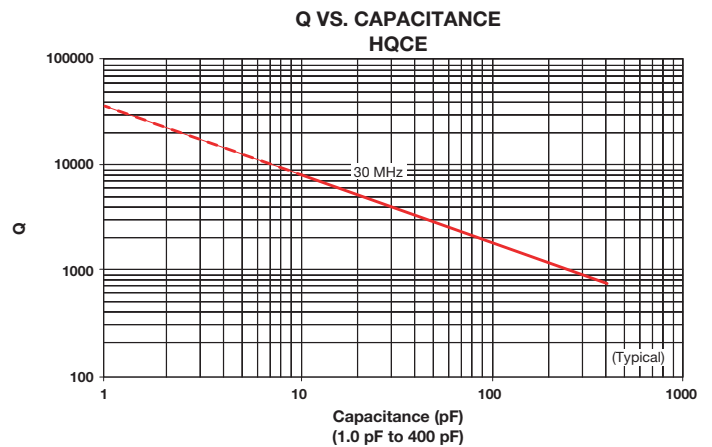
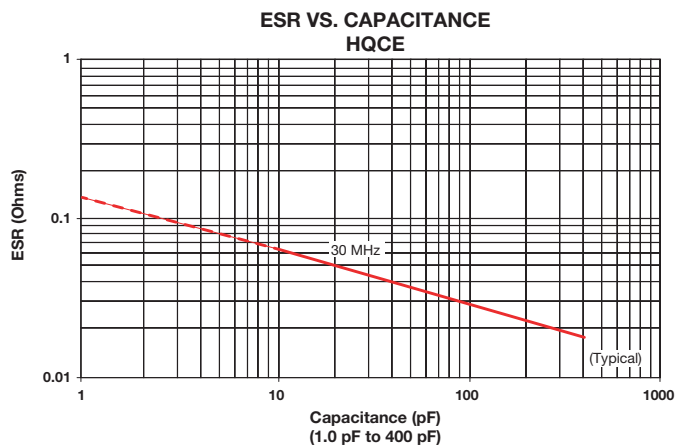


# Hi-Q® High RF Power MLC Surface Mount Capacitors

For 600V to 7200V Applications

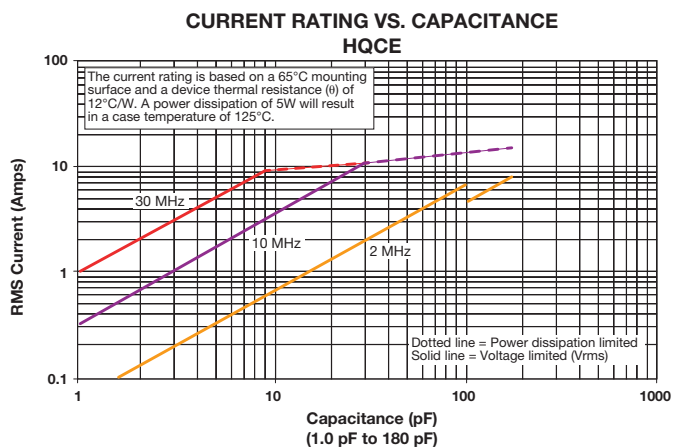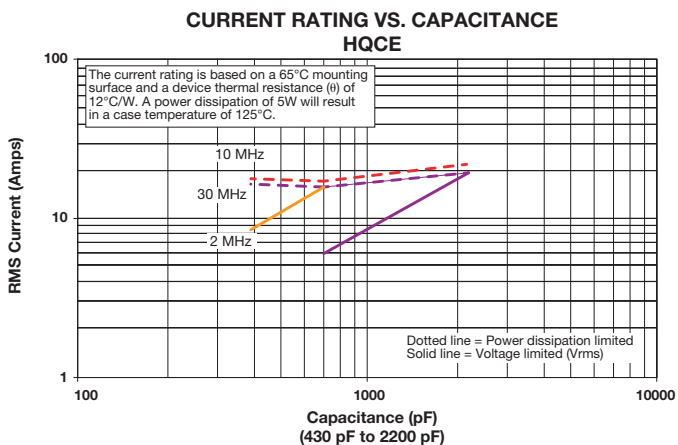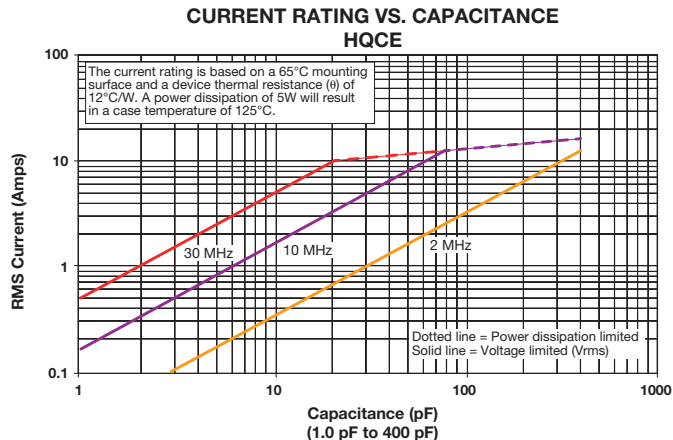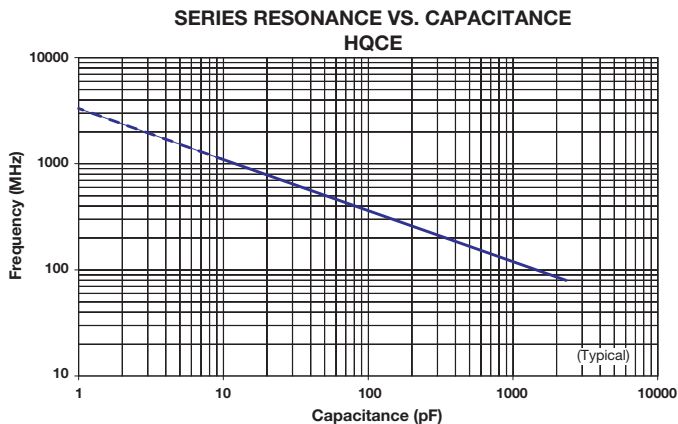

## HQCE PERFORMANCE CHARACTERISTICS (M DIELECTRIC)

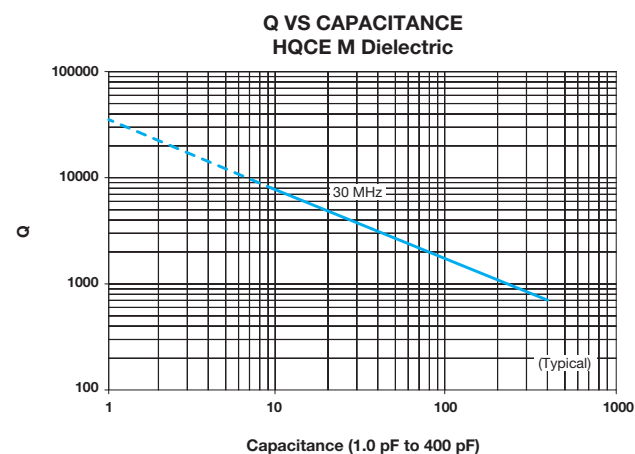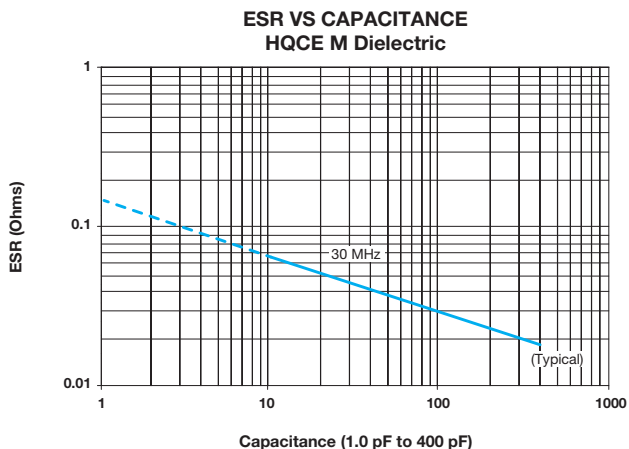


# Hi-Q® High RF Power MLC Surface Mount Capacitors


For 600V to 7200V Applications




**ESR VS CAPACITANCE**  
HQCE M Dielectric

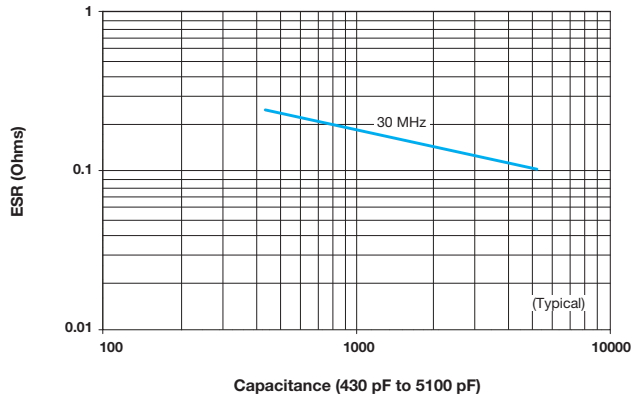


**Q VS CAPACITANCE**  
HQCE M Dielectric

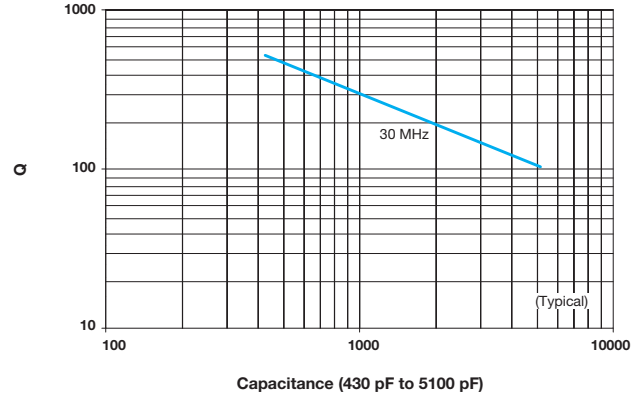


**SERIES RESONANCE VS CAPACITANCE**  
HQCE M Dielectric

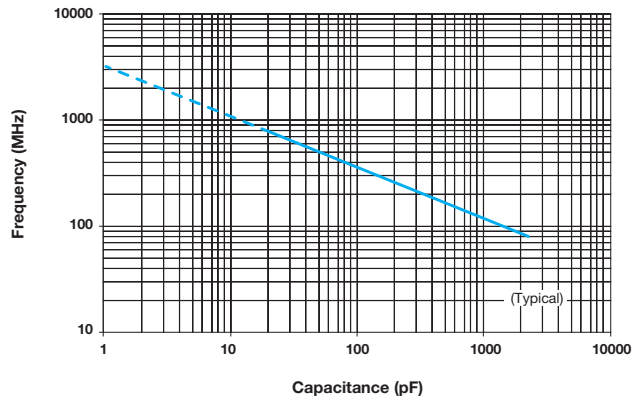

**CURRENT RATING VS CAPACITANCE**  
HQCE M Dielectric

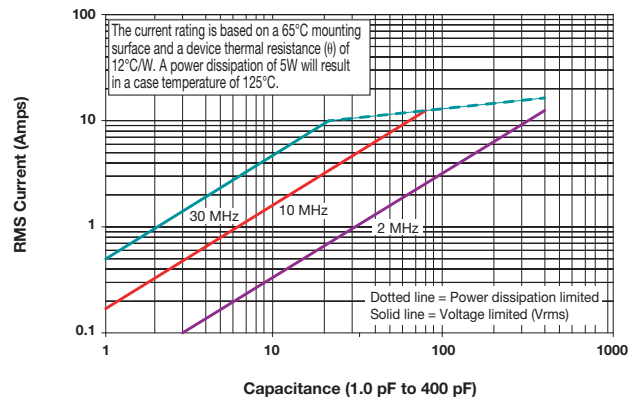

**CURRENT RATING VS CAPACITANCE**  
HQCE M Dielectric

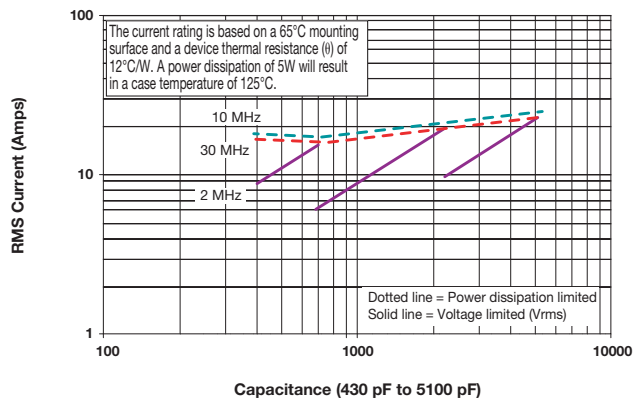

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## AVX:

[HQCEMA680FAT9A](#) [HQCEMA680FAT3A](#) [HQCEKA151JAT9A](#) [HQLCHA6R8CAM](#) [HQLCGA471GAM](#)  
[HQCCHA3R3DAT9A](#) [HQLCSA102GAM](#) [HQCEMA470JAT9A](#) [HQLEKA111JAM](#) [HQLEAA332GAM](#)  
[HQCEMA101JAT3A](#) [HQLEMA270JAM](#) [HQLCHA220DAM](#) [HQCEMA750FAT3A](#) [HQCEMA430FAT3A](#)  
[HQCEMA270FAT3A](#) [HQLCCA222GAM](#) [HQLEAA392GAM](#) [HQLCHA150DAM](#) [HQLEMA101KAA](#) [HQCCHA200GA19A](#)  
[HQCCHA180GA11A](#) [HQCCHA820KA11A](#) [HQCCHA131GA11A](#) [HQCCHA200GA11A](#) [HQCCHA330GAT9A](#)  
[HQCCHA101GA11A](#) [HQCCHA120GAT9A](#) [HQCCHA121GAT9A](#) [HQCCHA150GA11A](#) [HQCCHA151JA19A](#)  
[HQCCHA220GAT1A](#) [HQCCHA220GAT9A](#) [HQCCHA221GAT9A](#) [HQCCHA271GAT9A](#) [HQCCHA330GA11A](#)  
[HQCCHA390GAT9A](#) [HQCCHA4R7CA19A](#) [HQCCHA560GAT9A](#) [HQCCHA680GAT9A](#) [HQCCHA6R8CAT1A](#)  
[HQCCSA102KAT1A](#) [HQCCSA821GAT9A](#) [HQCCWA331GAT9A](#) [HQCCWA391GAT9A](#) [HQCECA682KAT3A](#)  
[HQCEGA122JAT9A](#) [HQCEGA182KAT3A](#) [HQCEGA182KAT9A](#) [HQCEHA561JAT9A](#) [HQCEHA681JA19A](#)  
[HQCEHA681JAT9A](#) [HQCEJA221JAT9A](#) [HQCEJA391JAT9A](#) [HQCEWA821JAT9A](#) [HQLCHA470KAM](#)  
[HQLCHA560KAM](#) [HQLCHA820KAM](#) [HQCCSA122FAT1A](#) [HQCEMA180JAT6A](#) [HQCEMA101JAT6A](#)  
[HQCEMA220JAT9A](#) [HQCEMA270JAT9A](#) [HQCEMA330JAT9A](#) [HQLEGA122GAM](#) [HQLEHA511GAM](#)  
[HQCC7M152GAH6A](#) [HQCC7M182GAH6A](#) [HQCC9M222GAH6A](#) [HQCC9M272GAH6A](#) [HQCCAM102GAH6A](#)  
[HQCCAM122GAH6A](#) [HQCCAM561GAH6A](#) [HQCCAM681GAH6A](#) [HQCCAM821GAH6A](#) [HQCCSM361GAH6A](#)  
[HQCCSM471GAH6A](#) [HQCCWM100GAH6A](#) [HQCCWM101GAH6A](#) [HQCCWM120GAH6A](#) [HQCCWM121GAH6A](#)  
[HQCCWM150GAH6A](#) [HQCCWM151GAH6A](#) [HQCCWM180GAH6A](#) [HQCCWM181GAH6A](#) [HQCCWM200GAH6A](#)  
[HQCCWM221GAH6A](#) [HQCCWM240GAH6A](#) [HQCCWM271GAH6A](#) [HQCCWM2R0BAH6A](#) [HQCCWM2R4BAH6A](#)  
[HQCCWM300GAH6A](#) [HQCCWM330GAH6A](#) [HQCCWM3R3BAH6A](#) [HQCCWM3R9BAH6A](#) [HQCCWM430GAH6A](#)  
[HQCCWM470GAH6A](#) [HQCCWM4R7BAH6A](#) [HQCCWM510GAH6A](#) [HQCCWM560GAH6A](#)