


features

- High Q factor
- Low T.C.C.
- Available in high capacitance values (up to 100 μ F)
- Products with lead-free terminations meet RoHS requirements

dimensions and construction

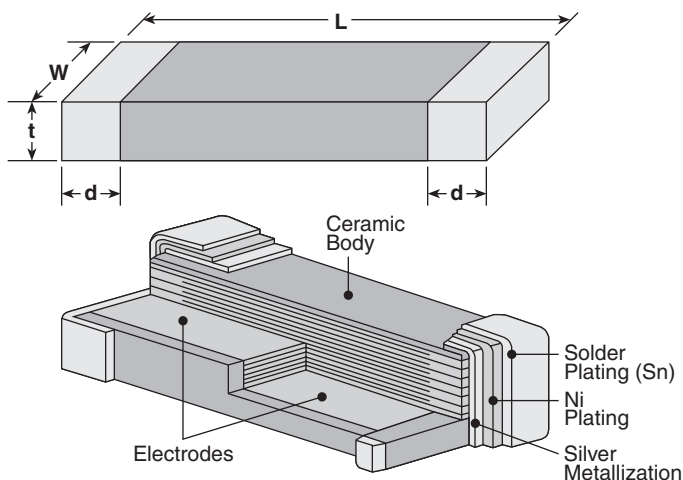

Case Size	Dimensions inches (mm)			
	L	W	t (Max.)	d
0402	.039 $\pm$.004 (1.0 $\pm$ 0.1)	.02 $\pm$.004 (0.5 $\pm$ 0.1)	.021 (0.55)	.01 $\pm$.006 (0.25 $\pm$ 0.15)
0603	.063 $\pm$.006 (1.6 $\pm$ 0.15)	.032 $\pm$.006 (0.81 $\pm$ 0.15)	.035 (0.9)	.014 $\pm$.006 (0.35 $\pm$ 0.15)
0805	.079 $\pm$.008 (2.01 $\pm$ 0.2)	.049 $\pm$.008 (1.25 $\pm$ 0.2)	.051 (1.3)	.02 $\pm$.01 (0.50 $\pm$ 0.25)
1206	.126 $\pm$.008 (3.2 $\pm$ 0.2)	.063 $\pm$.008 (1.6 $\pm$ 0.2)	.059 (1.5)	.02 $\pm$.01 (0.5 $\pm$ 0.25)
1210	.126 $\pm$.008 (3.2 $\pm$ 0.2)	.098 $\pm$.008 (2.5 $\pm$ 0.2)	.067 (1.7)	.02 $\pm$.01 (0.5 $\pm$ 0.25)

ordering information

New Part #	NPO	0805	H	T	TD	101	K
	Dielectric	Size	Voltage	Termination Material	Packaging	Capacitance	Tolerance
	NPO X5R X7R Y5V Z5U	0402 0603 0805 1206 1210	A = 10V C = 16V E = 25V H = 50V I = 100V J = 200V K = 6.3V	T: Sn	TP: 7" 2mm pitch (0402 only) TD: 7" paper tape TE: 7" embossed plastic TDB: 13" paper tape TEB: 13" embossed plastic	NPO, X5R, X7R, Y5V: 2 significant digits + no. of zeros. "R" indicates decimal point Z5U: 2 significant digits + no. of zeros	B: $\pm$ 0.1pF C: $\pm$ 0.25pF D: $\pm$ 0.5pF F: $\pm$ 1% G: $\pm$ 2% J: $\pm$ 5% K: $\pm$ 10% M: $\pm$ 20% Z: +80, -20%

For further information on packaging,
please refer to Appendix B.


applications and ratings

Dielectric	Capacitance Range	Capacitance Tolerance*	Voltage Ratings	Dissipation Factor	T.C.C.	Test Voltage	Operating Temperature	Insulation Resistance
NPO	0.47pF - 0.010μF	.47pF~8.2pF= C:±0.25pF 5.6pF~8.2pF= D±0.5pF 10pF~ 10000pF= F:±1%, G:±2%,J:±5%	16V 25V 50V 100V 200V	For Values >30pF: 0.1% max., ≤30pF: Q = 400 + 20 x C DF = 1/Q C is in pF	0 ± 30 ppm/°C	1.0 ± 0.2 Vrms	-55°C to +125°C	+25°C 100,000MΩ min. or 1000 MΩ - μF min. whichever is less
X5R	0.068μF - 22μF	K: ±10%	6.3V 10V	6.3 = 7.3% 10 = 5.0%	±15% (0 VDC)	1.0 ± 0.2 Vrms	-55°C to +85°C	+25°C 100,000MΩ min. or 500 MΩ - μF min. whichever is less
X7R	100pF - 4.7μF	K: ±10%	10V 16V 25V 50V 100V 200V	For 50 & 100 volts 2.5% max. 25 = 3.0% 16 = 3.5%	±15% (0 VDC)	1.0 ± 0.2 Vrms	-55°C to +125°C	+25°C 100,000MΩ min. or 1000 MΩ - μF min. whichever is less
Y5V	10000pF - 22μF	Z: +80, -20%	10V 16V 25V 50V	16V & 25V = 7.0% 50V = 5.0%	+22% to -82% max.	1.0 ± 0.2 Vrms	-30°C to +85°C	+25°C 10,000MΩ min. or 1000 MΩ - μF min. whichever is less
Z5U	10000pF - 1.0μF	Z: +80, -20%	25V 50V	4.0% max.	+22% to -56% max.	0.5 ± 0.2 Vrms	+10°C to +85°C	+25°C 10,000MΩ min. or 1000 MΩ - μF min. whichever is less


* Special tolerances available, please consult factory.

environmental applications


Insulation Resistance vs Temp.

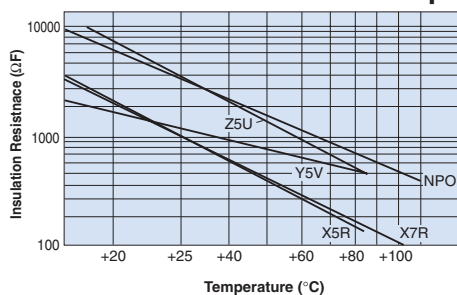


NPO - Temperature Coefficient

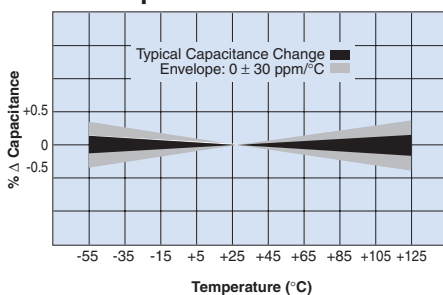


X5R - Temperature Coefficient

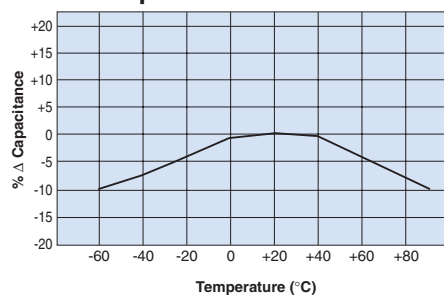


X7R - Temperature Coefficient

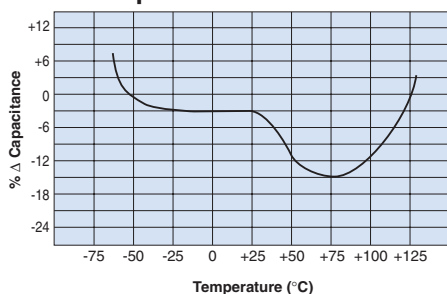

Y5V - Temperature Coefficient

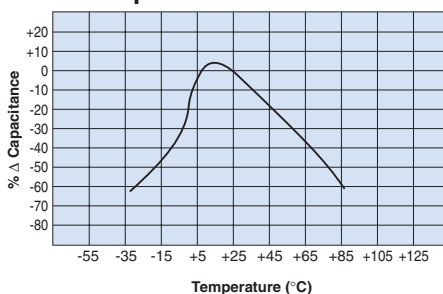

Z5U - Temperature Coefficient

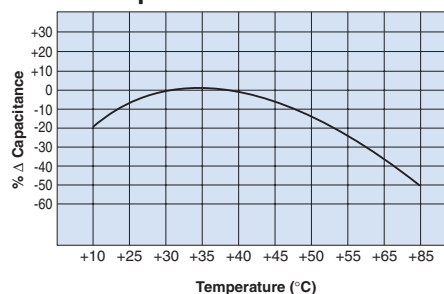

NPO capacitance voltage availability

Size				0402*			0603*		0805			1206			1210	
Capacitance pF	Capacitance μF	Cap. Code	WVDC	16 (C)	25 (E)	50 (H)	50 (H)	100 (I)	50 (H)	100 (I)	200 (J)	50 (H)	100 (I)	200 (J)	50 (H)	200 (J)
0.47		R47														
0.56		R56														
0.68		R68														
0.82		R82														
1		1R0														
1.2		1R2														
1.5		1R5														
1.8		1R8														
2.2		2R2														
2.7		2R7														
3.3		3R3														
3.9		3R9														
4.7		4R7														
5.6		5R6														
6.8		6R8														
8.2		8R2														
10		100														
12		120														
15		150														
18		180														
22		220														
27		270														
33		330														
39		390														
47		470														
56		560														
68		680														
82		820														
100	.0001	101														
120	.00012	121														
150	.00015	151														
180	.00018	181														
220	.00022	221														
270	.00027	271														
330	.00033	331														
390	.00039	391														
470	.00047	471														
560	.00056	561														
680	.00068	681														
820	.00082	821														
1000	.0010	102														
1200	.0012	122														
1500	.0015	152														
1800	.0018	182														
2200	.0022	222														
2700	.0027	272														
3300	.0033	332														
3900	.0039	392														
4700	.0047	472														
5600	.0056	562														
6800	.0068	682														
8200	.0082	822														
10000	.010	103														
12000	.012	123														
15000	.015	153														
18000	.018	183														
22000	.022	223														
27000	.027	273														
33000	.033	333														
39000	.039	393														

* IR and vapor phase solder only recommended

Capacitance tolerance available:

.47pF~8.2pF = C: ±0.25pF

5.6pF~8.2pF = D: ±0.5pF

10pF~10000pF = F: ±1%, G: ±2%, J: ±5%

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

1/11/06

X5R capacitance voltage availability

Size	0402			0603				0805				1206				1210	
Capacitance values pF μF	6.3 (K)	10 (A)	16 (C)	6.3 (K)	10 (A)	16 (C)	25 (E)	6.3 (K)	10 (A)	16 (C)	25 (E)	6.3 (K)	10 (A)	16 (C)	25 (E)	6.3 (K)	10 (A)
100																	
150																	
220																	
330																	
470																	
680																	
1000																	
1200																	
1500																	
1800																	
2200																	
2700																	
3300																	
3900																	
4700																	
5600																	
6800																	
8200																	
0.010																	
0.012																	
0.015																	
0.018																	
0.022																	
0.027																	
0.033																	
0.039																	
0.047																	
0.056																	
0.068																	
0.082																	
0.10																	
0.12																	
0.15																	
0.18																	
0.22																	
0.27																	
0.33																	
0.47																	
0.56																	
0.68																	
0.82																	
1.0																	
1.2																	
1.5																	
1.8																	
2.2																	
3.3																	
4.7																	
6.8																	
10																	
22																	
47																	
100																	

Capacitance tolerance available: ±10%

X7R capacitance voltage availability

Size			0402*				0603*				0805						1206						1210		
Capacitance values			10	16	25	50	10	16	25	50	10	16	25	50	100	200	10	16	25	50	100	200	50	100	200
pF	μF	Cap. Code	(A)	(C)	(E)	(H)	(A)	(C)	(E)	(H)	(A)	(C)	(E)	(H)	(I)	(J)	(A)	(C)	(E)	(H)	(I)	(J)	(H)	(I)	(J)
100	.0001	101																							
120	.00012	121																							
150	.00015	151																							
180	.00018	181																							
220	.00022	221																							
270	.00027	271																							
330	.00033	331																							
390	.00039	391																							
470	.00047	471																							
560	.00056	561																							
680	.00068	681																							
820	.00082	821																							
1000	.0010	102																							
1200	.0012	122																							
1500	.0015	152																							
1800	.0018	182																							
2200	.0022	222																							
2700	.0027	272																							
3300	.0033	332																							
3900	.0039	392																							
4700	.0047	472																							
5600	.0056	562																							
6800	.0068	682																							
8200	.0082	822																							
10000	.010	103																							
12000	.012	123																							
15000	.015	153																							
18000	.018	183																							
22000	.022	223																							
27000	.027	273																							
33000	.033	333																							
39000	.039	393																							
47000	.047	473																							
56000	.056	563																							
68000	.068	683																							
82000	.082	823																							
100000	.100	104																							
120000	.120	124																							
150000	.150	154																							
180000	.180	184																							
220000	.220	224																							
270000	.270	274																							
330000	.330	334																							
390000	.390	394																							
470000	.470	474																							
560000	.560	564																							
680000	.680	684																							
1000000	1.00	105																							
1200000	1.20	125																							
1500000	1.50	155																							
1800000	1.80	185																							
2200000	2.20	225																							
3900000	3.90	395																							
4700000	4.70	475																							

* IR and vapor phase solder only recommended

Capacitance tolerance available: ±10%

Y5V capacitance voltage availability

Size			0402*		0603*				0805				1206			
Capacitance values			10	16	10	16	25	50	10	16	25	50	10	16	25	50
pF	μF	Cap. Code	(A)	(C)	(A)	(C)	(E)	(H)	(A)	(C)	(E)	(H)	(A)	(C)	(E)	(H)
2200	.0022	222														
2700	.0027	272														
3300	.0033	332														
3900	.0039	392														
4700	.0047	472														
5600	.0056	562														
6800	.0068	682														
8200	.0082	822														
10000	.010	103														
12000	.012	123														
15000	.015	153														
18000	.018	183														
22000	.022	223														
27000	.027	273														
33000	.033	333														
39000	.039	393														
47000	.047	473														
56000	.056	563														
68000	.068	683														
82000	.082	823														
100000	.100	104														
120000	.120	124														
150000	.150	154														
180000	.180	184														
220000	.220	224														
270000	.270	274														
330000	.330	334														
390000	.390	394														
470000	.470	474														
560000	.560	564														
680000	.680	684														
820000	.820	824														
1000000	1.0	105														
1200000	1.2	125														
1500000	1.5	155														
1800000	1.8	185														
2200000	2.2	225														
2700000	2.7	275														
3300000	3.3	335														
3900000	3.9	395														
4700000	4.7	475														
5600000	5.6	565														
6800000	6.8	685														
10000000	10	106														
22000000	22	226														

* IR and vapor phase solder only recommended

Capacitance tolerance available: +80, -20%

Z5U capacitance voltage availability

Size			0603*	0805	1206	1210
Capacitance values			25	50	50	50
pF	μF	Cap. Code	(E)	(H)	(H)	(H)
2200	.0022	222				
2700	.0027	272				
3300	.0033	332				
3900	.0039	392				
4700	.0047	472				
5600	.0056	562				
6800	.0068	682				
8200	.0082	822				
10000	.010	103				
12000	.012	123				
15000	.015	153				
18000	.018	183				
22000	.022	223				
27000	.027	273				
33000	.033	333				
39000	.039	393				
47000	.047	473				
56000	.056	563				
68000	.068	683				
82000	.082	823				
100000	.100	104				
120000	.120	124				
150000	.150	154				
180000	.180	184				
220000	.220	224				
270000	.270	274				
330000	.330	334				
390000	.390	394				
470000	.470	474				
560000	.560	564				
680000	.680	684				
820000	.820	824				
1000000	1.0	105				
1500000	1.5	155				

* IR and vapor phase solder only recommended

Capacitance tolerance: +80, -20%