
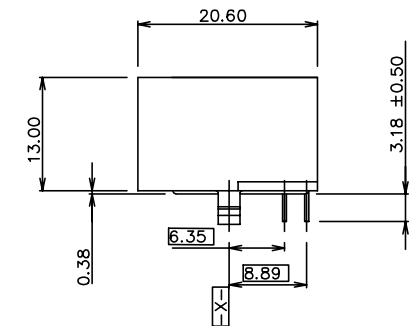
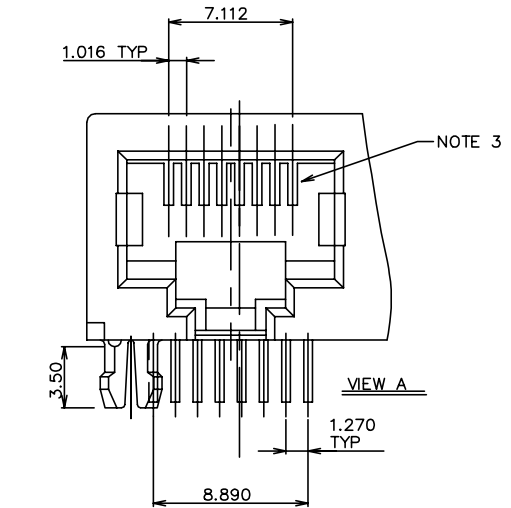


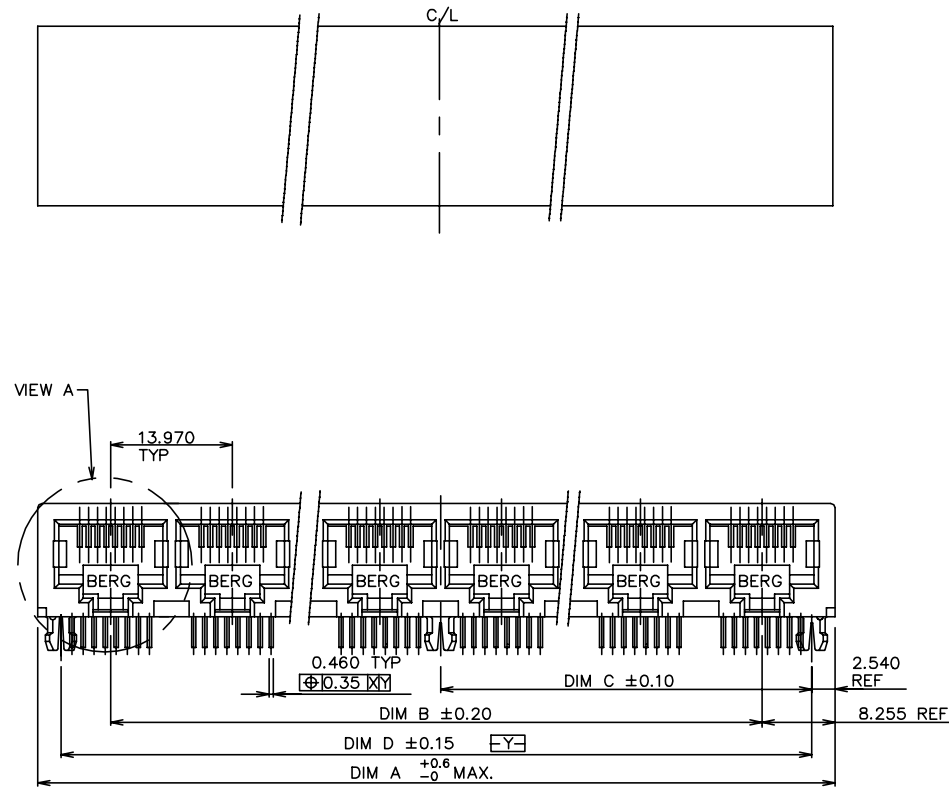


mat'l. code				surface		tolerance		projection		product family	
ISO 1301				ISO 406		ISO 1101		mm		MOD JACK	
tolerances unless otherwise specified				angle		0° ± 2'		scale 1.0		R/A CAT5 GANG JACK ASSY	
E M04-0174 MTH 8/17/04				F M04-0187 MTH 10/06/04		G M05-0067 MTH 4/8/05		H N06-0036 DT 2/9/06		J ELX-N-007928 SH 2011-11-18	
K ELX-N-011015 SH 03/27/12				dr L.POTTEIGER		eng Y.BELOPOLSKY		chr Y.BELOPOLSKY		app Y.BELOPOLSKY	
sheet index				revision		K K		dwg no		sheet 1 of 2	
1 2				8/30/95		8/30/95		8/30/95		8/30/95	
type				Product		Customer		Drawing		size	
A4				95679		FCI		type		size	

PRODUCT No.	PORTS No	DIM A ^{+0.60} _{-0.00}	DIM B ±0.20	DIM C ±0.10	DIM D ±0.15	COMMENT
95679-X01/X01LF	1	15.24	-----	5.715	11.43	
95679-X02/X02LF	2	30.48	13.97	12.700	25.40	
95679-X03/X03LF	3	44.45	27.94	19.685	39.37	
95679-X04/X04LF	4	58.42	41.91	26.670	53.34	
95679-X05/X05LF	5	72.39	55.88	33.655	67.31	
95679-X06/X06LF	6	86.36	69.85	40.640	81.28	NOTE 4
95679-X06P/X06PLF						
95679-X07/X07LF	7	100.33	83.82	47.625	95.25	
95679-X08/X08LF	8	114.30	97.79	54.610	109.22	
95679-X09/X09LF	9	128.27	111.76	61.595	123.19	NO MOULD
95679-X10/X10LF	10	142.24	125.73	68.580	137.16	NO MOULD
95679-X11/X11LF	11	156.21	139.70	75.565	151.13	NO MOULD
95679-X12/X12LF	12	170.18	153.67	82.550	165.10	NO MOULD

NOTES:

1. APPLICABLE PC BOARD THICKNESS: 1.6 mm.
2. CONTACTS: PHOSPHOR BRONZE ALLOY UNS-C51000, Ø0.460 ROUND WIRE, PLATING SEE TABLE.
3. CENTER PEG FOR 8 PORT AND ABOVE.
- ④. OPTIONAL CENTER PEG IN PORT 6 (95679-X06PLF) WITH CENTER PEG (95679-X06LF) WITHOUT CENTER PEG
- ⑤. PART NUMBERS WITH LF IN THE END ARE LEAD FREE.
4. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008.
5. THE HOUSING TEMPERATURE WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 15 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.5 MM MINIMUM THICK CIRCUIT BOARD. SEE APPLICATION NOTES/PROCEDURES IF THEY ARE AVAILABLE.
- ⑥. PLATING OPTION:
MAY BE EITHER GOLD OR GXT PLATED AT MANUFACTURER'S OPTION.
7. PRODUCT SPECIFICATION GS-12-083
PACKAGING SPECIFICATION GS-14-361

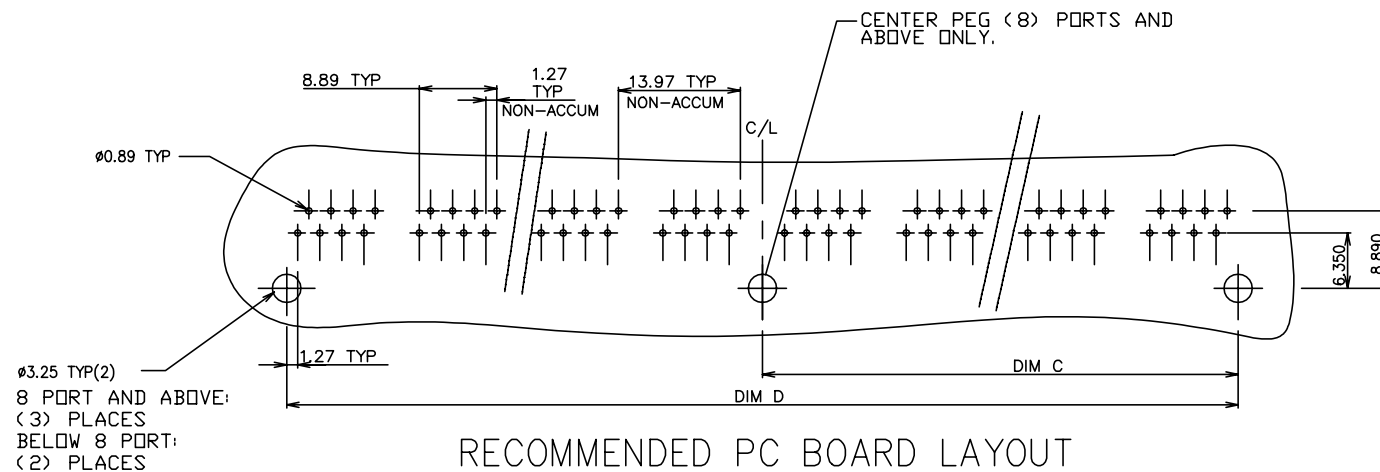

PLATING CODE X	PLATING ⑥
0	5u" Au + high performance lubricant
1	15u" GOLD.
2	15u" G.X.T.
3	5u" Au + high performance lubricant
5	50u" GXT.

mat'l. code	surface ISO 1301	tolerance ISO 406 ISO 1101	projection MM	product family MOD JACK
ltn ecn nodr date	tolerances unless otherwise specified	angle 0°±2'	scale 1.0	title R/A CAT5 GANG JACK ASSY 8 POS UNSHIELDED SNAP PEG
dr L.POTTEIGER	eng Y.BELOPOLSKY	chr Y.BELOPOLSKY	app Y.BELOPOLSKY	dwg no 95679
sheet index	revision sheet			type Product Customer Drawing