




Subject	Chip Resistor Array PRODUCT SPECIFICATION FOR INFORMATION	Spec. No. 151-EXB-28V02DE
Part No.	EXB28V	9-1


1. Dimension

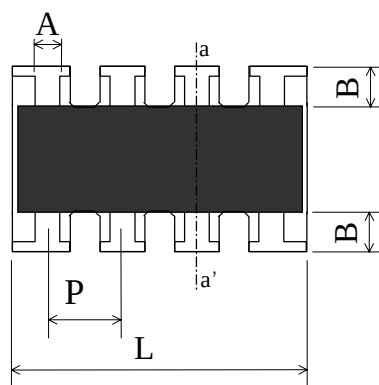

(1)Substrate	(2)Protective coating	(3)Resistive element
Alumina	Resin	Ruthenium oxide
(4)Termination (Inner)	(5)Termination (Between)	(6) Termination (Outer)
Ag or Ag/Pd Side:Resin+Metal	Ni Plating	Sn or Sn/ Pb Plating

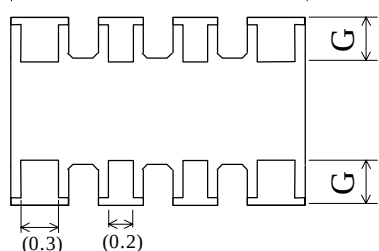


a-a' sectional plan



	L	W	T	A	B
Dimension(mm)	2.00±0.10	1.00±0.10	0.35±0.05	0.20±0.10	0.20±0.10

	P	G
Dimension(mm)	0.50±0.10	0.25±0.10

2. Power derating curve

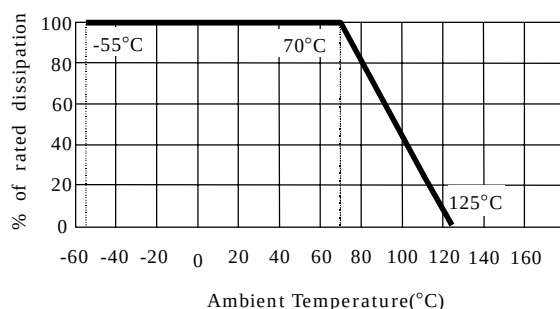

Category temperature range
-55°C to +125°C

Fig. 1


3. Ratings

Item	Rated Value	Explanation
Rated Dissipation	0.031 W / element	When used at ambient temperature over 70 °C, the rated dissipation should be reduced as shown in Fig.1
	Chip jumper : Rated current 1 A (Resistance is less than 50 mΩ)	
Rated voltage & Rated Continuous Working Voltage (RCWV)	The rated voltage of each resistor should be calculated from the equation below, and when the rated voltage exceeds the limiting element voltage, the limiting element voltage should be the maximum working voltage. $E = \sqrt{P \times R}$ Limiting element voltage : 50 V E: Rated voltage(V), P: Rated dissipation(W), R: Rated resistance(Ω)	

Subject	Chip Resistor Array PRODUCT SPECIFICATION FOR INFORMATION	Spec. No. 151-EXB-28V02DE
Part No.	EXB28V	9-2

Item	Rated Value	Explanation		
Maximum overload voltage	Voltage should be $2.5 \times E$. When the voltage exceeds the maximum overload voltage, the value shown below should be the maximum overload voltage. Maximum overload voltage: 100V Chip jumper: Max. overload current 2A			
Resistance tolerance		sign	Tolerance for resistance	
		J	$\pm 5\%$	
		0	Chip Jumper	
Range of rated resistance for manufacture		Tolerance	Resistance range	Series
		J	$1.0\ \Omega$ to $1.0\ M\Omega$	E-24

4. Explanation of part number

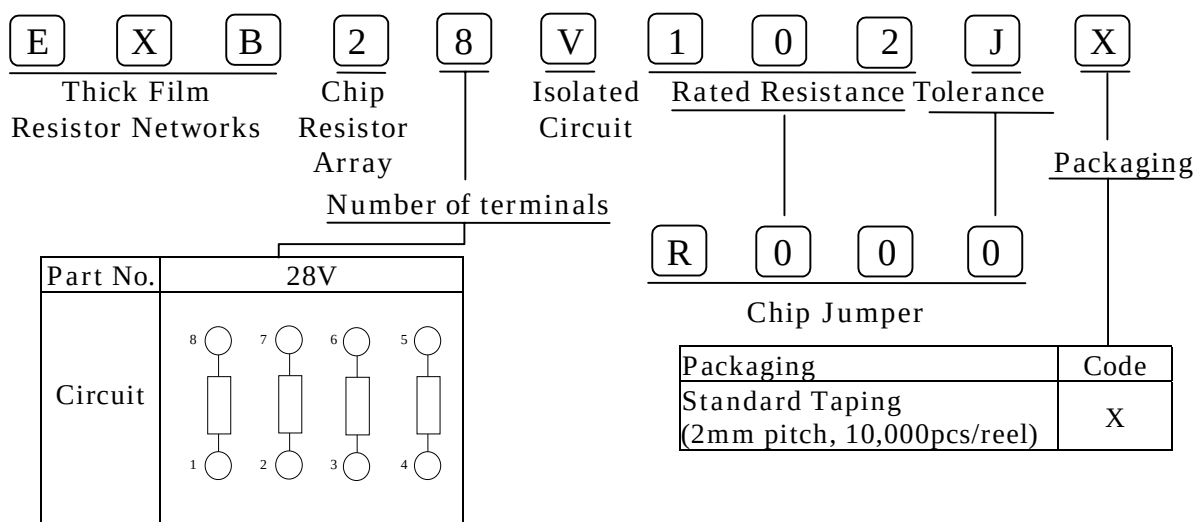

5. Appearance & Construction

Item	Specifications	Explanation
Appearance & Construction	- The resistive element should be covered with protective coating that do not fade easily. The surface of coating should avoid unevenness, flaw, pinhole and discoloration. - The electrode should be printed uniformly, as shown in the dimensions. The plating should not fade easily, and should avoid unevenness, flaw, pinhole, projection and discoloration. - The electrode should be connected electrically, mechanically to resistive element. - Substrate should not have chipping, flaw, flash and crack. Details of appearance criteria shall be as described in attached sheet	

Subject	Chip Resistor Array PRODUCT SPECIFICATION FOR INFORMATION	Spec. No. 151-EXB-28V02DE
Part No.	EXB28V	9-3

As far as there shall be not designation especially, the following test and measurement shall be operated under normal temperature(5 °C to 35 °C), normal humidity(45 %RH to 85 %RH), normal atmospheric pressure(86 kPa to 106 kPa).

6. Performance Specification

Item	Specification		Test methods						
	Resistor	Jumper							
DC resistance	DC resistance value shall be within the specified tolerance		Measuring voltage: refer to JIS-C5201-1 At 20 °C, 65 %RH						
Temperature coefficient	<table><tr><th>Resistance</th><th>TCR</th></tr><tr><td>< 10Ω</td><td>$\begin{smallmatrix} +600 \\ -100 \end{smallmatrix} \times 10^{-6} / ^\circ\text{C}$</td></tr><tr><td>10Ω to 1MΩ</td><td>$\pm 200 \times 10^{-6} / ^\circ\text{C}$</td></tr></table>		Resistance	TCR	< 10Ω	$\begin{smallmatrix} +600 \\ -100 \end{smallmatrix} \times 10^{-6} / ^\circ\text{C}$	10Ω to 1MΩ	$\pm 200 \times 10^{-6} / ^\circ\text{C}$	Natural resistance change per temperature degree centigrade. $\text{TCR} = \frac{R_2 - R_1}{R_1 \times (t_2 - t_1)}$ R₁ : Resistance value at reference temperature(t₁) R₂ : Resistance value at test temperature(t₂) t₂ - t₁ = 100 °C, t₁ = 25 °C
	Resistance	TCR							
	< 10Ω	$\begin{smallmatrix} +600 \\ -100 \end{smallmatrix} \times 10^{-6} / ^\circ\text{C}$							
	10Ω to 1MΩ	$\pm 200 \times 10^{-6} / ^\circ\text{C}$							
Overload	±(2 % + 0.1 Ω)	Less than 50 mΩ	Resistors shall be applied 2.5 times the rated voltage for 5 seconds. Maximum over load voltage shall be 100 V.						
Intermittent overload	±(5 % + 0.1 Ω)	Less than 50 mΩ	Resistors shall be subjected to 10000 cycles of 2.5 times the rated voltage applied for 1 second with pause of 25 seconds between tests. Maximum over load voltage shall be 100 V						
Dielectric Withstanding	No evidence of flashover, mechanical damage, arcing or insulation breakdown.		AC 100V between substrate and termination for 1 minute.						
Insulation Resistance	Min. 1,000 MΩ		Insulation resistance between substrate and termination shall be measured at DC 100V.						

7. Mechanical characteristic

Item	Specification		Test methods
	Resistor	Jumper	
Terminal strength	min. 4.9N		Copper plate: $t=0.4\text{ mm}$ Pull speed: 10 mm/s
Bend strength of the face plating	No mechanical damage		Substrate: Glass epoxy($t = 1.6\text{ mm}$) Span: 90 mm
	$\pm(1\% + 0.05\text{ }\Omega)$	Less than 50 mΩ	Bending distance: 3 mm (10 seconds)
Solderability	Termination should be covered uniformly with solder. (min. 95 % coverage)		Resistors shall be dipped in the melted solder bath at $235\text{ }^\circ\text{C} \pm 5\text{ }^\circ\text{C}$ for $2\text{ s} \pm 0.5\text{ s}$. Flux shall be removed from the surface of termination with clean organic solvent.

Subject	Spec. No.
Chip Resistor Array PRODUCT SPECIFICATION FOR INFORMATION	151-EXB-28V02DE
Part No.	
EXB28V	9-4

Item	Specification		Test methods
	Resistor	Jumper	
Resistance to soldering heat	$\pm(1\%+0.05\ \Omega)$	Less than 50 m Ω	Resistors shall be dipped in the melted solder bath at 270 °C $\pm$ 5 °C for 10s $\pm$ 1s.
Vibration	$\pm(1\%+0.05\ \Omega)$	Less than 50 m Ω	Resistors shall be subjected to a single vibration having as double amplitude of 1.5 mm for 2 hours in each three mutually perpendicular directions for total 6 hours. The vibration frequency shall be varied uniformly 10 Hz to 55 Hz and return to 10 Hz traversing for 1 minute.
Solvent resistance	Without distinct deformation in appearance		Solvent solution: Isopropyl alcohol (1) Dipping 10 hours $\pm$ 1 hour, dry in room condition for 30 min $\pm$ 10 min.
	$\pm(0.5\%+0.05\ \Omega)$	Less than 50 m Ω	(2) Ultrasonic wave washing: 5 min $\pm$ 1 min (0.3 W/cm, 28 kHz) Dry in room condition for 30 min $\pm$ 10 min.

8. Environmental Test

Item	Specification		Test methods
	Resistor	Jumper	
Low temperature exposure	$\pm(1\%+0.05\ \Omega)$	Less than 50 m Ω	Resistors shall be exposed at -55 °C $\pm$ 3 °C for 1000 hours $^{+48}_0$ hours
Low temperature operating	$\pm(1\%+0.05\ \Omega)$	Less than 50 m Ω	Resistors shall be placed at -65 °C $\pm$ 5 °C for 1.5 hours. After applying RCWV for 45 minutes, resistors shall be exposed in room condition for 8 hours $\pm$ 1 hour.
Endurance at upper category temperature	$\pm(1\%+0.05\ \Omega)$	Less than 50 m Ω	Resistors shall be exposed at +125 °C $\pm$ 3 °C for 1000 hours $^{+48}_0$ hours.
Temperature cycling	$\pm(1\%+0.05\ \Omega)$	Less than 50 m Ω	-55 °C $\pm$ 3 °C, 30 minutes ↑↓ Nominal temp., 30 minutes 25 cycles ↑↓ +125 °C $\pm$ 3 °C, 30 minutes
Humidity (Steady state)	$\pm(1\%+0.05\ \Omega)$	Less than 50 m Ω	Resistors shall be exposed at 60 °C $\pm$ 2 °C and 90 % to 95 % relative humidity in a humidity test chamber for 1000 hours $^{+48}_0$ hours.
Salt spray	$\pm(1\%+0.05\ \Omega)$	Less than 50 m Ω	Spray 5 wt% $\pm$ 1 wt% salt water for 96 hours $\pm$ 4 hours at 35 °C $\pm$ 2 °C
Endurance at 70 °C	$\pm(3\%+0.1\ \Omega)$	Less than 50 m Ω	Resistors shall be exposed at 70 °C $\pm$ 2 °C for 1000 hours $^{+48}_0$ hours. During this time, the rated voltage shall be applied intermittently for 1.5 hours ON, 0.5 hour OFF.
Load life in Humidity	$\pm(3\%+0.1\ \Omega)$	Less than 50 m Ω	Resistor shall be exposed at 60 °C $\pm$ 2 °C and 90 % to 95 % relative humidity for 1000 hours $^{+48}_0$ hours. During this time, the rated voltage shall be applied intermittently for 1.5 hours ON, 0.5 hour OFF.

Subject	Spec. No.
Chip Resistor Array PRODUCT SPECIFICATION FOR INFORMATION	151-EXB-28V02DE
Part No.	
EXB28V	9-5

9. Other characteristics

Item	Specification	Test methods
Surface temperature rise	Less than 30 °C	Resistor shall be mounted on glass epoxy substrate (t = 1.0 mm). A power of 0.031 W / element shall be applied. The temperature rise at the center of resistor is measured. However, applied voltage must not exceed max. overload voltage.

10. Resistance value marking

No marking.

Subject	Spec. No.
Chip Resistor Array PRODUCT SPECIFICATION FOR INFORMATION	151-EXB-28V02DE
Part No.	
EXB28V	9-6

11. Notice for use



Notice for use

- (1) This specification shows the quality and performance of the product in a unit component. Before adoption, be sure to evaluate and verify the product mounting it in your product.
- (2) We take no responsibility for troubles caused by the product usage that is not specified in this specification.
- (3) In traffic transportation equipment (trains, cars, traffic signal equipment, etc.), medical equipment, aerospace equipment, electric heating appliances, combustion and gas equipment, rotating equipment, disaster and crime preventive equipment, etc. in cases where it is forecast that the failure of this product gives serious damage to human life and others, use fail-safe design and ensure safety by studying the following items to
 - ◆ Ensure safety as the system by setting protective circuits and protective equipment.
 - ◆ Ensure safety as the system by setting such redundant circuits as do not cause danger by a single failure.
- (4) When a dogma shall be occurred about safety for this product, be sure to inform us rapidly, operate your technical examination.
- (5) The products in this specification are tended for use in general standard applications for general electric equipment (AV products, household electric appliances, office equipment, information and communication equipment, etc.); hence, they do not take the use under the following special environments into consideration.
Accordingly, the use in the following special environments, and such environmental conditions may affect the performance of the products; prior to use, verify the performance, reliability, etc. thoroughly.
 - 1) Use in liquids such as water, oil, chemical and organic solvent.
 - 2) Use under direct sunlight or in outdoor or dusty atmospheres
 - 3) Use in places full of corrosive gases such as sea breeze, Cl₂, H₂S, NH₃, SO₂, and NO_x
 - 4) Use in environment with large static electricity or strong electromagnetic waves.
 - 5) Where the product is close to a heating component, or where an inflammable such as a polyvinyl chloride wire is arranged close to the product.
 - 6) Where the resistor is sealed or coated with resin, etc.
 - 7) Where water or a water-soluble detergent is used in flux cleaning after soldering (pay particular attention to water-soluble flux.)
- (6) If transient load (heavy load on a short time) like pulse is expected to be applied, carry out evaluation and confirmation test with resistors actually mounted on your own board. When the load of more than rated power is applied under the load condition at steady state, it may impair performance and/or reliability of resistor. Never exceed the rated power.
When the product shall be used under special condition, be sure to ask us in advance.
- (7) Halogen type (chlorine type, bromine type, etc.) or other high-activity flux is not recommended as the residue may affect performance or reliability of resistors.
- (8) When soldering with soldering iron, never touch the body of the chip resistor with a tip of the soldering iron. When using a soldering iron with a tip at high temperature, solder for a time as short as possible. (Three seconds or less up to 350 °C)
- (9) Avoid physical shock to the resistor and nipping of the resistor with hard tool (a pair of pliers or tweezers) as it may damage protective film or the body of resistor and may affect resistor's performance.
- (10) Reflow soldering method shall apply to this product in principle.

Subject	Spec. No.
Chip Resistor Array PRODUCT SPECIFICATION FOR INFORMATION	151-EXB-28V02DE
Part No.	
EXB28V	9-7

12. Storage method

If the product is stored in the following environments and conditions, the performance and solderability may be badly affected. Avoid the storage in the following environments.

- (1) Storage in places full of corrosive gases such as sea breeze, Cl₂, H₂S, NH₃, SO₂, and NO_x
- (2) Storage in places exposed to direct sunlight
- (3) Storage in places outside the temperature range of 5 °C to 35 °C and humidity range of 45 %RH to 85 %RH
- (4) Storage over a year after our delivery (This item also applies to the case where the storage method specified in item (1) to (3) has been followed.)

13. Low and regulation

- (1) No ODCs or other ozone-depleting substances that are subject to regulation under the Montreal Protocol are used in our manufacturing processes, including in the manufacture of this product.
- (2) All materials used in this product are existing chemical substances recognized under "laws on examination of chemical substances and regulations of manufacturing and others."
- (3) None of the materials used in this product contain the designated incombustible bromic substances, PBBOs and PBBs.
- (4) Please contact us to obtain a notice as to whether this product has passed inspection under review criteria primarily based on Foreign Exchange and Foreign Trade Control Laws, and appended table in the Export Control Laws.

14. Period of validity for specification

If there is not an offer by letter by 3 months before term of validity, term of validity shall be extended every one year.

When you confirm revision of this specification while it is in effect, the previous, unrevised version shall lose its validity.

15. Production Place

Production Country :Japan

Production Plant :Fukui matsushita Electronic Components Co.,Ltd..

Production Country :China

Production Plant :Tianjin matsushita Electronic Components co.,Ltd.<TMCOM>

Production Country :Malaysia

Production Plant :Matsushita Electronic Devices (M)Sdn.Bhd.<MEDEM>


Subject	Chip Resistor Array PRODUCT SPECIFICATION FOR INFORMATION	Spec. No.
		151-EXB-28V02DE
Part No.	EXB28V	9-8

1. Application Range


This specification covers taping specification of EXB28V Type.

2. Physical Dimensions

2-1. Structure and reel dimensions shall be as shown in the figure below.

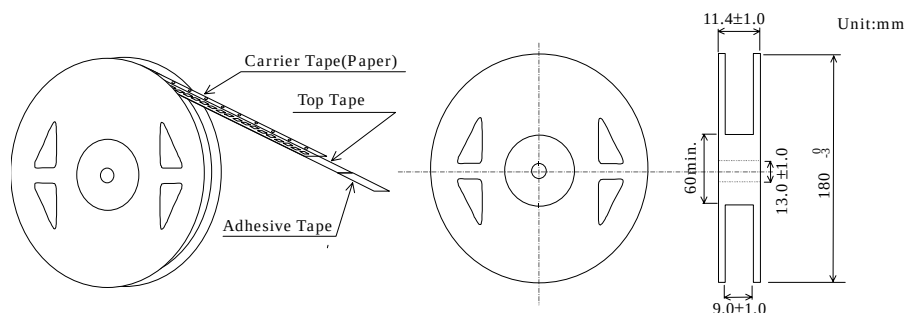

2-2. Carrier Tape Dimensions

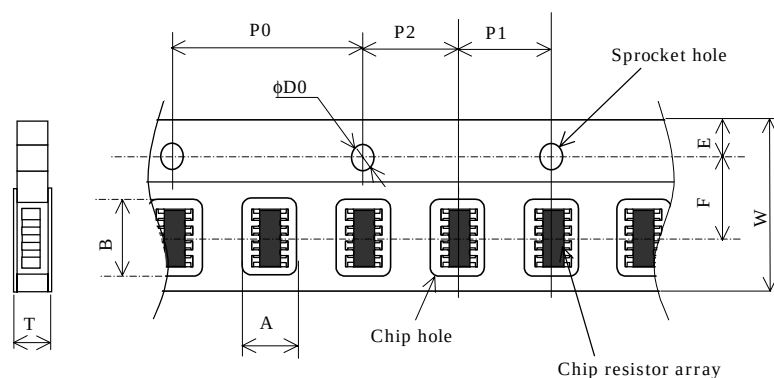

	A	B	W	F	E
(mm)	1.20±0.05	2.20±0.10	8.00±0.20	3.50±0.05	1.75±0.10


	P1	P2	P0	T	φD0
(mm)	2.00±0.10	2.00±0.05	4.00±0.10	0.52±0.05	1.50 ^{+0.10} ₀

3. Specification

3-1.Taping

When the test shall be operated with the below conditions, peel strength should be 0.049N to 0.49N, should not have flash and tear after peeling.

<Test Method>



•Minimum Bending Radius

When carrier tape shall be bent by minimum bending radius (15 mm), no defection of chip and no break of carrier tape. However minimum bending radius shall be tested for 1 times.

Subject	Spec. No.
Chip Resistor Array PRODUCT SPECIFICATION FOR INFORMATION	151-EXB-28V02DE
Part No.	
EXB28V	9-9

•Resistance to climate

When resistors shall be exposed at $60\text{ }^{\circ}\text{C} \pm 2\text{ }^{\circ}\text{C}$, 90 %RH to 95 %RH for 120 hours, no defection of chip and no break off carrier tape.

When the top tape shall be peeled, tape should not have flash and tear.


3-2. Quantity in Taping: 10,000 pcs. / reel

3-3. Tape packaging

- Resistor side shall be facing upward.
- Chip resistor shall not be sticking to top tape and bottom tape.
- Chip resistors shall be easy to take out from carrier tape and chip hole or sprocket hole shall not have flash and break.

4. Outer Packaging





Quantity: 20reels(Max.200,000 pcs.)

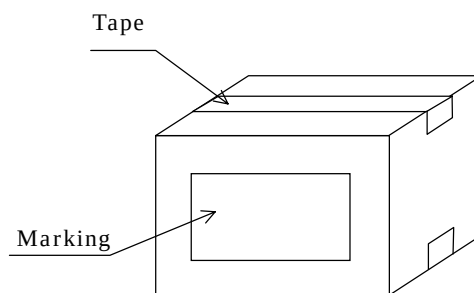

- When packaging quantity does not reach max quantity, the remaining empty space shall be buried with buffer material.
- When quantity shall be few, alternative packaging methods may used. No problem must occur during the exportation of the product..

5. Marking

- Side of reel(Marking shall be on one side.)
 - (1)Part name
 - (2)Part number
 - (3)Quantity
 - (4)Lot number
 - (5)Maker name
- Packaging box
 - (1)Customer name
 - (2)Part name
 - (3)Part number
 - (4)Customer part number
 - (5)Quantity
 - (6)Maker name

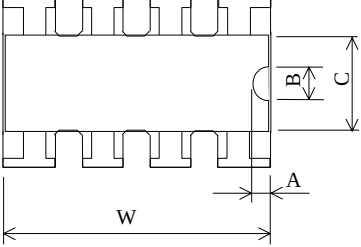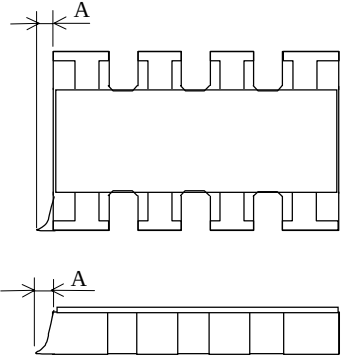Subject Chip Resistor Array PRODUCT SPECIFICATION FOR INFORMATION			Spec. No. Attached Sheet
APPEARANCE QUALITY CRITERIA			1-1
Item	Defect Criteria	Appearance Criteria	Remark
Resin Chipping		$A \leq W/16$ $B \leq C/2$	Both side chipping shall be judged defect
Terminal Chipping	 ※ Oblique line show chipping	$A \leq C/4$ $B \leq \text{Top terminal width}$ $D \geq 3C/4$	
Pin Hole		One pin hole / chip resistor $\phi \leq 0.2 \text{ mm}$	This item is applied to pin holes which reach to the resistive materials
Flash		$A \leq 100 \mu\text{m}$	