

RoHS  **215 Series, 5 x 20 mm, Time-Lag (Slo-Blo®) Fuse**



Description

5x20mm Time-Lag surge withstand ceramic body cartridge fuse designed to IEC specification

Features

- Designed to International (IEC) Standards for use globally
- High breaking capacity
- Meet the IEC 60127-2, Sheet 5 specification for Time-Lag fuses
- RoHS compliant and lead-free

Applications

Used as supplementary protection in appliance or utilization equipment to provide individual protection for components or internal circuits.

Agency Approvals

Agency	Agency File Number	Ampere Range
	Cartridge Certificates: NBK080205-E10480A NBK250702-E10480E NBK100408-JP1021A	1A – 5A 6.3A – 15A 16A – 20A
	Leaded Certificates: NBK080205-E10480B NBK250702-E10480F NBK100408-JP1021B	1A – 5A 6.3A – 15A 16A – 20A
	Certificates: 2005010207145714	1A – 6.3A
	Certificates: SU05001– 2011 SU05001– 2012	1A – 3.15A 4A – 10A
	Recognised File: E10480	125mA – 160mA 500mA – 20A
	File: 029862 Acc. Class: LR1422 – 30	500mA – 12A
	License: KM41462	200mA – 10A
	License: 606726 902193 915511 0147100 709071 709302	125mA, 160mA 200mA – 800mA, 8A, 10A 1A – 3.15A 4A – 6.3A 12A *15A – *20A
	License: 40013521	200mA – 8A *10A
	License: 40016610	*12A
		125mA – 20A

* Approved for cartridge versions only

Electrical Characteristics for Series

% of Ampere Rating	Ampere Rating	Opening Time
150%	125mA – 800mA	60 minutes, Minimum
	1A – 3.15A	60 minutes, Minimum
	4A – 6.3A	60 minutes, Minimum
	8A – 20A	30 minutes, Minimum
210%	125mA – 800mA	30 minutes, Maximum
	1A – 3.15A	30 minutes, Maximum
	4A – 6.3A	30 minutes, Maximum
	8A – 12A	30 minutes, Maximum
275%	125mA – 800mA	.25 sec. Min.; 80 secs. Max.
	1A – 3.15A	.75 sec. Min.; 80 secs. Max.
	4A – 6.3A	.75 sec. Min.; 80 secs. Max.
	8A – 20A	.75 sec. Min.; 80 secs. Max.
400%	125mA – 800mA	.05 sec., Min.; 5 secs. Max.
	1A – 3.15A	.095 sec., Min.; 5 secs. Max.
	4A – 6.3A	.150 sec., Min.; 5 secs. Max.
	8A – 20A	.150 sec., Min.; 5 secs. Max.
1000%	125mA – 800mA	.005 sec., Min.; .150 sec. Max.
	1A – 3.15A	.010 sec., Min.; .150 sec. Max.
	4A – 6.3A	.010 sec., Min.; .150 sec. Max.
	8A – 20A	.010 sec., Min.; .150 sec. Max.

215 Series

Electrical Characteristic Specifications by Item


Amp Code	Amp Rating	Voltage Rating (V)	Interrupting Rating	Nominal Cold Resistance (Ohms)	Nominal Melting I ² t (A ² sec)	Maximum Voltage Drop at Rated Current (mV)	Maximum Power Dissipation at Rated Current (W)	Agency Approvals									
								PS E	CCC	UL	UL	UL	UL	UL	UL	UL	UL
.125	0.125	250	1500 A @ 250 VAC	11.4455	0.0330	2600	1.6					x			x		x
.160	0.16	250		7.1000	0.0465	2400	1.6					x			x		x
.200	0.2	250		1.8400	0.340	2100	1.6							x	x	x	x
.250	0.25	250		1.2400	0.545	1500	1.6							x	x	x	x
.315	0.315	250		0.8800	0.975	1100	1.6							x	x	x	x
.400	0.4	250		0.5825	1.325	1000	1.6							x	x	x	x
.500	0.5	250		1.1675	0.420	850	1.6					x	x	x	x	x	x
.630	0.63	250		0.7200	0.635	650	1.6					x	x	x	x	x	x
.800	0.8	250		0.4675	0.975	500	1.6					x	x	x	x	x	x
001.	1	250		0.1515	1.520	350	2.5	x	x	x	x	x	x	x	x	x	x
1.25	1.25	250		0.1074	3.200	300	2.5	x	x	x	x	x	x	x	x	x	x
01.6	1.6	250		0.0707	6.830	200	2.5	x	x	x	x	x	x	x	x	x	x
002.	2	250		0.0566	11.680	190	2.5	x	x	x	x	x	x	x	x	x	x
02.5	2.5	250		0.0386	22.290	180	2.5	x	x	x	x	x	x	x	x	x	x
3.15	3.15	250		0.0283	43.255	140	4	x	x	x	x	x	x	x	x	x	x
004.	4	250		0.0185	46.960	100	4	x	x	x	x	x	x	x	x	x	x
005.	5	250		0.0153	66.095	100	4	x	x	x	x	x	x	x	x	x	x
06.3	6.3	250		0.0108	128.750	100	4	x	x	x	x	x	x	x	x	x	x
008.	8	250		0.0092	209.880	100	4	x		x	x	x	x	x	x	x	x
010.	10	250		0.0066	333.565	100	4	x		x	x	x	x	x	x	x	x
012.	12	250		0.0061	515.500	100	4	x			x	x		x		x	x
015.	15	250	500 A	0.0033	1237.0	TBA**	TBA**	x			x			x			
016.	16	250		0.0031	1408.0	TBA**	TBA**	x			x			x			
020.	20	250	400 A	0.0023	2600.0	TBA**	TBA**	x			x			x			

X* Approval for cartridge versions only

TBA** - Please contact Littelfuse for details on these parameters


1A to 2A have an IR : 100A@500VAC, 4A to 6-3A have the IR : 100A@305 VAC and 1000A@72VDC

Temperature Derating Curve

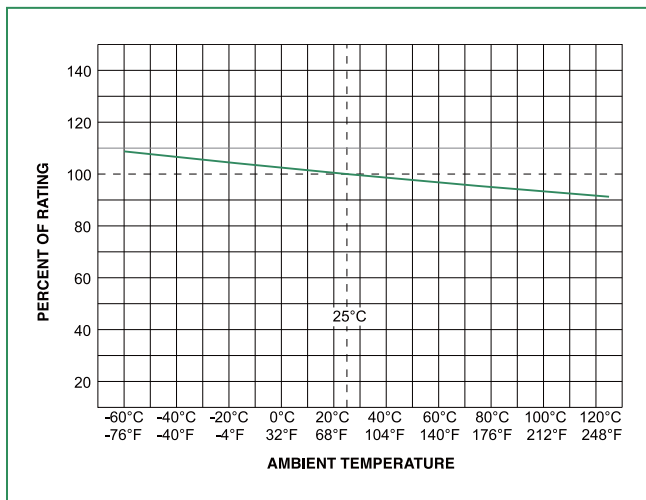


Average Time Current Curves


T-C Curves for 125mA to 800mA only

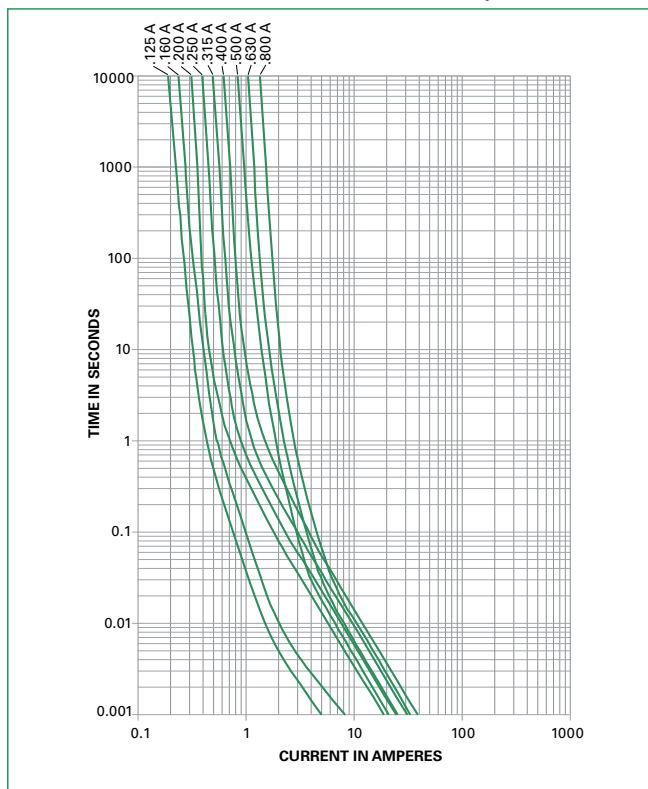

T-C Curves for 1A to 20A only

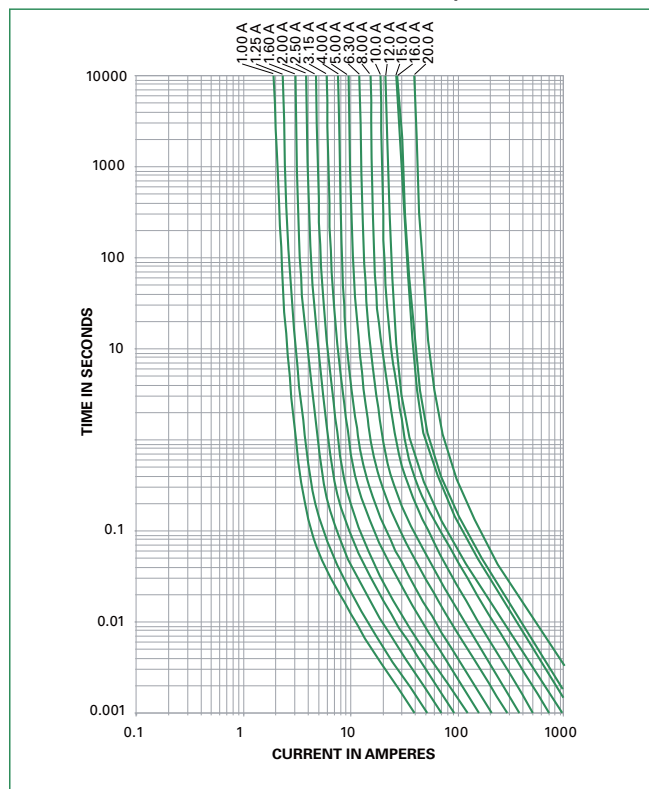

Soldering Parameters - Wave Soldering

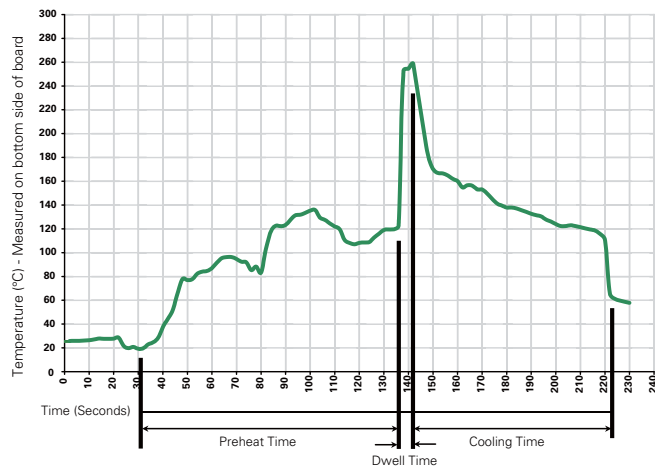

Recommended Process Parameters:

Wave Parameter	Lead-Free Recommendation
Preheat:	
(Depends on Flux Activation Temperature)	(Typical Industry Recommendation)
Temperature Minimum:	100° C
Temperature Maximum:	150° C
Preheat Time:	60-180 seconds
Solder Pot Temperature:	260° C Maximum
Solder Dwell Time:	2-5 seconds

Recommended Hand-Solder Parameters:

Solder Iron Temperature: 350° C +/- 5°C
Heating Time: 5 seconds max.


Note: These devices are not recommended for IR or Convection Reflow process.

Product Characteristics

Materials	Body: Ceramic Cap: Nickel-plated Brass Leads: Tin-plated Copper
Terminal Strength	MIL-STD-202G, Method 211A, Test Condition A
Solderability	Reference IEC 60127 Second Edition 2003-01 Annex A
Product Marking	Cap 1: Brand logo, current and voltage ratings Cap 2: Agency approval markings


Operating Temperature	–55°C to +125°C
Thermal Shock	MIL-STD-202G, Method 107G, Test Condition B (5 cycles, –65°C to +125°C)
Vibration	MIL-STD-202G, Method 201A
Humidity	MIL-STD-202G, Method 103B, Test Condition A (High RH (95%) and elevated temp (40°C) for 240 hours)
Salt Spray	MIL-STD-202G, Method 101D, Test Condition B

Dimensions

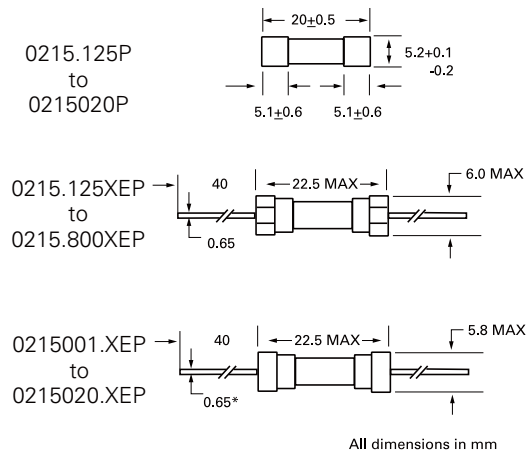

* Ratings above 6.3 A have 0.8 mm diameter lead;
ratings above 12 A have 1.2 mm diameter lead

Part Numbering System

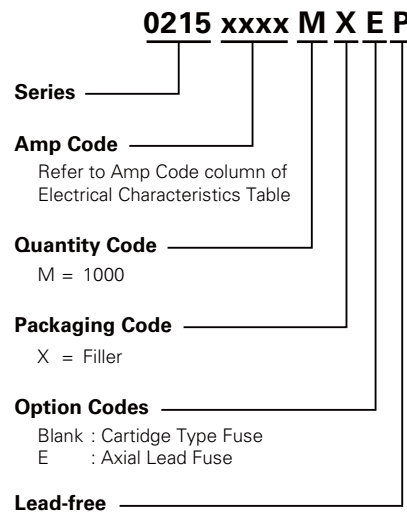

Packaging

Packaging Option	Packaging Specification	Quantity	Quantity & Packaging Code	Taping Width
215 Series				
Bulk	N/A	1000	MX	N/A
Bulk	N/A	1000	MXE	N/A
Reel and Tape	N/A	1000	MRET1	T1=52mm (2.062")
Bulk	N/A	1000	MXG	N/A
Bulk	N/A	1000	MXB	N/A
Bulk	N/A	100	HX	N/A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Littelfuse:

[02400106P](#) [0215020.MXEP](#) [0215015.MXP](#) [0215016.MXP](#) [0215020.MXP](#) [0215025.MXP](#) [0215015.MXEP](#)
[0215016.MXEP](#) [0215.800TXP](#) [0215008.TXP](#) [0215.630TXP](#) [0215.315MRGT1P](#) [0215.400MXBP](#) [0215010.MRET5P](#)
[0215015.MXK8P](#) [0215010.MXF11P](#) [0215012.MRGT1P](#) [0215.400MXGP](#) [0215010.MXF3P](#) [0215015.MRET1P](#)
[0215.250MRGT1P](#) [0215.400TXP](#) [0215.630MXBP](#) [0215008.MXK5P](#) [0215012.MXF41P](#) [0215012.MRET1P](#)
[0215010.MRGT1P](#) [0215020.MRET1P](#) [0215012.MXF46P](#) [0215.200MRET1P](#) [0215008.MRET1P](#) [0215008.MXF11P](#)
[0215.250MXGP](#) [0215.315TXP](#) [0215008.MXK9SPP](#) [0215008.MRGT1P](#) [0215.315MXBP](#) [0215008.MXF103SPP](#)
[0215008.MXB940P](#) [0215010.MXF38P](#) [0215008.MXF20P](#) [0215.160MRGT1P](#) [0215008.MXGP](#) [0215.250MXBP](#)
[0215.125MRGT1P](#) [0215008.MXF13P](#) [0215012.TXP](#) [0215010.MXK10SPP](#) [0215012.MXBP](#) [0215008.MXBP](#)
[0215012.MXF11P](#) [0215.200TXP](#) [0215.250TXP](#) [0215.160MRET1P](#) [0215010.MXGP](#) [0215012.MXK20P](#)
[0215.800MXBP](#) [0215.315MXGP](#) [0215016.MRET1P](#) [0215.500MXBP](#) [0215010.MXBP](#) [0215012.MXGP](#)
[0215010.MXF4P](#) [0215.200MXBP](#) [0215.800MXF34P](#) [0215.125MXBP](#) [0215008.MXF3P](#)