

## CD4528BC

### Dual Monostable Multivibrator

#### General Description

The CD4528B is a dual monostable multivibrator. Each device is retriggerable and resettable. Triggering can occur from either the rising or falling edge of an input pulse, resulting in an output pulse over a wide range of widths. Pulse duration and accuracy are determined by external timing components Rx and Cx.

#### Features

- Wide supply voltage range: 3.0V to 18V
- Separate reset available
- Quiescent current = 5.0 nA/package (typ.) at 5.0 V<sub>DC</sub>
- Diode protection on all inputs
- Triggerable from leading or trailing edge pulse
- Capable of driving two low-power TTL loads or one low-power Schottky TTL load over the rated temperature range


#### Ordering Code:

Order Number	Package Number	Package Description
CD4528BCM	M16A	16-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-012, 0.150" Narrow Body
CD4528BCN	N16E	16-Lead Plastic Dual-In-Line Package (PDIP), JEDEC MS-001, 0.300" Wide

Devices also available in Tape and Reel. Specify by appending the suffix letter "X" to the ordering code.

#### Connection Diagram

Pin Assignments for DIP and SOIC

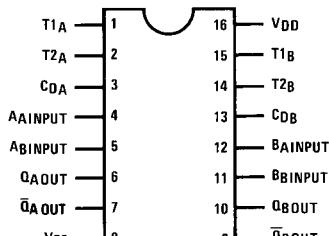


Top View

#### Truth Table


Clear	Inputs		Outputs	
	A	B	Q	Q
L	X	X	L	H
X	H	X	L	H
X	X	L	L	H
H	L	↓	↑	↑
H	↑	H	↑	↑

H = HIGH Level  
L = LOW Level  
↑ = Transition from LOW-to-HIGH  
↓ = Transition from HIGH-to-LOW  
↑ = One HIGH Level Pulse  
↓ = One LOW Level Pulse  
X = Irrelevant

## Block Diagram

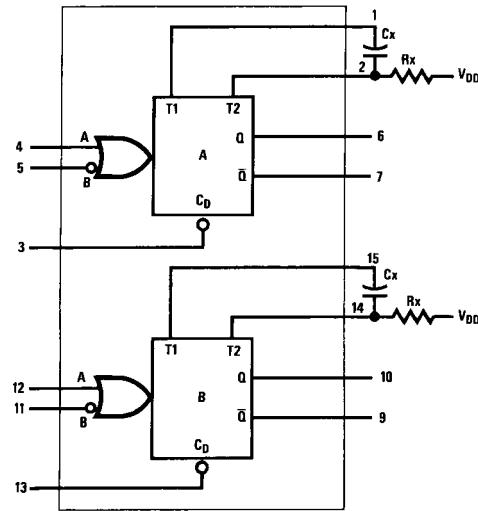

## Logic Diagram

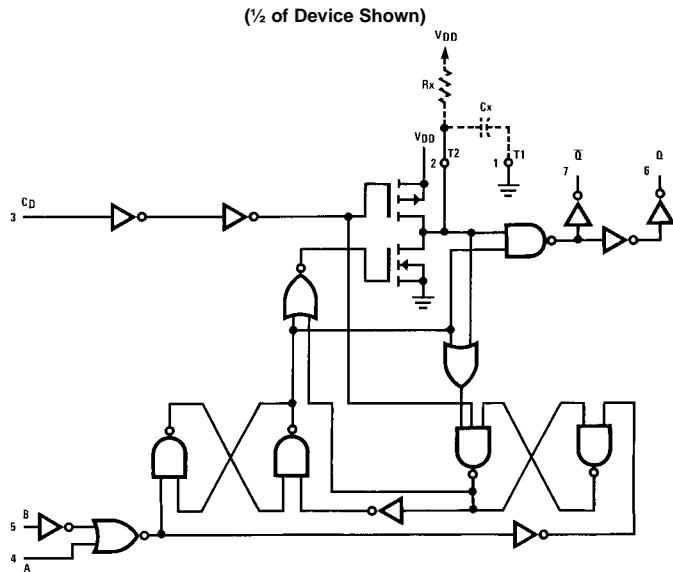

Note: Externally ground pins 1 and 15 to pin 8.

**Absolute Maximum Ratings**(Note 1)

(Note 2)

DC Supply Voltage ( $V_{DD}$ )	-0.5 $V_{DC}$ to +18 $V_{DC}$
Input Voltage, All Inputs ( $V_{IN}$ )	-0.5 $V_{DC}$ to $V_{DD}$ +0.5 $V_{DC}$
Storage Temperature Range ( $T_S$ )	-65°C to +150°C
Power Dissipation ( $P_D$ )	
Dual-In-Line	700 mW
Small Outline	500 mW
Lead Temperature ( $T_L$ )	
(Soldering, 10 seconds)	260°C

**Recommended Operating Conditions**(Note 2)

DC Supply Voltage ( $V_{DD}$ )	3V to 15V
Input Voltage ( $V_{IN}$ )	0V to $V_{DD}$ $V_{DC}$
Operating Temperature Range ( $T_A$ )	-40°C to +85°C

**Note 1:** "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. Except for "Operating Temperature Range", they are not meant to imply that the devices should be operated at these limits. The table of "Electrical Characteristics" provides conditions for actual device operation.

**Note 2:**  $V_{SS} = 0V$  unless otherwise specified.

**DC Electrical Characteristics**(Note 3)

Symbol	Parameter	Conditions	-40°C		+25°C			+85°C		Units
			Min	Max	Min	Typ	Max	Min	Max	
$I_{DD}$	Quiescent Device Current	$V_{DD} = 5V$		20		0.005	20		150	$\mu A$
		$V_{DD} = 10V$		40		0.010	40		300	$\mu A$
		$V_{DD} = 15V$		80		0.015	80		600	$\mu A$
$V_{OL}$	LOW Level Output Voltage	$V_{DD} = 5V$		0.05		0.05		0.05	0.05	V
		$V_{DD} = 10V$		0.05		0.05		0.05	0.05	V
		$V_{DD} = 15V$		0.05		0.05		0.05	0.05	V
$V_{OH}$	HIGH Level Output Voltage	$V_{DD} = 5V$	4.95		4.95	5.0		4.95		V
		$V_{DD} = 10V$	9.95		9.95	10.0		9.95		V
		$V_{DD} = 15V$	14.95		14.95	15.0		14.95		V
$V_{IL}$	LOW Level Input Voltage	$V_{DD} = 5V, V_O = 0.5V$ or $4.5V$		1.5		2.25	1.5		1.5	V
		$V_{DD} = 10V, V_O = 1V$ or $9V$		3.0		4.50	3.0		3.0	V
		$V_{DD} = 15V, V_O = 1.5V$ or $13.5V$		4.0		6.75	4.0		4.0	V
$V_{IH}$	HIGH Level Input Voltage	$V_{DD} = 5V, V_O = 0.5V$ or $4.5V$	3.5		3.5	2.75		3.5		V
		$V_{DD} = 10V, V_O = 1V$ or $9V$	7.0		7.0	5.50		7.0		V
		$V_{DD} = 15V, V_O = 1.5V$ or $13.5V$	11.0		11.0	8.25		11.0		V
$I_{OL}$	LOW Level Output Current (Note 4)	$V_{DD} = 5V, V_O = 0.4V$	0.52		0.44	0.88		0.36		mA
		$V_{DD} = 10V, V_O = 0.5V$	1.3		1.1	2.25		0.9		mA
		$V_{DD} = 15V, V_O = 1.5V$	3.6		3.0	8.8		2.4		mA
$I_{OH}$	HIGH Level Output Current (Note 4)	$V_{DD} = 5V, V_O = 4.6V$	-0.2		-0.16	-0.36		-0.12		mA
		$V_{DD} = 10V, V_O = 9.5V$	-0.5		-0.4	-0.9		-0.3		mA
		$V_{DD} = 15V, V_O = 13.5V$	-1.4		-1.2	-3.5		-1.0		mA
$I_{IN}$	Input Current	$V_{DD} = 15V, V_{IN} = 0V$		-0.3		-10 <sup>-5</sup>	-0.3		-1.0	$\mu A$
		$V_{DD} = 15V, V_{IN} = 15V$		0.3		10 <sup>-5</sup>	0.3		1.0	$\mu A$

**Note 3:**  $V_{SS} = 0V$  unless otherwise specified.

**Note 4:**  $I_{OH}$  and  $I_{OL}$  are tested one output at a time.

**AC Electrical Characteristics** (Note 5) $T_A = 25^\circ\text{C}$ ,  $C_L = 50 \text{ pF}$ ,  $R_L = 200 \text{ k}\Omega$ , Input  $t_r = t_f = 20 \text{ ns}$ , unless otherwise specified

Symbol	Parameter	Conditions	Min	Typ	Max	Units
$t_r$	Output Rise Time	$t_r = (3.0 \text{ ns/pF}) C_L + 30 \text{ ns}$ , $V_{DD} = 5.0\text{V}$ $t_r = (1.5 \text{ ns/pF}) C_L + 15 \text{ ns}$ , $V_{DD} = 10.0\text{V}$ $t_r = (1.1 \text{ ns/pF}) C_L + 10 \text{ ns}$ , $V_{DD} = 15.0\text{V}$		180 90 65	400 200 160	ns ns ns
$t_f$	Output Fall Time	$t_f = (1.5 \text{ ns/pF}) C_L + 25 \text{ ns}$ , $V_{DD} = 5.0\text{V}$ $t_f = (0.75 \text{ ns/pF}) C_L + 12.5 \text{ ns}$ , $V_{DD} = 10\text{V}$ $t_f = (0.55 \text{ ns/pF}) C_L + 9.5 \text{ ns}$ , $V_{DD} = 15.0\text{V}$		100 50 35	200 100 80	ns ns ns
$t_{PLH}$ $t_{PHL}$	Turn-Off, Turn-On Delay A or B to Q or $\bar{Q}$ $Cx = 15 \text{ pF}$ , $Rx = 5.0 \text{ k}\Omega$	$t_{PLH}, t_{PHL} = (1.7 \text{ ns/pF}) C_L + 240 \text{ ns}$ , $V_{DD} = 5.0\text{V}$ $t_{PLH}, t_{PHL} = (0.66 \text{ ns/pF}) C_L + 8 \text{ ns}$ , $V_{DD} = 10.0\text{V}$ $t_{PLH}, t_{PHL} = (0.5 \text{ ns/pF}) C_L + 65 \text{ ns}$ , $V_{DD} = 15.0\text{V}$		230 100 65	500 250 150	ns ns ns
$t_{PLH}$ $t_{PHL}$	Turn-Off, Turn-On Delay A or B to Q or $\bar{Q}$ $Cx = 100 \text{ pF}$ , $Rx = 10 \text{ k}\Omega$	$t_{PLH}, t_{PHL} = (1.7 \text{ ns/pF}) C_L + 620 \text{ ns}$ , $V_{DD} = 5.0\text{V}$ $t_{PLH}, t_{PHL} = (0.66 \text{ ns/pF}) C_L + 257 \text{ ns}$ , $V_{DD} = 10.0\text{V}$ $t_{PLH}, t_{PHL} = (0.5 \text{ ns/pF}) C_L + 185 \text{ ns}$ , $V_{DD} = 15.0\text{V}$		230 100 65	500 250 150	ns ns ns
$t_{WL}$ $t_{WH}$	Minimum Input Pulse Width A or B $Cx = 15 \text{ pF}$ , $Rx = 5.0 \text{ k}\Omega$	$V_{DD} = 5.0\text{V}$ $V_{DD} = 10.0\text{V}$ $V_{DD} = 15\text{V}$		60 20 20	150 50 50	ns ns ns
$t_{WL}$ $t_{WH}$		$V_{DD} = 5.0\text{V}$ $V_{DD} = 10.0\text{V}$ $V_{DD} = 15.0\text{V}$		60 20 20	150 50 50	ns ns ns
$PW_{OUT}$	Output Pulse Width Q or $\bar{Q}$ For $Cx < 0.01 \mu\text{F}$ (See Graph for Appropriate $V_{DD}$ Level) $Cx = 15 \text{ pF}$ , $Rx = 5.0 \text{ k}\Omega$	$V_{DD} = 5.0\text{V}$ $V_{DD} = 10.0\text{V}$ $V_{DD} = 15.0\text{V}$		550 350 300		ns ns ns
$PW_{OUT}$	For $Cx > 0.01 \mu\text{F}$ Use $PW_{out} = 0.2 Rx Cx \ln [V_{DD} - V_{SS}]$ $Cx = 10,000 \text{ pF}$ , $Rx = 10 \text{ k}\Omega$	$V_{DD} = 5.0\text{V}$ $V_{DD} = 10.0\text{V}$ $V_{DD} = 15.0\text{V}$	15 10 15	29 37 42	45 90 95	$\mu\text{s}$ $\mu\text{s}$ $\mu\text{s}$
$t_{PLH}$ $t_{PHL}$	Reset Propagation Delay, $t_{PLH}, t_{PHL}$ $Cx = 15 \text{ pF}$ , $Rx = 5.0 \text{ k}\Omega$	$V_{DD} = 5.0\text{V}$ $V_{DD} = 10.0\text{V}$ $V_{DD} = 15.0\text{V}$		325 90 60	600 225 170	ns ns ns
$t_{PLH}$ $t_{PHL}$	$Cx = 1000 \text{ pF}$ , $Rx = 10 \text{ k}\Omega$	$V_{DD} = 5.0\text{V}$ $V_{DD} = 10.0\text{V}$ $V_{DD} = 15.0\text{V}$		7.0 6.7 6.7		$\mu\text{s}$ $\mu\text{s}$ $\mu\text{s}$
$t_{RR}$	Minimum Retrigger Time $Cx = 15 \text{ pF}$ , $Rx = 5.0 \text{ k}\Omega$	$V_{DD} = 5.0\text{V}$ $V_{DD} = 10.0\text{V}$ $V_{DD} = 15.0\text{V}$		0 0 0		ns ns ns
$t_{RR}$	$Cx = 1000 \text{ pF}$ , $Rx = 10 \text{ k}\Omega$	$V_{DD} = 5.0\text{V}$ $V_{DD} = 10.0\text{V}$ $V_{DD} = 15.0\text{V}$		0 0 0		ns ns ns
Pulse Width Match between Circuits in the Same Package $Cx = 10,000 \text{ pF}$ , $Rx = 10 \text{ k}\Omega$		$V_{DD} = 5.0\text{V}$ $V_{DD} = 10.0\text{V}$ $V_{DD} = 15.0\text{V}$		6 8 8	25 35 35	% % %

Note 5: AC parameters are guaranteed by DC correlated testing.

## Pulse Widths

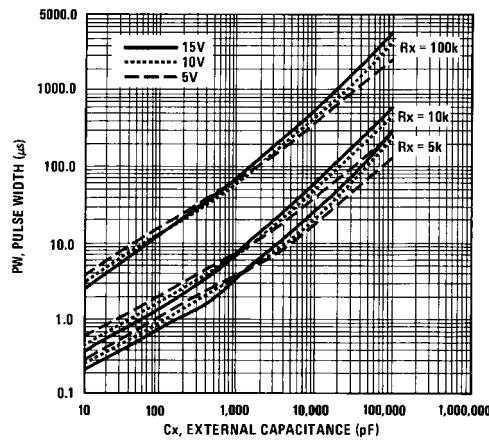


FIGURE 1. Pulse Width vs  $C_x$

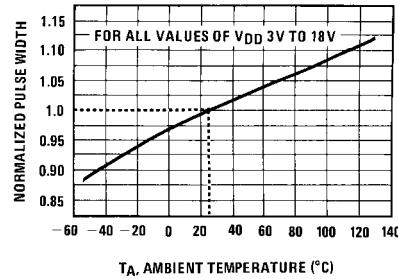


FIGURE 2. Normalized Pulse Width vs Temperature

## AC Test Circuits and Waveforms


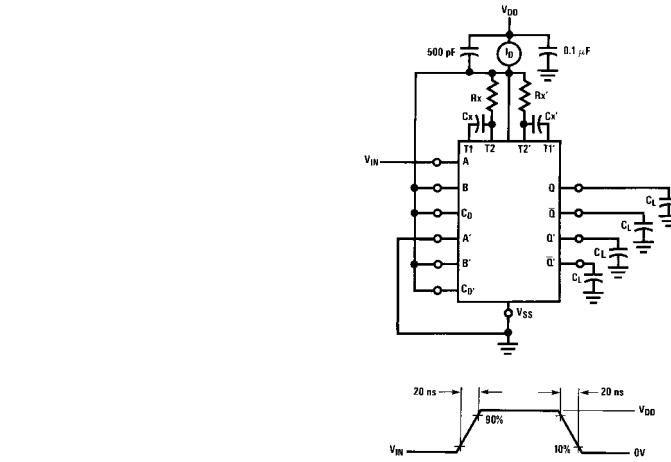


FIGURE 3. Power Dissipation Test Circuit and Waveforms

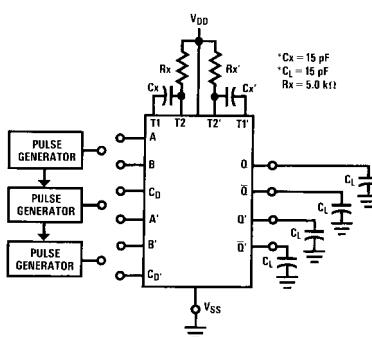

\*Includes capacitance of probes, wiring, and fixture parasitic.

Note: AC test waveforms for PG1, PG2, and PG3 in Figure 4.

## Input Connections

Characteristics	$C_D$	A	B
$t_{PLH}$ , $t_{PHL}$ , $t_r$ , $t_f$ , $PW_{out}$ , $PW_{in}$	$V_{DD}$	PG1	$V_{DD}$
$t_{PLH}$ , $t_{PHL}$ , $t_r$ , $t_f$ , $PW_{out}$ , $PW_{in}$	$V_{DD}$	$V_{SS}$	PG2
$t_{PLH(R)}$ , $t_{PHL(R)}$ , $PW_{in}$	PG3	PG1	PG2




FIGURE 4. AC Test Circuit

## AC Test Circuits and Waveforms (Continued)




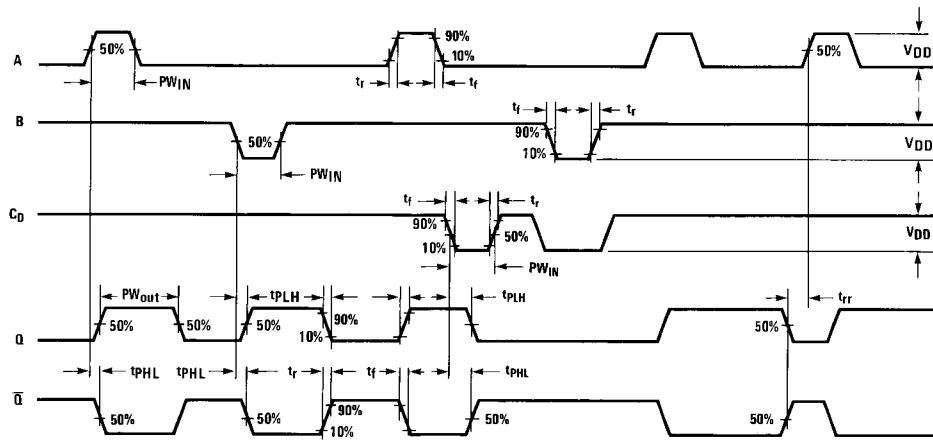


FIGURE 5. AC Test Waveforms

**Physical Dimensions** inches (millimeters) unless otherwise noted

16-Lead Small Outline Integrated Circuit (SOIC) JEDEC MS-012, 0.150" Narrow Body  
Package Number M16A

## Physical Dimensions inches (millimeters) unless otherwise noted (Continued)

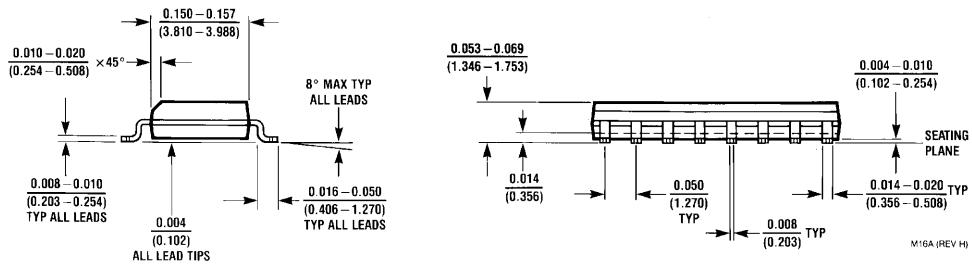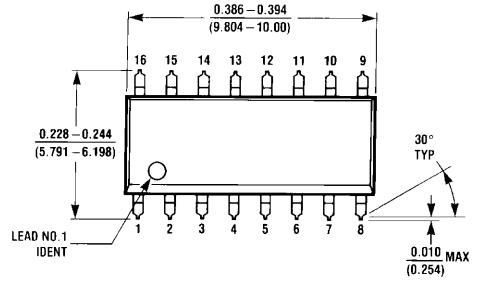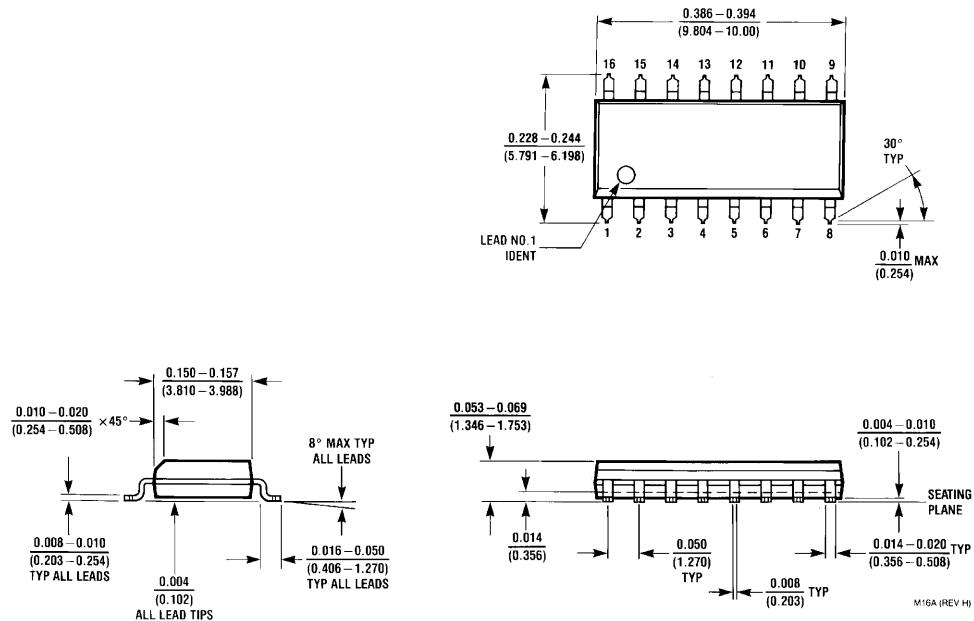

16-Lead Plastic Dual-In-Line Package (PDIP), JEDEC MS-001, 0.300" Wide  
Package Number N16E

## LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

[www.fairchildsemi.com](http://www.fairchildsemi.com)