






3M™ Solder Cup D Sub Socket, 8000 Series

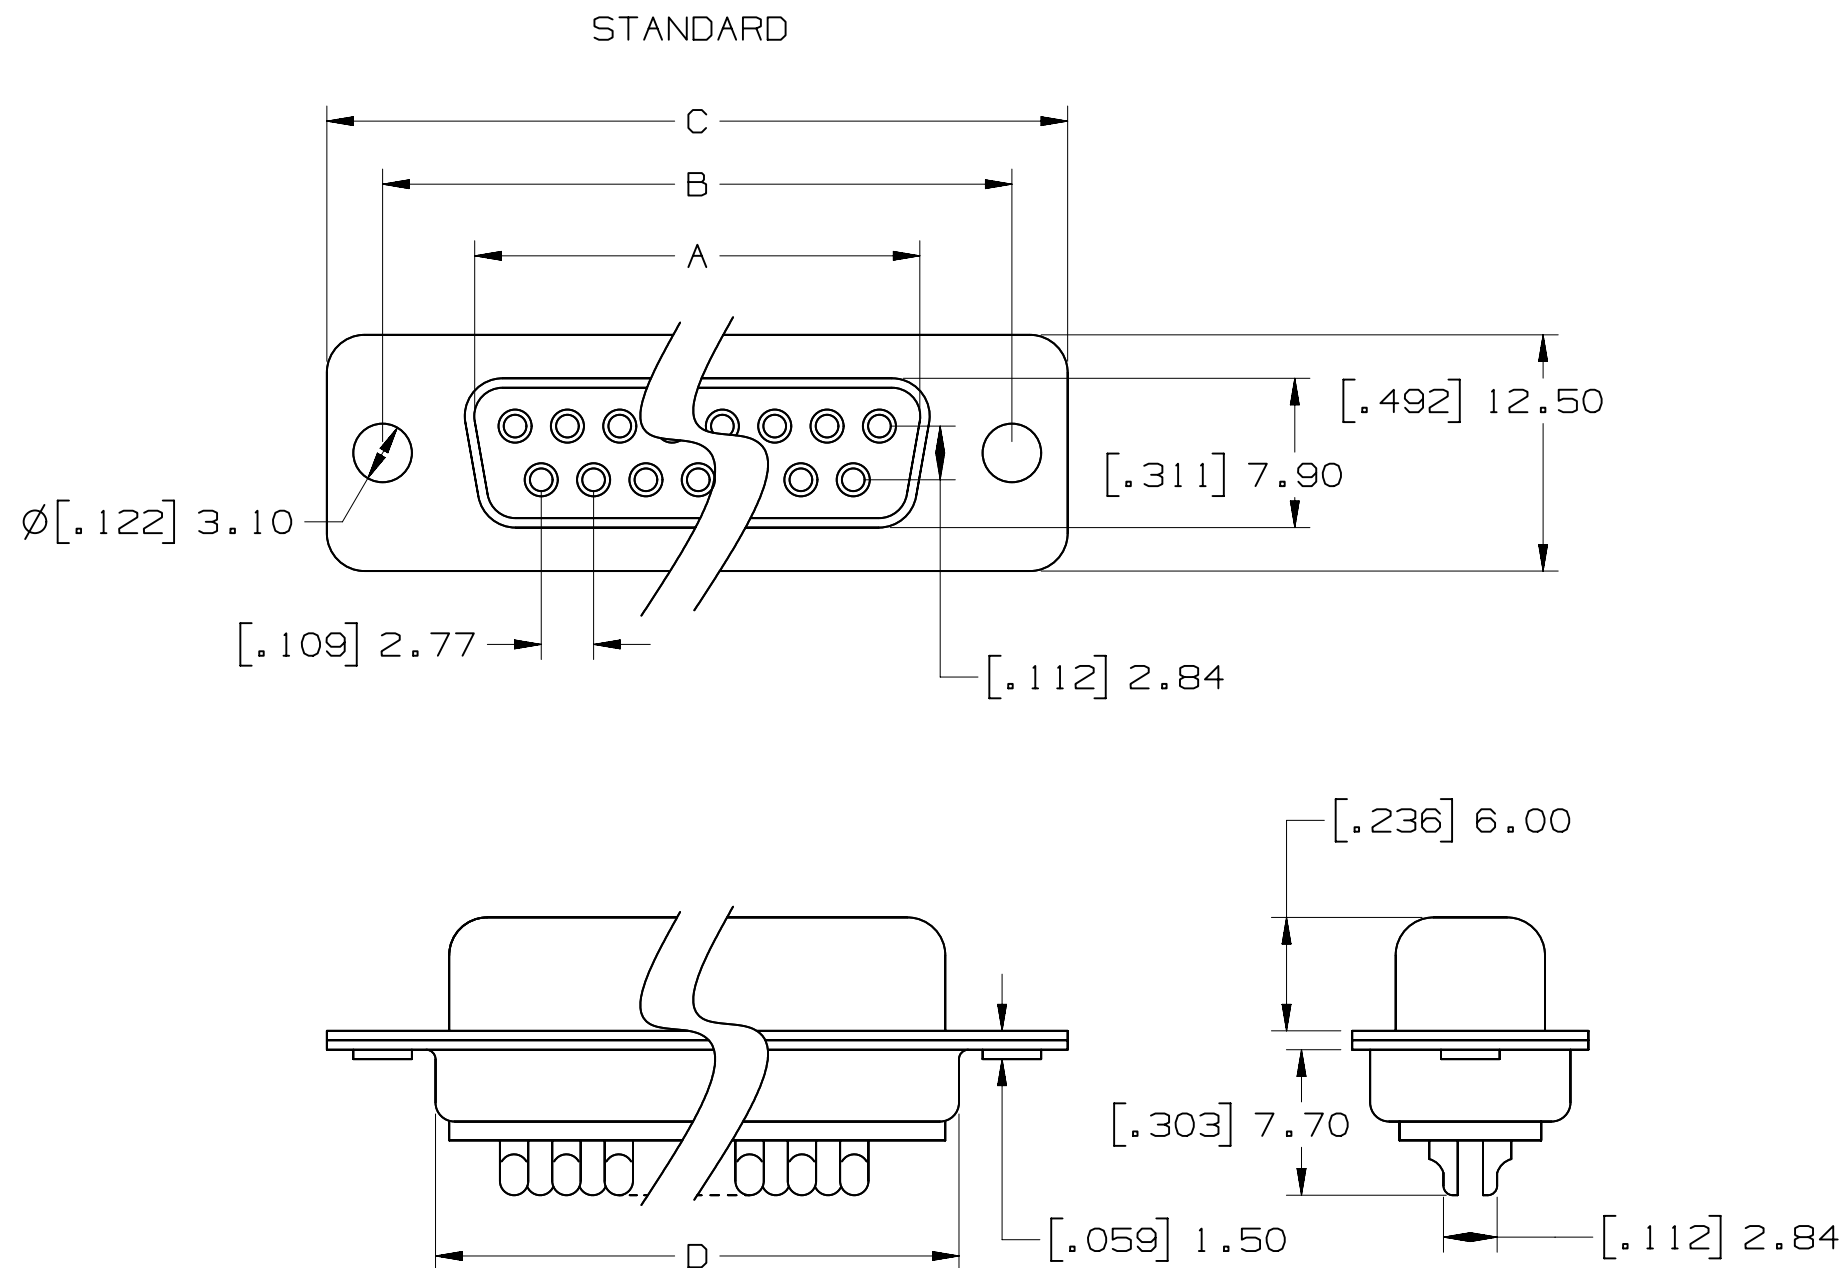

| POSITION | A             | B             | C             | D             |
|----------|---------------|---------------|---------------|---------------|
| 9        | [.642] 16.30  | [.984] 25.00  | [1.213] 30.80 | [.756] 19.20  |
| 15       | [.969] 24.60  | [1.311] 33.30 | [1.543] 39.20 | [1.091] 27.70 |
| 25       | [1.508] 38.30 | [2.248] 57.10 | [2.091] 53.10 | [1.618] 41.10 |
| 37       | [2.157] 54.80 | [2.500] 63.50 | [2.732] 69.40 | [2.256] 57.30 |
| 50*      | [2.055] 52.20 | [2.402] 61.00 | [2.638] 67.00 | [2.169] 55.10 |

\*50 POSITION AVAILABLE IN STANDARD ONLY

| PERFORMANCE            |                        |
|------------------------|------------------------|
| OPERATION VOLTAGE:     | 250V MAX.              |
| CURRENT:               | 3A MAX.                |
| INSULATION RESISTANCE: | 3000 MOhm MIN @ 500VDC |
| WITHSTANDING VOLTAGE:  | 1000 VAC / MIN.        |
| TEMPERATURE RATING:    | -55°C to 105°C         |
| CONTACT RESISTANCE:    | 15 mOhms MAX.          |

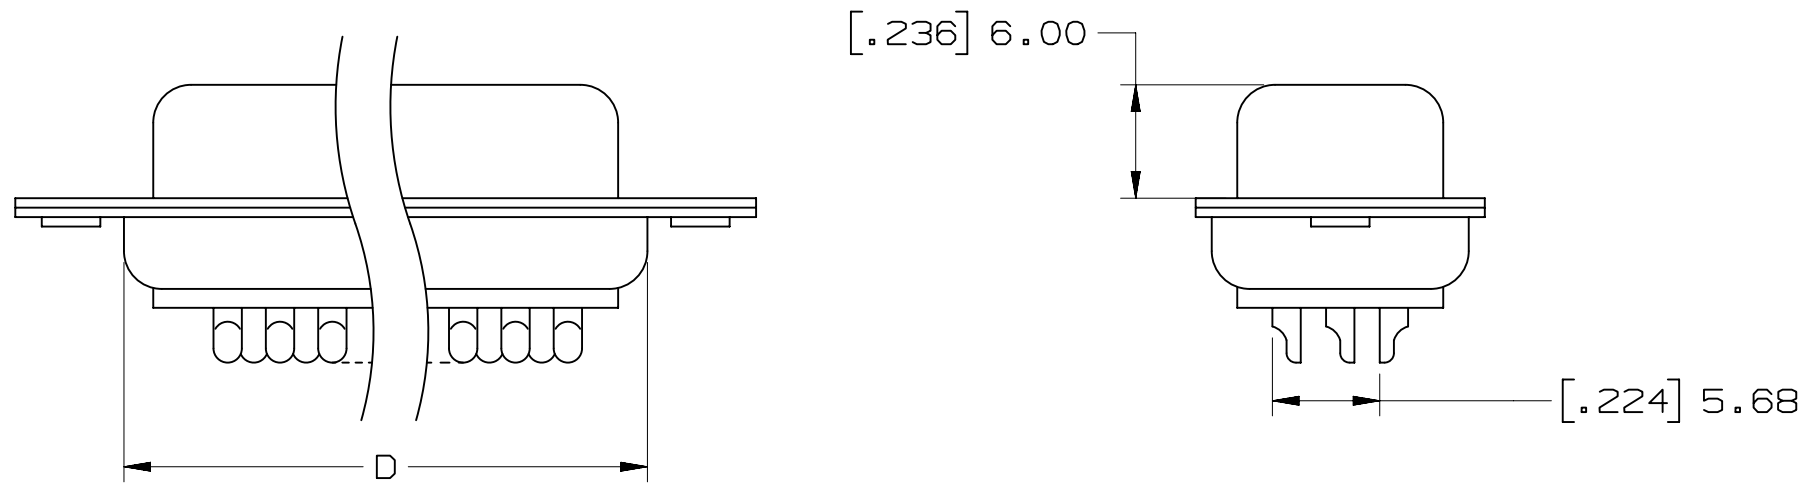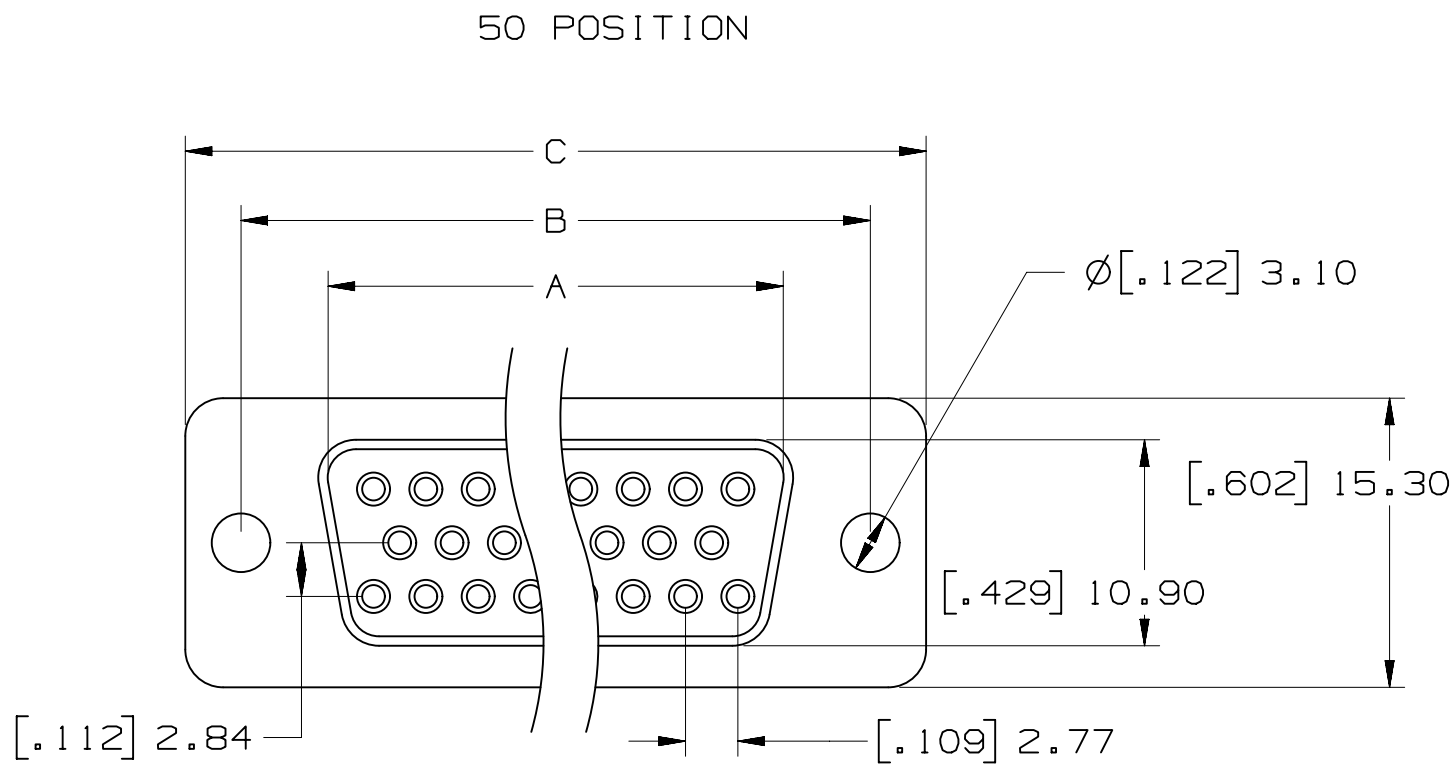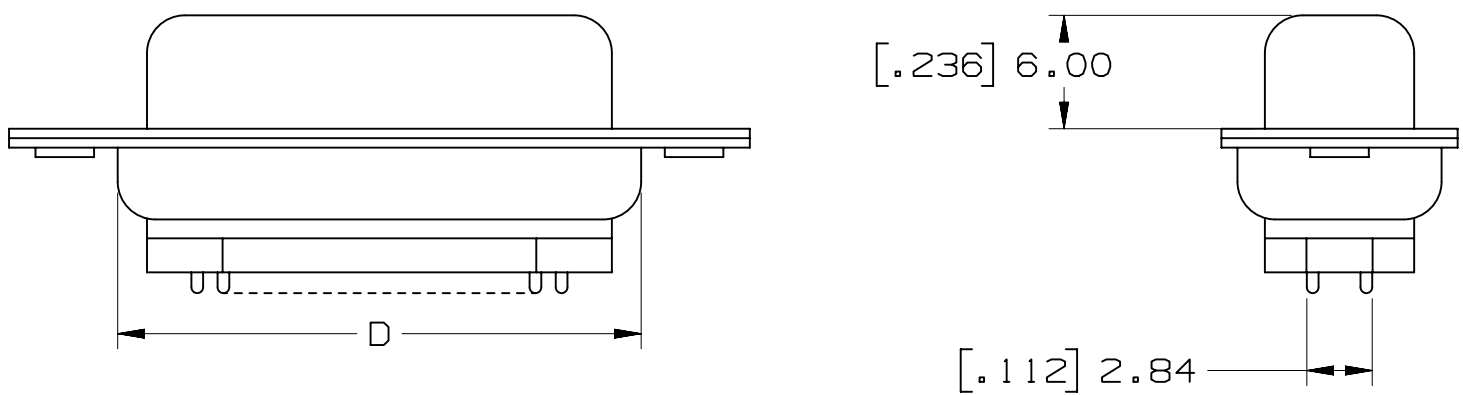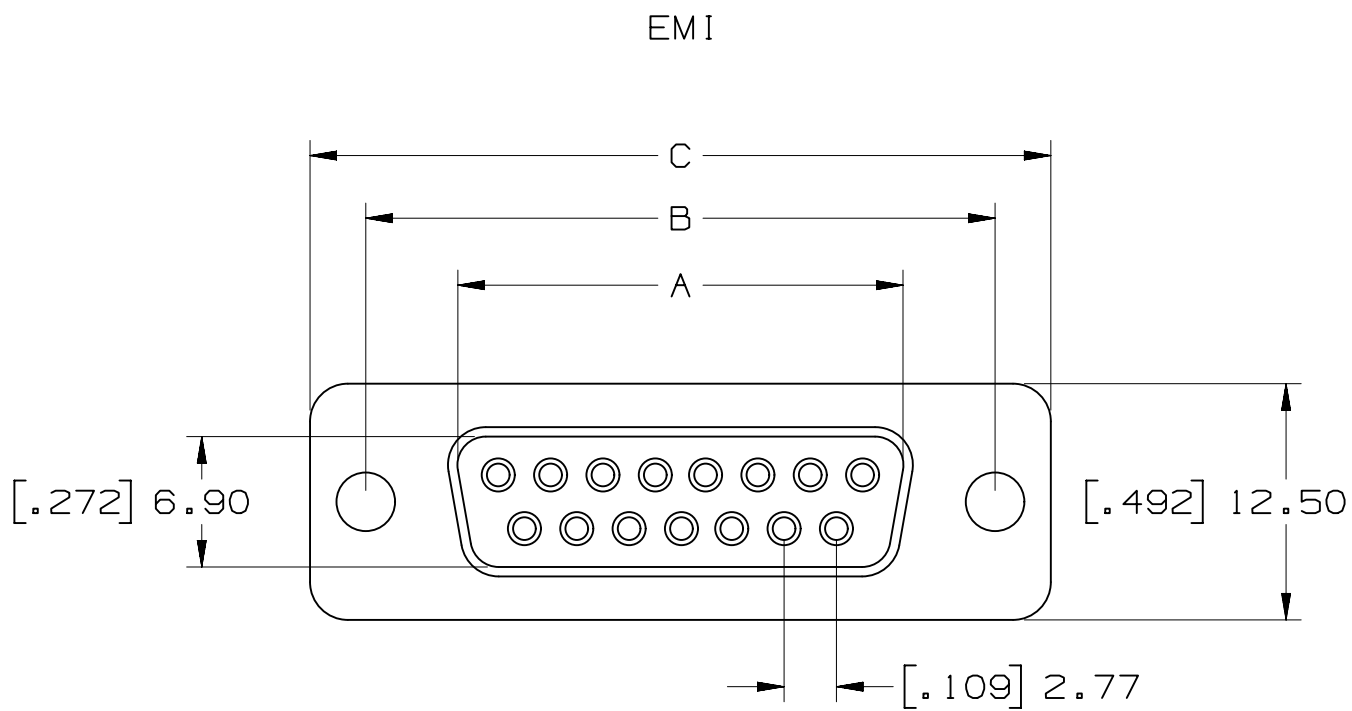

8RXX-X00X

NUMBER OF CONTACTS (SEE TABLE)

PLATING  
1 - AU FLASH  
2 - 30μ" AU

EMI  
N - STANDARD  
E - EMI

Unless otherwise noted, references to industry specifications are intended to indicate substantial compliance to the material elements of the specification. Such references should not be construed as a guarantee of compliance to all requirements in a given specification.

3M ELECTRONIC SOLUTIONS DIVISION  
INTERCONNET SOLUTIONS  
<http://www.3mconnectors.com>

3M IS A TRADEMARK OF 3M COMPANY.  
FOR TECHNICAL, SALES OR ORDERING  
INFORMATION, CALL 800-225-5373



NOTES

- 1 MATERIAL:  
THERMAL PLASTIC UL94V-0  
CONTACTS:  
COPPER ALLOY  
SHELL:  
G3141 SPCC OR EQUIVALENT
- 2 PLATING:  
50μ" NICKEL UNDERPLATE  
1μ" AU WIPING AREA OR  
30μ" AU WIPING AREA  
100-200μ" TIN (BRIGHT TIN) SOLDER TAIL
- 3 MATES WITH:  
BPXX-X00X
- 4 SEE THE REGULATORY INFORMATION  
APPENDIX (RIA) IN "RoHS"  
COMPLIANCE SECTION OF  
[WWW.3MCONNECTOR.COM](http://WWW.3MCONNECTOR.COM) FOR  
COMPLIANCE INFORMATION  
(RIA E1 & C1 APPLY)

|                                                                                                                                                                                                                        |       |                            |      |            |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|----------------------------|------|------------|
| C                                                                                                                                                                                                                      | 46292 | MAR 28, 2013               | SJS  | ARM        |
| B                                                                                                                                                                                                                      | 34516 | AUG 29, 2011               | SJS  | ARM        |
| A                                                                                                                                                                                                                      | 34511 | MAY 18, 2011               | SJS  | ARM        |
| REV                                                                                                                                                                                                                    | ECO   | ISSUE DATE AND DESCRIPTION | DRFT | CHKD       |
| DRP                                                                                                                                                                                                                    | SJS   | DATE MAY 18, 2011          | MFG  | DATE       |
| CHKD                                                                                                                                                                                                                   | ARM   | DATE MAY 18, 2011          | APPL | DATE       |
| © 3M COPYR[IGHT] 2013                                                                                                                                                                                                  |       |                            |      |            |
| This document and the information it contains are 3M property and may not be reproduced or further distributed without 3M permission, or used or disclosed other than for 3M authorized purposes. All rights reserved. |       |                            |      |            |
| TITLE                                                                                                                                                                                                                  |       |                            |      |            |
| 8RXX-X00X D-SUB<br>SOLDER CUP SOCKET<br>TS-2402                                                                                                                                                                        |       |                            |      |            |
| CAGE NUMBER                                                                                                                                                                                                            | SIZE  | DRAWING NO.                | REV. |            |
| D                                                                                                                                                                                                                      |       | 78-5100-2402-5             | C    |            |
| MODEL                                                                                                                                                                                                                  | BR    | DET                        | YES  | NO         |
|                                                                                                                                                                                                                        |       | LISTS                      |      | SHT 1 OF 2 |



| POSITION | MOUNTING METHOD | A             | B             | C             | D             | E            | F           | G           | H           | J           |
|----------|-----------------|---------------|---------------|---------------|---------------|--------------|-------------|-------------|-------------|-------------|
| 9        | FRONT           | .874[ 22.2 ]  | .437[ 11.1 ]  | .984[ 25.0 ]  | .492[ 12.5 ]  | .513[ 13.0 ] | .257[ 6.5 ] | .120[ 3.1 ] | .060[ 1.5 ] | .083[ 2.1 ] |
|          | REAR            | .806[ 20.5 ]  | .403[ 10.2 ]  | .984[ 25.0 ]  | .492[ 12.5 ]  | .449[ 11.4 ] | .225[ 5.7 ] | .120[ 3.1 ] | .060[ 1.5 ] | .132[ 3.4 ] |
| 15       | FRONT           | 1.202[ 30.5 ] | .601[ 15.3 ]  | 1.312[ 33.3 ] | .656[ 16.7 ]  | .513[ 13.0 ] | .257[ 6.5 ] | .120[ 3.1 ] | .060[ 1.5 ] | .083[ 2.1 ] |
|          | REAR            | 1.134[ 28.8 ] | .567[ 14.4 ]  | 1.312[ 33.3 ] | .656[ 16.7 ]  | .449[ 11.4 ] | .225[ 5.7 ] | .120[ 3.1 ] | .060[ 1.5 ] | .132[ 3.4 ] |
| 25       | FRONT           | 1.743[ 44.3 ] | .872[ 22.2 ]  | 1.852[ 47.0 ] | .926[ 23.5 ]  | .513[ 13.0 ] | .257[ 6.5 ] | .120[ 3.1 ] | .060[ 1.5 ] | .083[ 2.1 ] |
|          | REAR            | 1.674[ 42.5 ] | .837[ 21.3 ]  | 1.852[ 47.0 ] | .926[ 23.5 ]  | .449[ 11.4 ] | .225[ 5.7 ] | .120[ 3.1 ] | .060[ 1.5 ] | .132[ 3.4 ] |
| 37       | FRONT           | 2.391[ 60.7 ] | 1.196[ 30.4 ] | 2.500[ 63.5 ] | 1.250[ 31.8 ] | .513[ 13.0 ] | .257[ 6.5 ] | .120[ 3.1 ] | .060[ 1.5 ] | .083[ 2.1 ] |
|          | REAR            | 2.326[ 59.1 ] | 1.163[ 29.5 ] | 2.500[ 63.5 ] | 1.250[ 31.8 ] | .449[ 11.4 ] | .225[ 5.7 ] | .120[ 3.1 ] | .060[ 1.5 ] | .132[ 3.4 ] |
| 50       | FRONT           | 2.297[ 58.3 ] | 1.149[ 29.2 ] | 2.406[ 61.1 ] | 1.203[ 30.6 ] | .623[ 15.8 ] | .312[ 7.9 ] | .120[ 3.1 ] | .060[ 1.5 ] | .083[ 2.1 ] |
|          | REAR            | 2.218[ 56.3 ] | 1.109[ 28.2 ] | 2.406[ 61.1 ] | 1.203[ 30.6 ] | .555[ 14.1 ] | .278[ 7.1 ] | .120[ 3.1 ] | .060[ 1.5 ] | .132[ 3.4 ] |

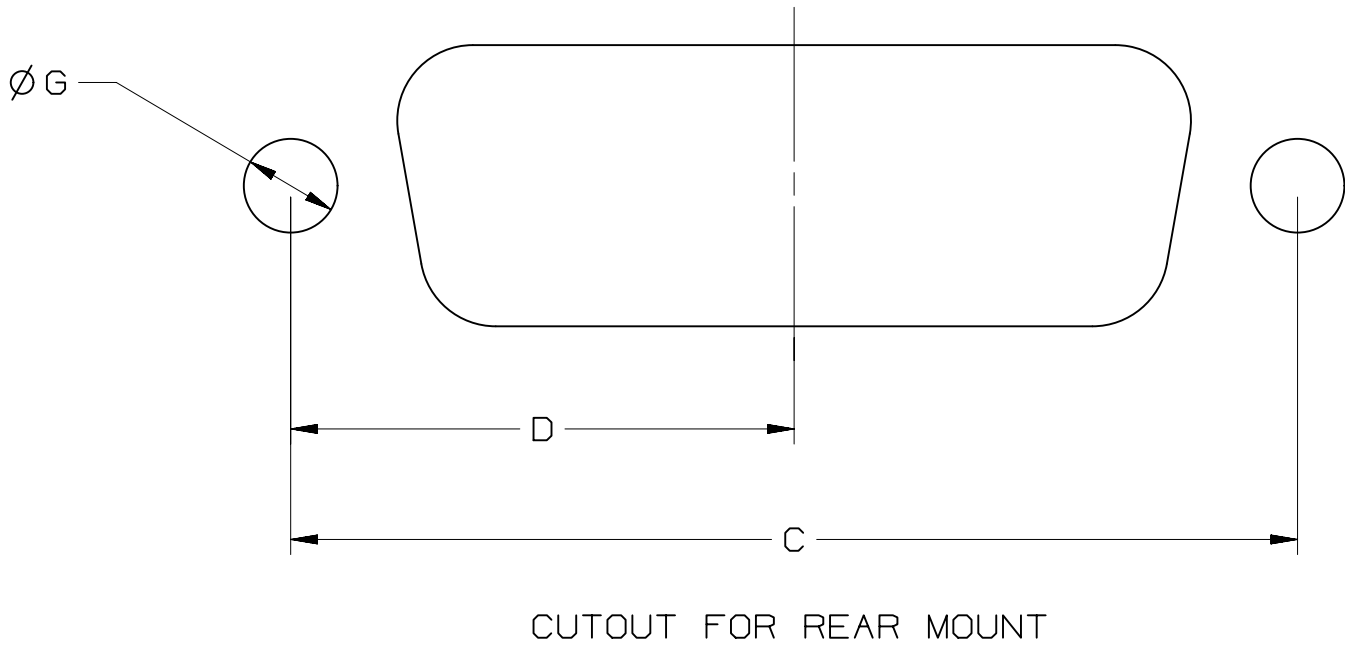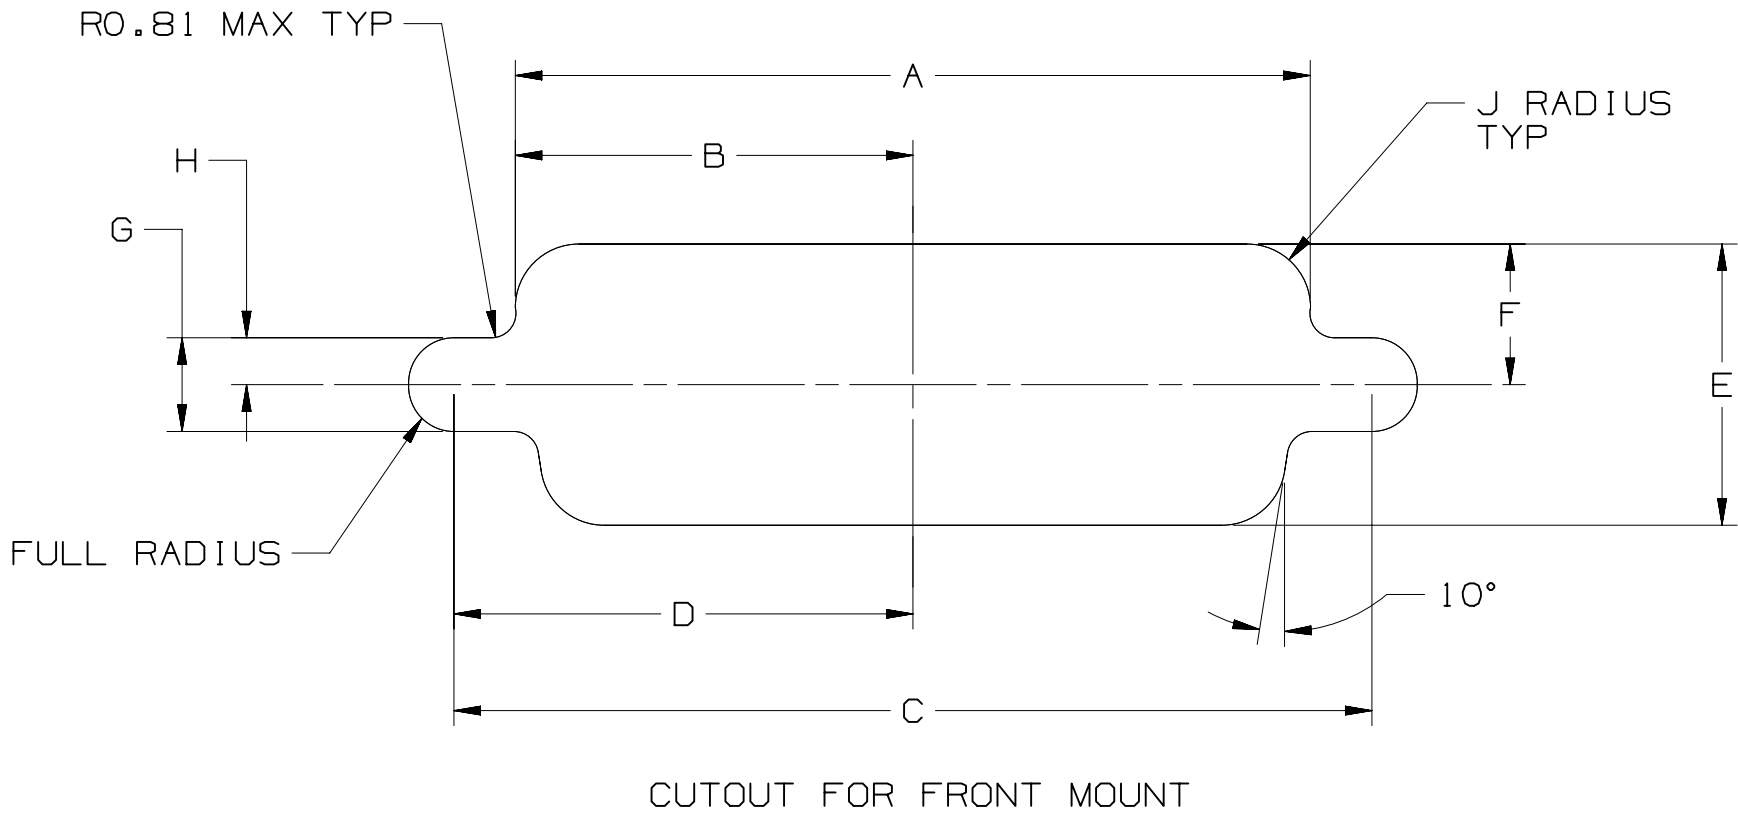

|                                 |  |                            |  |                                    |  |                    |  |                                                                                                                                                                                                                        |  |               |  |            |  |
|---------------------------------|--|----------------------------|--|------------------------------------|--|--------------------|--|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|---------------|--|------------|--|
| C                               |  | 46292                      |  | MAR 28, 2013                       |  | SJS                |  | ARM                                                                                                                                                                                                                    |  |               |  |            |  |
| B                               |  | 34516                      |  | CORRECT SHELL MATL                 |  | SJS                |  | ARM                                                                                                                                                                                                                    |  |               |  |            |  |
| A                               |  | 34511                      |  | AUG 29, 2011                       |  | SJS                |  | ARM                                                                                                                                                                                                                    |  |               |  |            |  |
|                                 |  |                            |  | CHANGE MOHMS TO MOHMS, UPDATE ROHS |  | SJS                |  | ARM                                                                                                                                                                                                                    |  |               |  |            |  |
|                                 |  |                            |  | MAY 18, 2011                       |  | SJS                |  | ARM                                                                                                                                                                                                                    |  |               |  |            |  |
|                                 |  |                            |  | MAY 18, 2011                       |  | SJS                |  | ARM                                                                                                                                                                                                                    |  |               |  |            |  |
| DESIGN REFERENCE                |  | NEXT ASSEMBLY              |  | REV                                |  | ECO                |  | ISSUE DATE AND DESCRIPTION                                                                                                                                                                                             |  | DRFT          |  | CHKD       |  |
| XREF CODES                      |  |                            |  | DRP                                |  | SJS                |  | DATE                                                                                                                                                                                                                   |  | MFG           |  | DATE       |  |
|                                 |  |                            |  | CHKD                               |  | ARM                |  | DATE                                                                                                                                                                                                                   |  | MAY 18, 2011  |  | APPL       |  |
|                                 |  |                            |  |                                    |  |                    |  | DATE                                                                                                                                                                                                                   |  | MAY 18, 2011  |  | DATE       |  |
| DIVISION                        |  | DIVISION CODE              |  | 3M Center                          |  | St. Paul, MN 55144 |  | © 3M. COPYRIGHT 2013                                                                                                                                                                                                   |  |               |  |            |  |
| DO NOT SCALE DRAWING            |  | SCALE 1 1                  |  | TOLERANCES EXCEPT AS NOTED         |  |                    |  | This document and the information it contains are 3M property and may not be reproduced or further distributed without 3M permission, or used or disclosed other than for 3M authorized purposes. All rights reserved. |  |               |  |            |  |
| THIRD ANGLE PROJECTION          |  | INCHES 0 ±.00 ±.002 ±.0000 |  | MILLIMETERS 0 ±.1 ±.05 ±.005       |  |                    |  |                                                                                                                                                                                                                        |  |               |  |            |  |
| INTERPRET PER ASME Y14.5 - 1994 |  | MAX SURFACE ROUGHNESS 125  |  | ALL SURFACES MARKED ONLY           |  | ANGLES ±.1°        |  | TITLE 8RXX-X00X D-SUB SOLDER CUP SOCKET TS-2402                                                                                                                                                                        |  |               |  |            |  |
|                                 |  |                            |  |                                    |  | CAGE NUMBER D      |  | SIZE 78-5100-2402-5                                                                                                                                                                                                    |  | DRAWING NO. C |  | REV.       |  |
|                                 |  |                            |  |                                    |  | MODEL BR           |  | DET. LISTS                                                                                                                                                                                                             |  | YES NO        |  | SHT 2 OF 2 |  |