

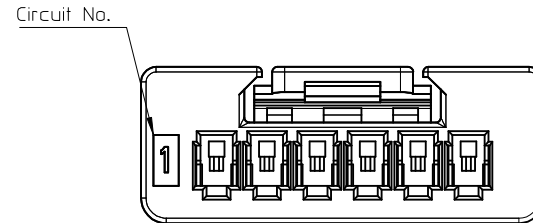

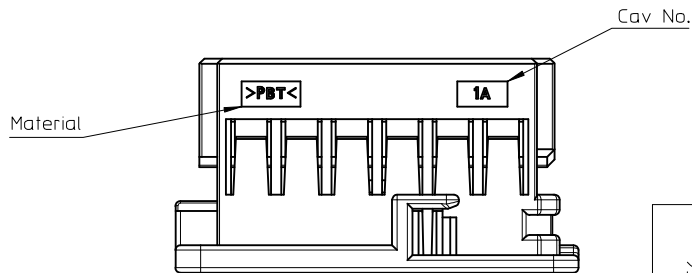


GENERAL TOLERANCE										USED ON
10 MAX	30 MAX	50 MAX	70 MAX	100 MAX	120 MAX	250 MAX	250 OVR	ANGLE	ECCENT	
±0.15	±0.20	±0.30	±0.40	±0.50	±0.75	±0.90	±1.4	±0.5°	0.1	

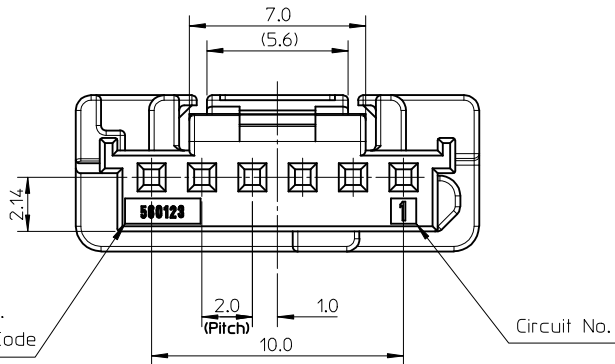

NOTES:

1. MATERIALS : POLYESTER (PBT), GLASS FILLED,UL 94V-0
2. MATES WITH : 502352, 560020 SERIES
3. APPLICABLE TERMINAL : 560124-0101, 560124-0131
4. APPLICABLE ISL : 560125-0600, 560125-0601
5. GENERAL TOLERANCES : SEE TABLE
6. ELV AND RoHS COMPLIANT
7. PRODUCT SPECIFICATION : PS-560123-001
8. PACKING SPECIFICATION : PK-560123-001

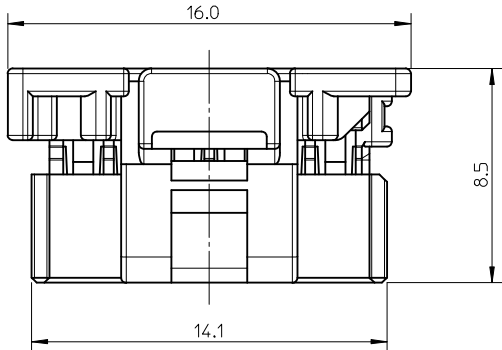

ORDER NO.	MATERIAL NO.	COLOR
560123-0600	5601230600	WHITE
560123-0601	5601230601	BLACK
560123-0602	5601230602	RED
560123-0604	5601230604	BLUE

ADDED OPTION		QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE		DESIGN UNITS METRIC		THIRD ANGLE PROJECTION	
EC NO.	REV	DESCRIPTION	REV	mm	INCH	DRAWN BY	DATE	TITLE	SCALE	DESIGN UNITS	METRIC	THIRD ANGLE	PROJECTION
560123-0600	1	560123-0600	1	±---	±---	YIBAOK	2014/07/08	NEW 2.0 PITCH W/B CONN.					
560123-0601	1	560123-0601	1	±---	±---	BCY00N	2014/07/08	REC. 6WAY HSG					
560123-0602	1	560123-0602	1	±---	±---	BCY00N	2014/07/08	DURACLIK™ ISL SERIES					
560123-0604	1	560123-0604	1	±---	±---	SRTAK	2014/08/26	MOLEX INCORPORATED					
ANGULAR ±---°						MATERIAL NO.		DOCUMENT NO.		SHEET NO.			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS						SEE TABLE		SD-560123-004		1 OF 1			
						SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					