

Products **Browse Products** -By Device --By Product Line--Attachment Methods --Interface Materials --Accessories -•


Useful Links MSDS Safety Sheets How to Order? Find Sales Rep Find Distributor Sample Request **Quote Request** Catalog Request Building a Part # Part # Cross Ref

63730

Printer Friendly Version

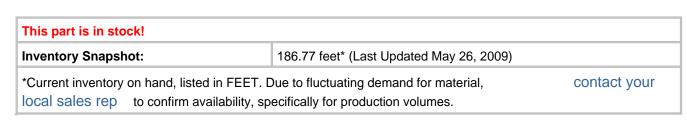

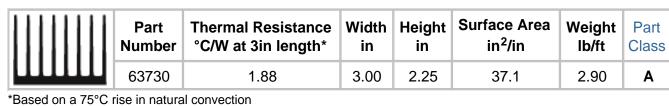

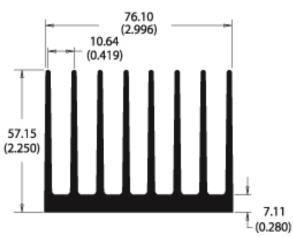


Thermal Curves based on 3.000 in length


New Length 3.000 jⁿ in jⁿ mm

Change Length

Natural Convection

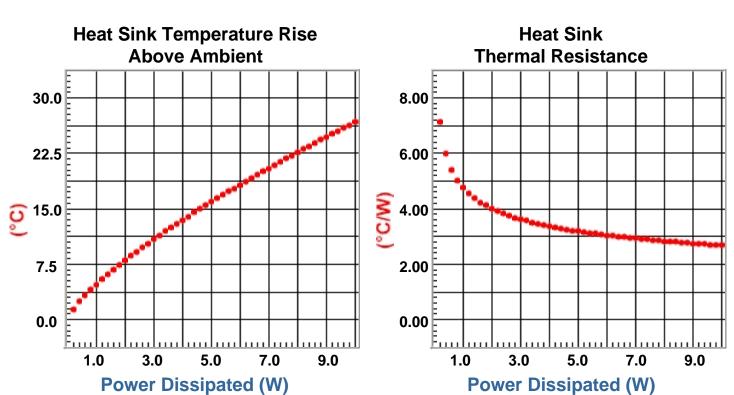

Forced Convection

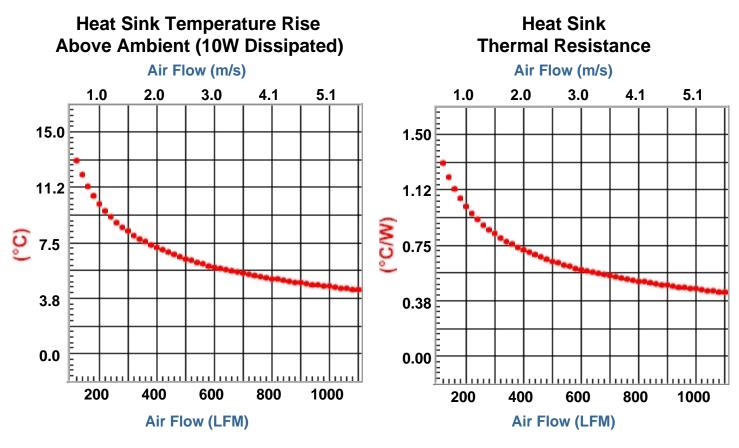

Building a Part Number

Full Bar Length = 8.00ft

Base Part #	Bar Length	Finish	Length (use zeros for full or half bars)
5 digit base part #	1 Full (normally 8ft)	<u>F</u> Unfinished	00000
	2 Half (small cut fee)	<u>F</u> Unfinished	00000
	3 Custom (cut to specified length)	B Black Anodized C Gold Chromate U Unfinished* V AavSHIELD ³	indicate length in inches to three decimal places; If the part is less than 10 inches, the first of these 5 digits (digit 7 of the 12 digit series) would be a zero (0).

00000

Examples:

63730

1

If you wanted to simply order extrusion # 63730 in standard bar form, the part number would be:637301F00000. The unit price would be sold by the foot.

F

If you wanted extrusion 63730 cut to a length of 6.500" and black anodized, the part number would be:637303B06500. The unit price would be by the piece.

If you wanted extrusion 63730 cut to a length of 14.725" and a wash finish, the part number would be:637303U14725. The unit price would be by the piece.

• ©2009 Aavid Thermalloy, LLC

*For unfinished extrusions with cut lengths other than half bar, the finish designation is a U. Standard Aavid Thermalloy parts require all 12 positions to be complete.

Non-Standard Extrusions

Aavid Thermalloy has over 10,000 extrusion profile designs on file, most with the extrusion die already available. These

requirements - we can design custom solutions.

Home • Sitemap • Disclaimer Statement

parts have minimum order requirements and longer lead times, but may be cost effective compared to a new design.

Customizing & Advanced Capabilities

Challenge us with your thermal

We offer several options for those applications which require a more unique solution.