


5 Amp Low Dropout Positive Voltage Regulator

The PJ1084 Series are high performance positive voltage regulators are designed for use in applications requiring low dropout performance at full rated current. Additionally, the PJ1084 Series provides excellent regulation over variations due to changes in line, load and temperature. Outstanding features include low dropout performance at rated current, fast transient response, internal current limiting and thermal shutdown protection of the output device. The PJ1084 Series are three terminal regulators with fixed and adjustable voltage options available in popular packages.

FEATURES


- Low dropout performance 1.3V max.
- Full current rating over line and temperature
- Fast transient response
- ±2%Total output regulation over line, load and temperature
- Adjust pin current max 90 μ A over temperature
- Line regulation typical 0.015%.
- Load regulation typical 0.05%.
- Fixed/adjustable output voltage
- TO-220 & TO-263 package

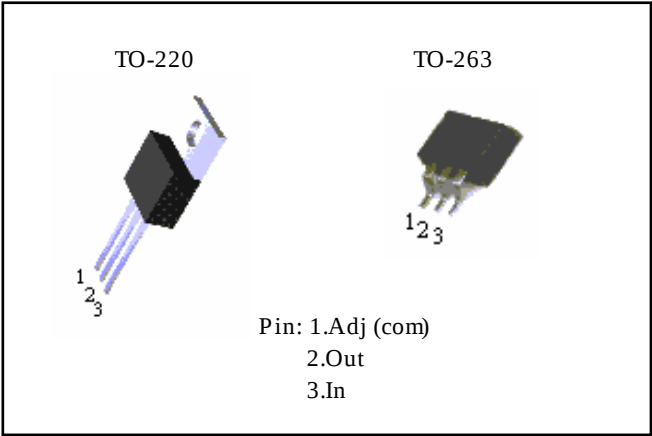

ORDERING INFORMATION

Device	Operating Temperature	Package
PJ1084CZ PJ1084CZ-2.5 PJ1084CZ-3.3	-20°C to +85°C	TO-220
PJ1084CM PJ1084CM-2.5 PJ1084CM-3.3		TO-263

NOTE: Contact factory for additional voltage option.

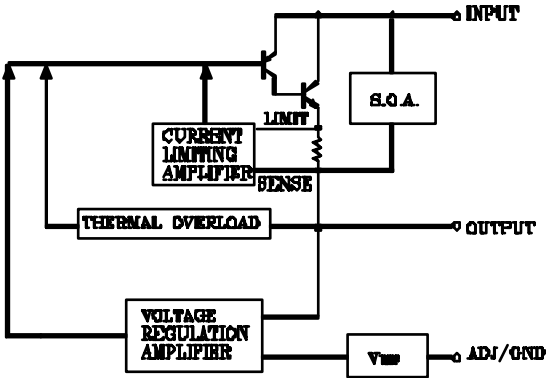

Parameter	Symbol	Maximum	Units
Input Voltage	V _{IN}	12	V
Power Dissipation	P _D	Internally Limited	W
Thermal Resistance Junction to Case	θ _{JC}	2.5	°C/W
Thermal Resistance Junction to Ambient	θ _{JA}	50	
Operating Junction Temperature Range	T _J	0 to 125	
Storage Temperature Range	T _{STG}	-65 to 150	°C
Lead Temperature (Soldering) 10 Sec.	T _{LEAD}	260	

5 Amp Low Dropout Positive Voltage Regulator

ELECTRICAL CHARACTERISTICS

Unless otherwise specified, Adjust $V_{IN} = 2.75V$ to $12V$ and Adjust $I_O = 10mA$ to $5.0A$

Fixed $V_{IN} = 4.75V$ to $12V$ and Fixed $I_O = 10mA$ to $5.0A$

Parameter	Symbol	Test Conditions			Test Limits			Units
		$V_{IN} - V_{OUT}$	I_O	$T_J^{(4)}$	Min	Typ	Max	
Output Voltage ⁽¹⁾	V_O	5V	10mA	25	0.99 Vo	V_O	1.01 Vo	V
Fixed Voltage				Over Temp.	0.98 Vo		1.02 Vo	
Reference Voltage ⁽¹⁾	V_{REF}	5V	10mA	25	1.238	1.250	1.262	
Adj Voltage				Over Temp.	1.225		1.275	
Line Regulation ⁽¹⁾	$REG_{(LINE)}$		10mA	25		0.015	0.2	%
(Vin-Vout=3V)				Over Temp.		0.035		
Load Regulation ⁽¹⁾	$REG_{(LOAD)}$			25		0.1	0.3	
(Vin-Vout=3V)				Over Temp.		0.2	0.4	
Dropout Voltage	V_D			25		1		V
$\Delta V_{REF} = 1\%$						1.1	1.3	
Current Limit	I_{CL}			Over Temp.	5.5	6.5		A
(Vin-Vout=5V)								
Quiescent Current	I_Q	5V				12	14	mA
Fixed Model								
Temperature Coefficient	T_C					0.005		%/°C
Adjust Pin Current	I_{ADJ}			25		55		μA
							120	
Adjust Pin Current Change	ΔI_{ADJ}					0.2	5	
Temperature Stability	T_S	5V	500mA	Over Temp.		0.5		%
Minimum Load Current	I_O	5V				5	10	mA
Adjust Model								
RMS Output Noise ⁽²⁾	V_N			25		0.003		%Vo
Ripple Rejection Ratio ⁽³⁾	R_A	5V	5.0A	Over Temp.	60	72		dB

(1)Low duty cycle pulse testing with Kelvin connections required.


(2)Bandwidth of 10Hz to 10KHz.

(3)120Hz input ripple (C_{ADJ} for ADJ) = $25 \mu F$.

(4)Over Temp.-over specified operating junction temperature range.


ELECTRICAL CHARACTERISTICS

FIXED VOLTAGE REGULATOR (1)(2)

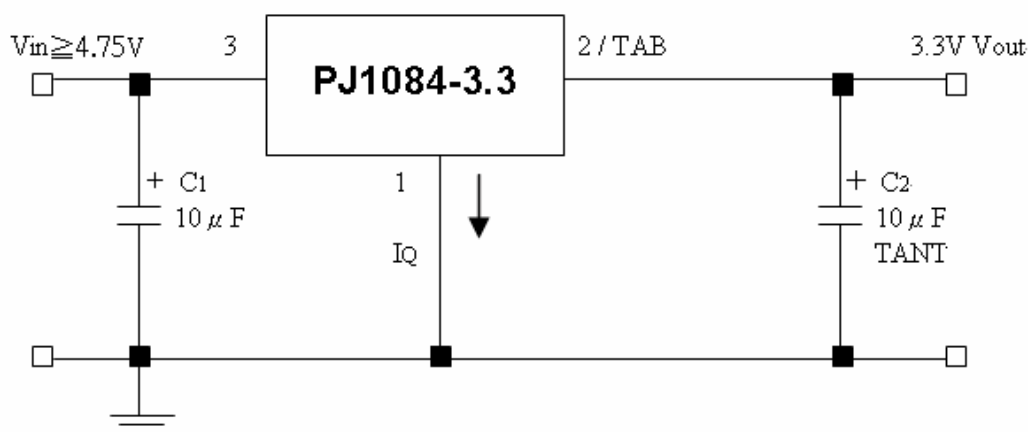







- (1) C1 NEEDED IF DEVICE IS FAR FROM FILTER CAPACITORS
- (2) C2 REQUIRED FOR STABILITY

ADJUSTABLE VOLTAGE REGULATOR (1)(2)



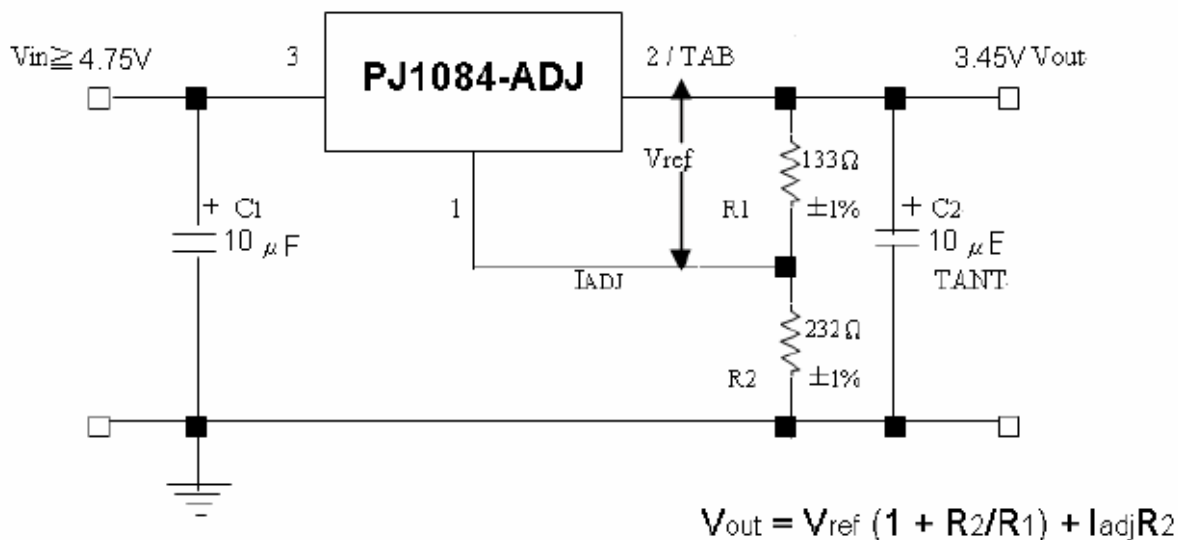


- (1) C1 NEEDED IF DEVICE IS FAR FROM FILTER CAPACITORS
- (2) C2 REQUIRED FOR STABILITY



5 Amp Low Dropout Positive Voltage Regulator

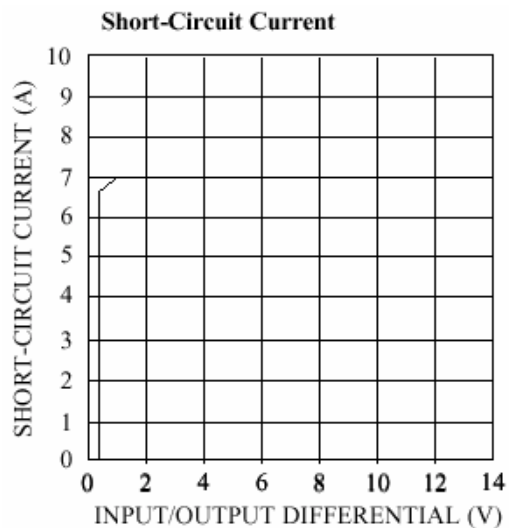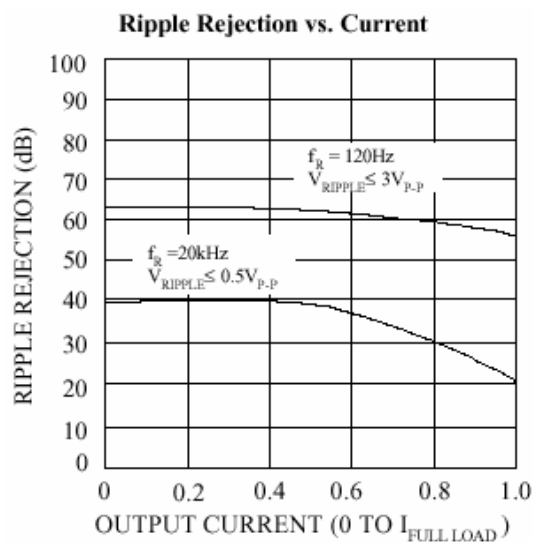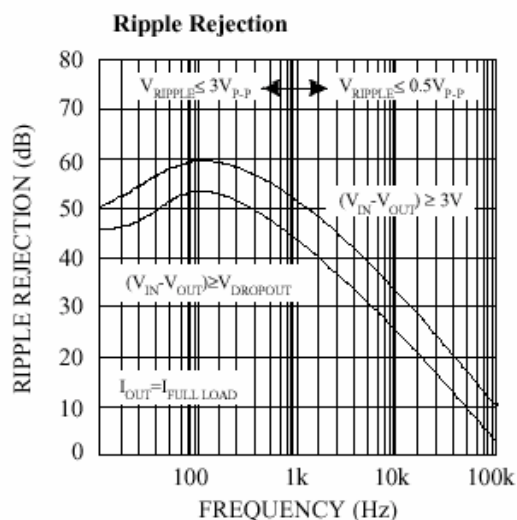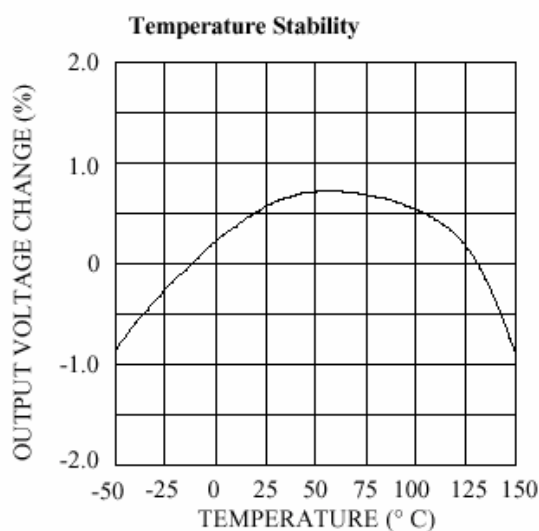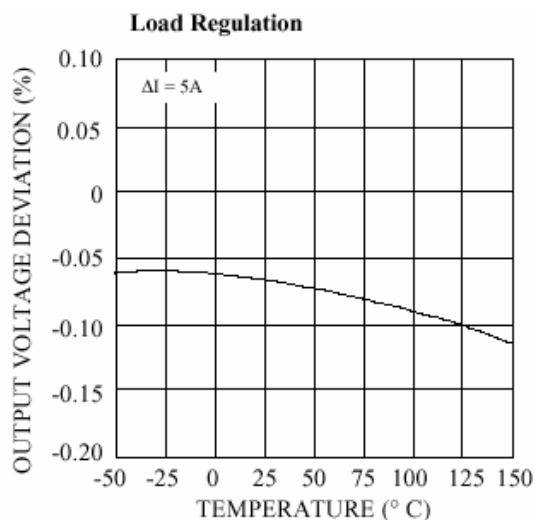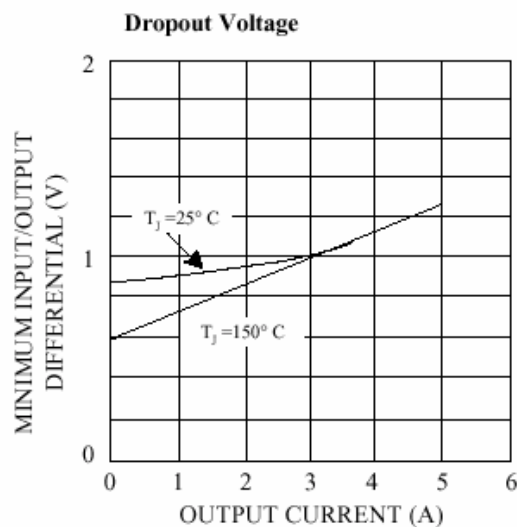

5 Amp Low Dropout Positive Voltage Regulator

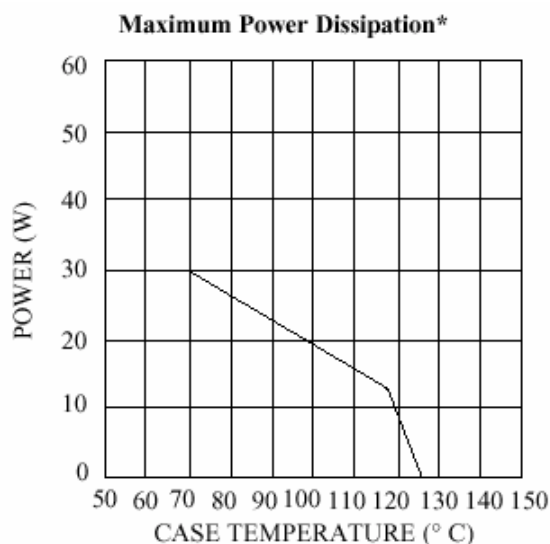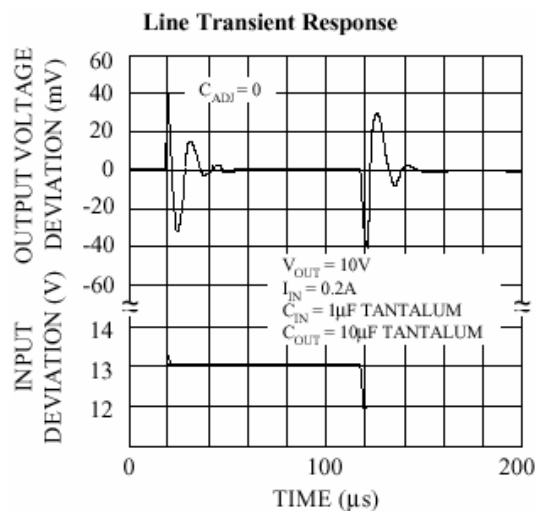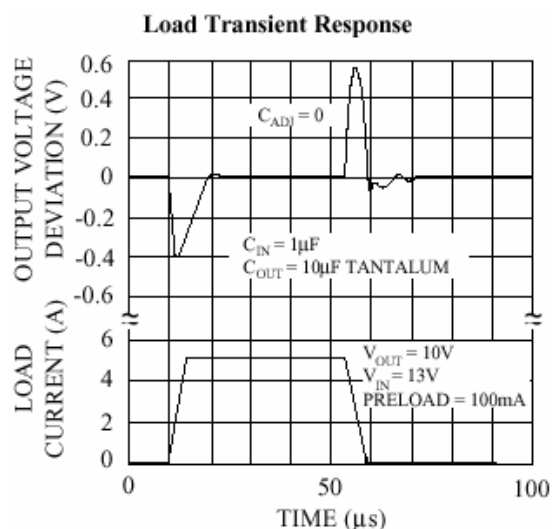


*AS LIMITED BY MAXIMUM JUNCTION TEMPERATURE

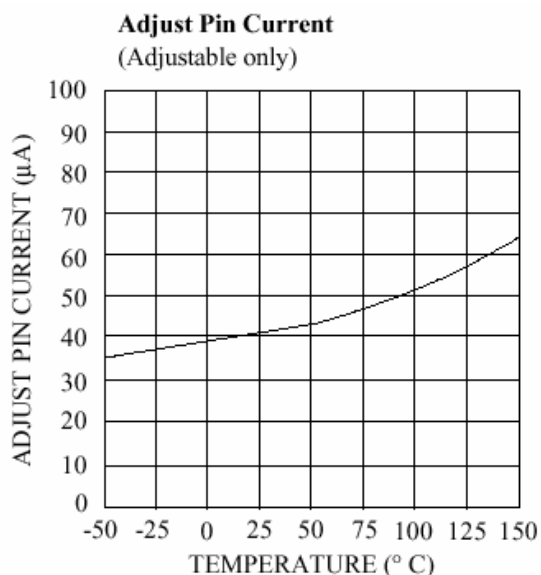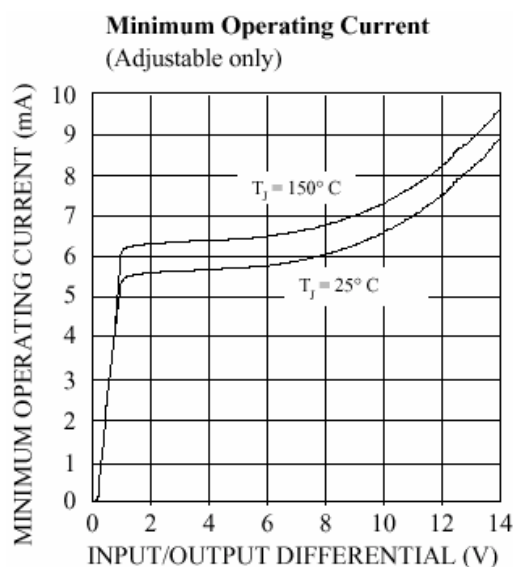

5 Amp Low Dropout Positive Voltage Regulator

TO-220 Unit:mm

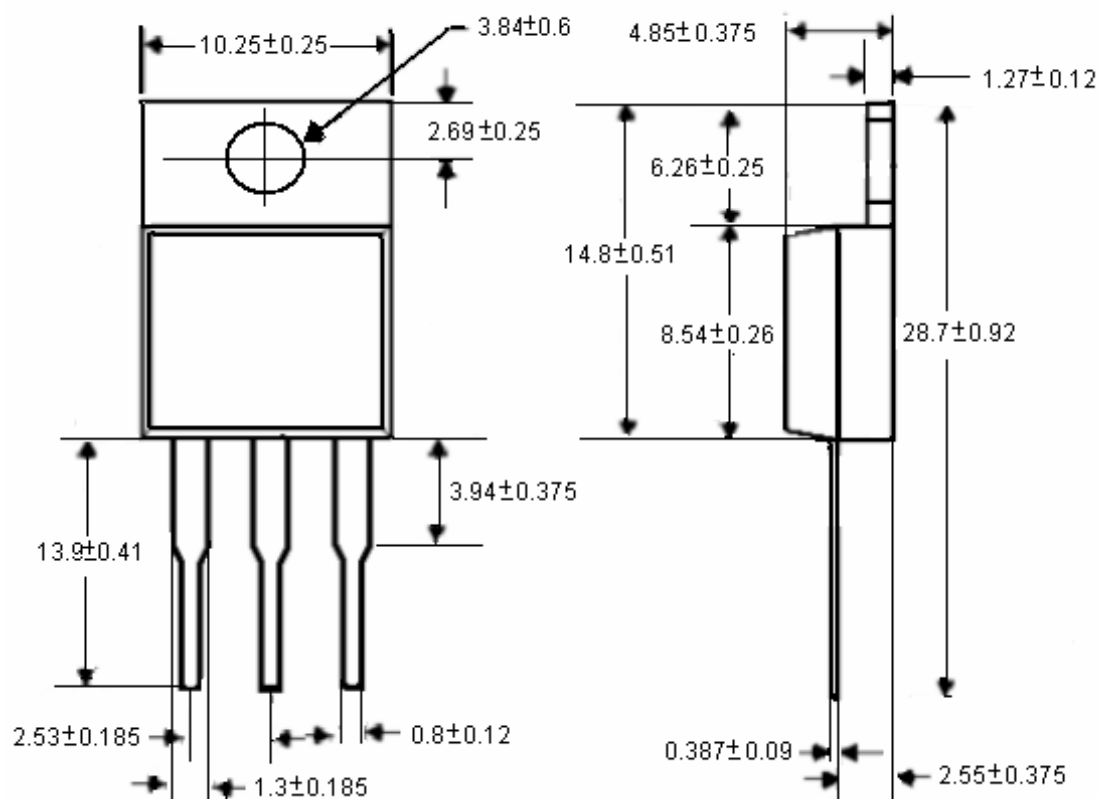

TO-263 Unit:mm

