

High Performance 32K×8 CMOS SRAM




AS7C256
AS7C256L

32K×8 CMOS SRAM (Common I/O)

FEATURES



- Organization: 32,768 words × 8 bits
- High speed
 - 10/12/15/20/25/35 ns address access time
 - 3/3/4/5/6/8 ns output enable access time
- Low power consumption
 - Active: 660 mW max (10 ns cycle)
 - Standby: 11 mW max, CMOS I/O
2.75 mW max, CMOS I/O, L version
 - Very low DC component in active power
- 2.0V data retention (L version)
- Equal access and cycle times
- Easy memory expansion with $\overline{\text{CE}}$ and $\overline{\text{OE}}$ inputs
- TTL-compatible, three-state I/O
- 28-pin JEDEC standard packages
 - 300 mil PDIP and SOJ
Socket compatible with 7C512 and 7C1024
 - 330 mil SOIC
 - 8×13.4 TSOP
- ESD protection > 2000 volts
- Latch-up current > 200 mA

LOGIC BLOCK DIAGRAM

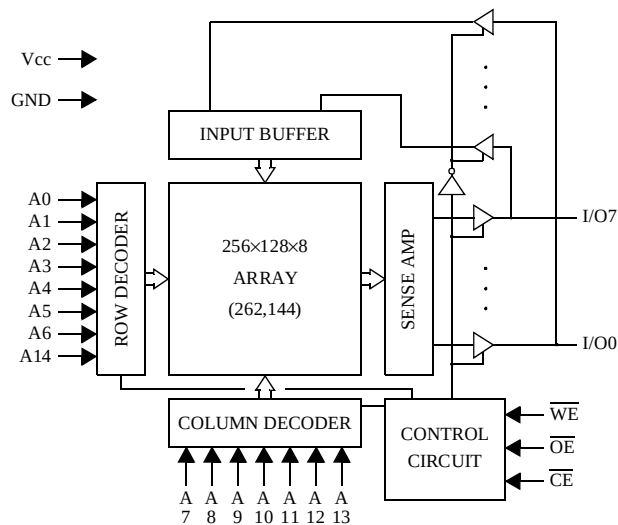

AS7C256-01

PIN ARRANGEMENT

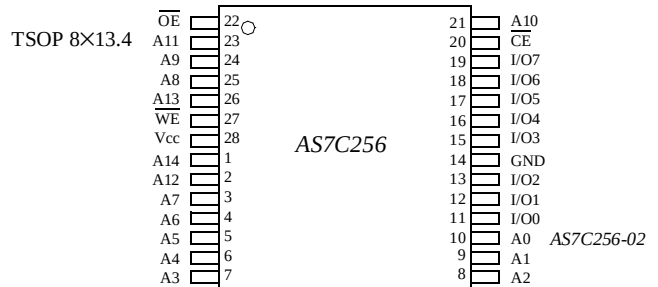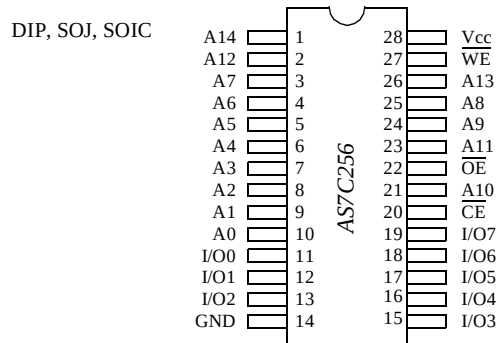

SELECTION GUIDE

	7C256-10	7C256-12	7C256-15	7C256-20	7C256-25	7C256-35	Unit
Maximum Address Access Time	10	12	15	20	25	35	ns
Maximum Output Enable Access Time	3	3	4	5	6	8	ns
Maximum Operating Current	120	115	110	100	90	80	mA
Maximum CMOS Standby Current	2.0	2.0	2.0	2.0	2.0	2.0	mA
	L	0.5	0.5	0.5	0.5	0.5	mA

ALLIANCE SEMICONDUCTOR



FUNCTIONAL DESCRIPTION

The AS7C256 is a high performance CMOS 262,144-bit Static Random Access Memory (SRAM) organized as 32,768 words $\times$ 8 bits. It is designed for memory applications where fast data access, low power, and simple interfacing are desired.

Equal address access and cycle times (t_{AA} , t_{RC} , t_{WC}) of 10/12/15/20/25/35 ns with output enable access times (t_{OE}) of 3/3/4/5/6/8 ns are ideal for high performance applications. A chip enable ($\overline{CE}$) input permits easy memory expansion with multiple-bank memory organizations.

When $\overline{CE}$ is HIGH the device enters standby mode. The standard AS7C256 is guaranteed not to exceed 11 mW power consumption in standby mode; the L version is guaranteed not to exceed 2.75 mW, and typically requires only 500 μ W. The L version also offers 2.0V data retention, with maximum power consumption in this mode of 300 μ W.

A write cycle is accomplished by asserting chip enable ($\overline{CE}$) and write enable ($\overline{WE}$) LOW. Data on the input pins I/O0-I/O7 is written on the rising edge of $\overline{WE}$ (write cycle 1) or $\overline{CE}$ (write cycle 2). To avoid bus contention, external devices should drive I/O pins only after outputs have been disabled with output enable ($\overline{OE}$) or write enable ($\overline{WE}$).

A read cycle is accomplished by asserting chip enable ($\overline{CE}$) and output enable ($\overline{OE}$) LOW, with write enable ($\overline{WE}$) HIGH. The chip drives I/O pins with the data word referenced by the input address. When chip enable or output enable is HIGH, or write enable is LOW, output drivers stay in high-impedance mode.

All chip inputs and outputs are TTL-compatible, and operation is from a single 5V supply. The AS7C256 is packaged in all high volume industry standard packages.

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Min	Max	Unit
Voltage on Any Pin Relative to GND	V_t	-0.5	+7.0	V
Power Dissipation	P_D	—	1.0	W
Storage Temperature (Plastic)	T_{stg}	-55	+150	$^{\circ}$ C
Temperature Under Bias	T_{bias}	-10	+85	$^{\circ}$ C
DC Output Current	I_{out}	—	20	mA

NOTE: Stresses greater than those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions outside those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

TRUTH TABLE

$\overline{CE}$	$\overline{WE}$	$\overline{OE}$	Data	Mode
H	X	X	High Z	Standby (I_{SB} , I_{SB1})
L	H	H	High Z	Output Disable
L	H	L	D_{out}	Read
L	L	X	D_{in}	Write

Key: X = Don't Care, L = LOW, H = HIGH



RECOMMENDED OPERATING CONDITIONS

 $(T_a = 0^{\circ}\text{C to } +70^{\circ}\text{C})$

Parameter	Symbol	Min	Typ	Max	Unit
Supply Voltage	V_{CC}	4.5	5.0	5.5	V
	GND	0.0	0.0	0.0	V
Input Voltage	V_{IH}	2.2	–	$V_{CC}+1$	V
	V_{IL}	–0.5*	–	0.8	V

* V_{IL} min = –3.0V for pulse width less than $t_{RC}/2$.

DC OPERATING CHARACTERISTICS¹

 $(V_{CC} = 5V \pm 10\%, \text{ GND} = 0V, T_a = 0^{\circ}\text{C to } +70^{\circ}\text{C})$

			-10		-12		-15		-20		-25		-35		
Parameter	Symbol	Test Conditions	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Unit
Input Leakage Current	$ I_{LI} $	$V_{CC} = \text{Max}, V_{in} = \text{GND to } V_{CC}$	–	1	–	1	–	1	–	1	–	1	–	1	μA
Output Leakage Current	$ I_{LO} $	$\overline{CE} = V_{IH}, V_{CC} = \text{Max}, V_{out} = \text{GND to } V_{CC}$	–	1	–	1	–	1	–	1	–	1	–	1	μA
Operating Power Supply Current	I_{CC}	$\overline{CE} = V_{IL}, f = f_{\text{max}}, I_{\text{out}} = 0 \text{ mA}$	–	120	–	115	–	110	–	100	–	90	–	80	mA
		L	–	115	–	110	–	105	–	95	–	85	–	75	mA
Standby Power Supply Current	I_{SB}	$\overline{CE} = V_{IH}, f = f_{\text{max}}$	–	45	–	40	–	30	–	30	–	25	–	25	mA
		L	–	40	–	35	–	25	–	25	–	20	–	20	mA
	I_{SB1}	$\overline{CE} > V_{CC}-0.2\text{V}, f = 0, V_{in} \leq 0.2\text{V or } V_{in} \geq V_{CC}-0.2\text{V}$	–	2.0	–	2.0	–	2.0	–	2.0	–	2.0	–	2.0	mA
		L	–	0.5	–	0.5	–	0.5	–	0.5	–	0.5	–	0.5	mA
Output Voltage	V_{OL}	$I_{OL} = 8 \text{ mA}, V_{CC} = \text{Min}$	–	0.4	–	0.4	–	0.4	–	0.4	–	0.4	–	0.4	V
	V_{OH}	$I_{OH} = -4 \text{ mA}, V_{CC} = \text{Min}$	2.4	–	2.4	–	2.4	–	2.4	–	2.4	–	2.4	–	V

CAPACITANCE²

 $(f = 1 \text{ MHz}, T_a = \text{Room Temperature}, V_{CC} = 5V)$

Parameter	Symbol	Signals	Test Conditions	Max	Unit
Input Capacitance	C_{IN}	A, $\overline{CE}$, $\overline{WE}$, $\overline{OE}$	$V_{in} = 0V$	5	pF
I/O Capacitance	$C_{I/O}$	I/O	$V_{in} = V_{out} = 0V$	7	pF




READ CYCLE^{3,9}

($V_{CC} = 5V \pm 10\%$, $GND = 0V$, $T_a = 0^\circ C$ to $+70^\circ C$)

Parameter	Symbol	-10		-12		-15		-20		-25		-35		Unit	Notes
		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max		
Read Cycle Time	t_{RC}	10	—	12	—	15	—	20	—	25	—	35	—	ns	
Address Access Time	t_{AA}	—	10	—	12	—	15	—	20	—	25	—	35	ns	3
Chip Enable ($\overline{CE}$) Access Time	t_{ACE}	—	10	—	12	—	15	—	20	—	25	—	35	ns	3
Output Enable ($\overline{OE}$) Access Time	t_{OE}	—	3	—	3	—	4	—	5	—	6	—	8	ns	
Output Hold from Address Change	t_{OH}	2	—	3	—	3	—	3	—	3	—	3	—	ns	5
$\overline{CE}$ LOW to Output in Low Z	t_{CLZ}	3	—	3	—	3	—	3	—	3	—	3	—	ns	4, 5
$\overline{CE}$ HIGH to Output in High Z	t_{CHZ}	—	3	—	3	—	4	—	5	—	6	—	8	ns	4, 5
$\overline{OE}$ LOW to Output in Low Z	t_{OLZ}	0	—	0	—	0	—	0	—	0	—	0	—	ns	4, 5
$\overline{OE}$ HIGH to Output in High Z	t_{OHZ}	—	3	—	3	—	4	—	5	—	6	—	8	ns	4, 5
Power Up Time	t_{PU}	0	—	0	—	0	—	0	—	0	—	0	—	ns	4, 5
Power Down Time	t_{PD}	—	10	—	12	—	15	—	20	—	25	—	35	ns	4, 5


TIMING WAVEFORM OF READ CYCLE 1^{3, 6, 7, 9}

(Address Controlled)

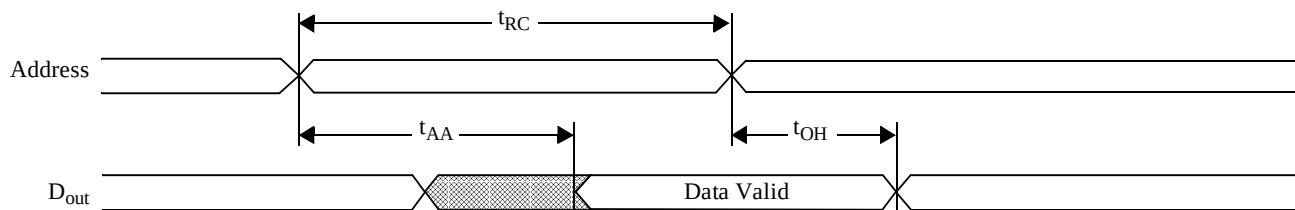

TIMING WAVEFORM OF READ CYCLE 2^{3, 6, 8, 9}

($\overline{CE}$ Controlled)

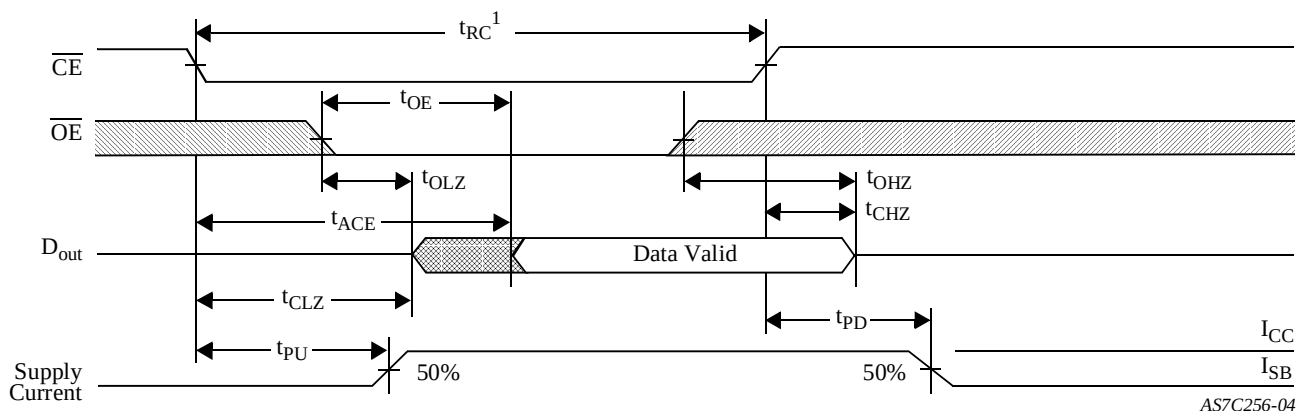

AS7C256-04




WRITE CYCLE ¹¹

(V_{CC} = 5V±10%, GND = 0V, T_a = 0°C to +70°C)

Parameter	Symbol	-10		-12		-15		-20		-25		-35		Unit	Notes
		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max		
Write Cycle Time	t _{WC}	10	–	12	–	15	–	20	–	20	–	30	–	ns	
Chip Enable to Write End	t _{CW}	9	–	10	–	12	–	12	–	15	–	20	–	ns	
Address Setup to Write End	t _{AW}	9	–	10	–	12	–	12	–	15	–	20	–	ns	
Address Setup Time	t _{AS}	0	–	0	–	0	–	0	–	0	–	0	–	ns	
Write Pulse Width	t _{WP}	7	–	8	–	9	–	12	–	15	–	17	–	ns	
Address Hold From End of Write	t _{AH}	0	–	0	–	0	–	0	–	0	–	0	–	ns	
Data Valid to Write End	t _{DW}	6	–	6	–	8	–	10	–	10	–	15	–	ns	
Data Hold Time	t _{DH}	0	–	0	–	0	–	0	–	0	–	0	–	ns	4, 5
Write Enable to Output in High Z	t _{WZ}	–	5	–	5	–	5	–	5	–	5	–	5	ns	4, 5
Output Active from Write End	t _{OW}	3	–	3	–	3	–	3	–	3	–	3	–	ns	4, 5

TIMING WAVEFORM OF WRITE CYCLE 1 ^{10, 11}


(WE Controlled)

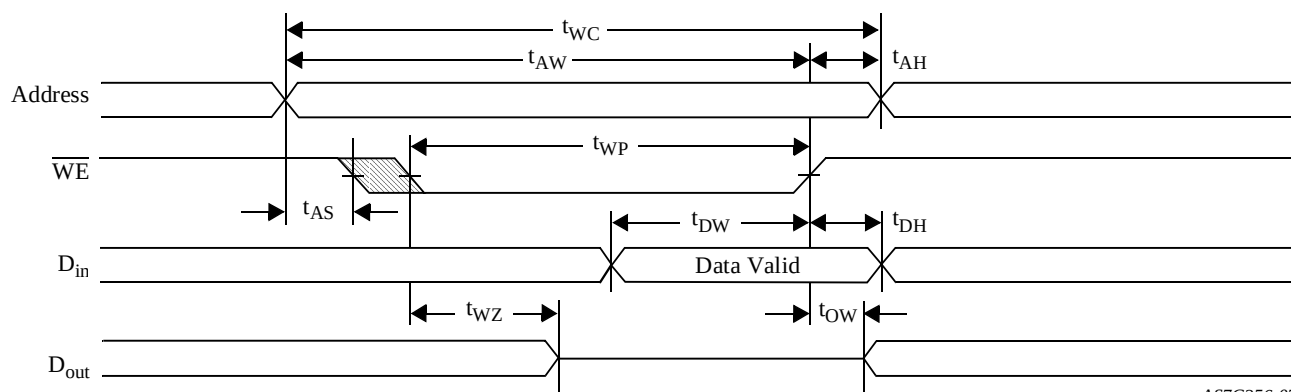

AS7C256-05

TIMING WAVEFORM OF WRITE CYCLE 2 ^{10, 11}

(CE Controlled)

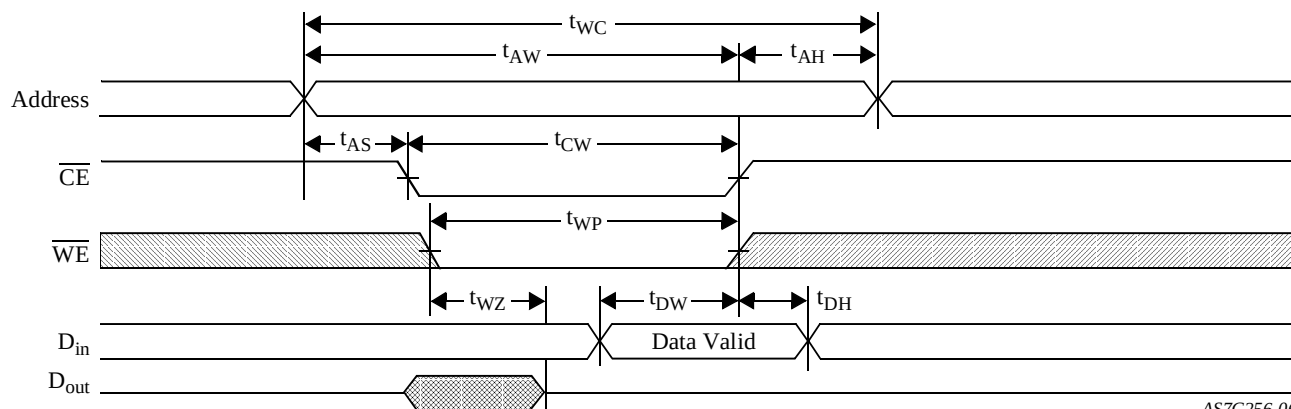

AS7C256-06




DATA RETENTION CHARACTERISTICS

(L Version Only)

Parameter	Symbol	Test Conditions	Min	Max	Unit
V_{CC} for Data Retention	V_{DR}		2.0	–	V
Data Retention Current	I_{CCDR}	$V_{CC} = 2.0V$	–	150	μA
Chip Enable to Data Retention Time	t_{CDR}	$\overline{CE} \geq V_{CC}-0.2V$	0	–	ns
Operation Recovery Time	t_R	$V_{in} \geq V_{CC}-0.2V$ or $V_{in} \leq 0.2V$	t_{RC}	–	ns
Input Leakage Current	$ I_{LI} $		–	1	μA

DATA RETENTION WAVEFORM

(L Version Only)

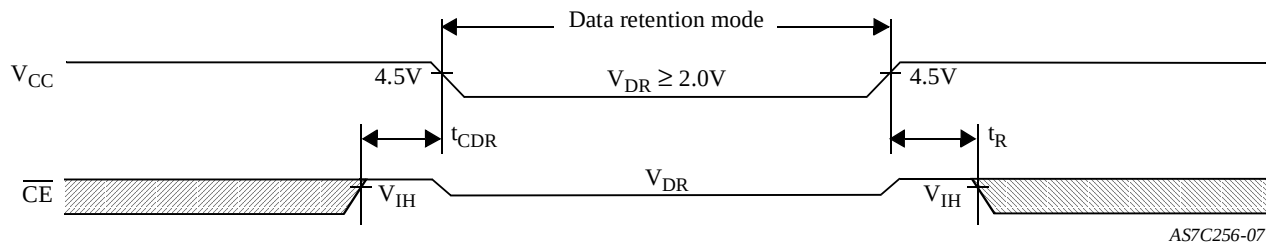

AC TEST CONDITIONS

- Output load: see Figure B, except for t_{CLZ} and t_{CHZ} see Figure C.
- Input pulse level: GND to 3.0V. See Figure A.
- Input rise and fall times: 5 ns. See Figure A.
- Input and output timing reference levels: 1.5V.




Figure A: Input Waveform
AS7C256-08




Figure B: Output Load
AS7C256-09

Thevenin Equivalent:
D_{out} ← 168Ω → +1.728V




Figure C: Output Load for t_{CLZ} , t_{CHZ}
AS7C256-10

*including scope and jig capacitance


NOTES

1. During V_{CC} power-up, a pull-up resistor to V_{CC} on $\overline{CE}$ is required to meet I_{SB} specification.
2. This parameter is sampled and not 100% tested.
3. For test conditions, see AC Test Conditions, Figures A, B, C.
4. t_{CLZ} and t_{CHZ} are specified with $CL = 5pF$ as in Figure C. Transition is measured $\pm 500mV$ from steady-state voltage.
5. This parameter is guaranteed but not tested.
6. $\overline{WE}$ is HIGH for read cycle.
7. $\overline{CE}$ and $\overline{OE}$ are LOW for read cycle.
8. Address valid prior to or coincident with $\overline{CE}$ transition LOW.
9. All read cycle timings are referenced from the last valid address to the first transitioning address.
10. $\overline{CE}$ or $\overline{WE}$ must be HIGH during address transitions.
11. All write cycle timings are referenced from the last valid address to the first transitioning address.




TYPICAL DC AND AC CHARACTERISTICS


Normalized supply current I_{CC} , I_{SB}
vs. supply voltage V_{CC}

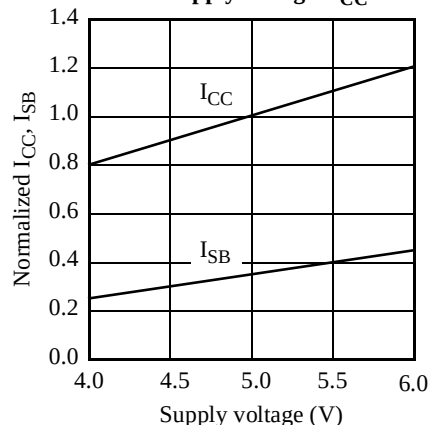


Normalized supply current I_{CC} , I_{SB}
vs. ambient temperature T_a

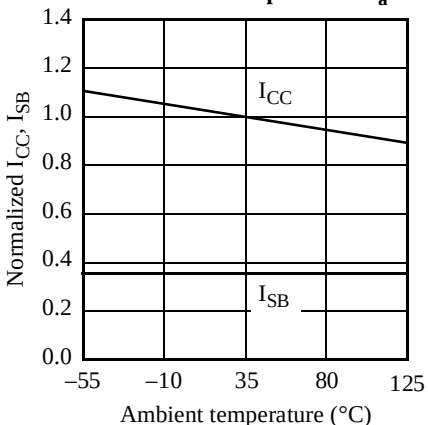


Normalized supply current I_{SB1}
vs. ambient temperature T_a

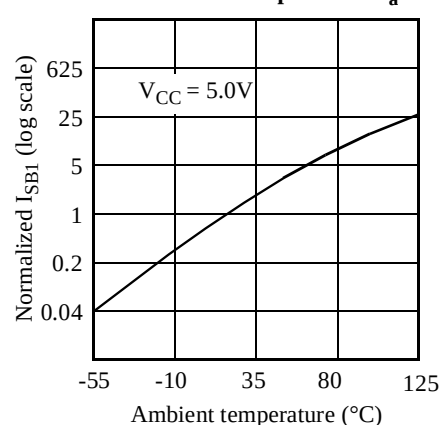


Normalized access time t_{AA}
vs. supply voltage V_{CC}

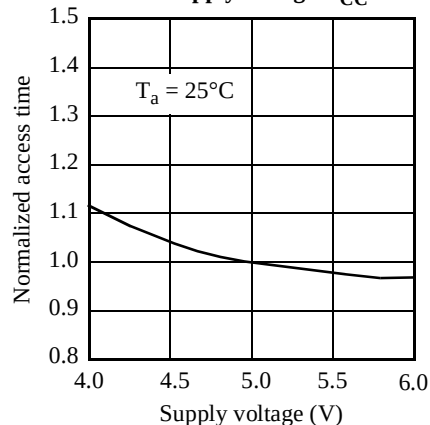


Normalized access time t_{AA}
vs. ambient temperature T_a

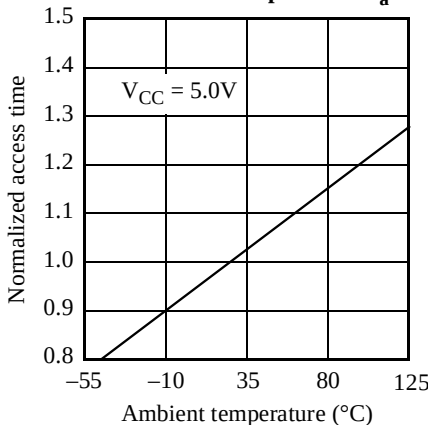


Normalized supply current I_{CC}
vs. cycle frequency $1/t_{RC}$, $1/t_{WC}$

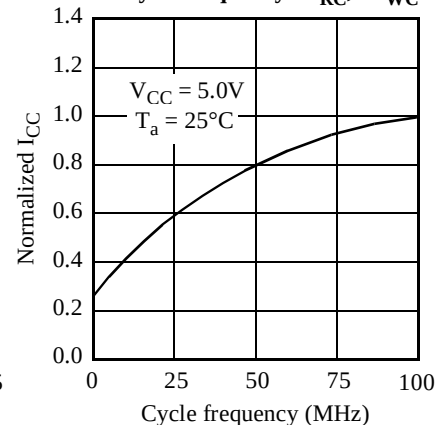


Output source current I_{OH}
vs. output voltage V_{OH}

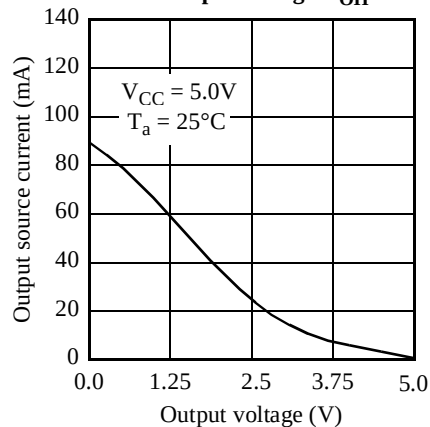

Output sink current I_{OL}
vs. output voltage V_{OL}

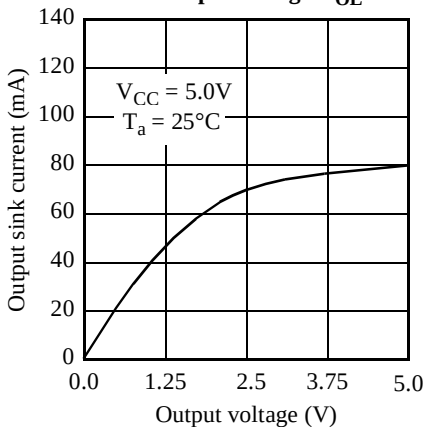

Typical access time change Δt_{AA}
vs. output capacitive loading

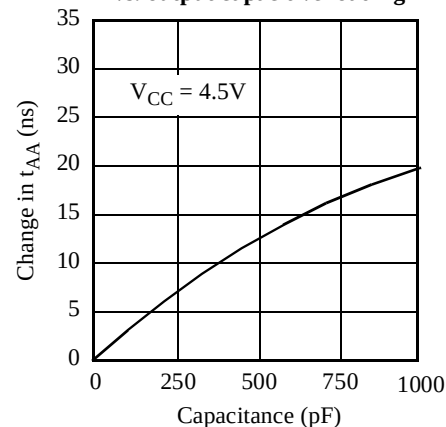



ORDERING CODES

Package / Access Time	10 ns	12 ns	15 ns	20 ns	25 ns	35 ns
Plastic DIP, 300 mil	AS7C256-10PC AS7C256L-10PC	AS7C256-12PC AS7C256L-12PC	AS7C256-15PC AS7C256L-15PC	AS7C256-20PC AS7C256L-20PC	AS7C256-25PC AS7C256L-25PC	AS7C256-35PC AS7C256L-35PC
Plastic SOJ, 300 mil	AS7C256-10JC AS7C256L-10JC	AS7C256-12JC AS7C256L-12JC	AS7C256-15JC AS7C256L-15JC	AS7C256-20JC AS7C256L-20JC	AS7C256-25JC AS7C256L-25JC	AS7C256-35JC AS7C256L-35JC
Plastic SOIC, 330 mil	AS7C256-10SC AS7C256L-10SC	AS7C256-12SC AS7C256L-12SC	AS7C256-15SC AS7C256L-15SC	AS7C256-20SC AS7C256L-20SC	AS7C256-25SC AS7C256L-25SC	AS7C256-35SC AS7C256L-35SC
TSOP 8x13.4	AS7C256-10TC AS7C256L-10TC	AS7C256-12TC AS7C256L-12TC	AS7C256-15TC AS7C256L-15TC	AS7C256-20TC AS7C256L-20TC	AS7C256-25TC AS7C256L-25TC	AS7C256-35TC AS7C256L-35TC

PART NUMBERING SYSTEM

AS7C	256	X	-XX	X	C
SRAM Prefix	Device Number	Blank L	= Standard Power = Low Power	Access Time	Package: P = PDIP 300 mil J = SOJ 300 mil S = SOIC 330 mil T = TSOP 8x14
					Commercial Temperature Range, 0°C to 70 °C

REPRESENTATIVES, DISTRIBUTORS, AND SALES OFFICES

DOMESTIC REPS ALABAMA Concord Component (205) 772-8883 ARIZONA Competitive Technology (602) 265-9224 ARKANSAS Southern States Marketing (214) 238-7500 CALIFORNIA <i>North:</i> Brooks Technical (415) 960-3880 <i>LA Area:</i> Competitive Tech. (714) 450-0170 <i>San Diego:</i> ATS (619) 634-1488 COLORADO Technology Sales (303) 792-8835 CONNECTICUT Kitchen & Kutchin Inc. (203) 239-0212 DELAWARE Vantage Sales (609) 424-6777 FLORIDA Micro-Electronic Comp. <i>Deerfield Beach</i> (305) 426-8944 <i>Tampa</i> (813) 393-5011 GEORGIA Concord Component (404) 416-9597 HAWAII Brooks Technical (415) 960-3880 IDAHO ES/Chase (503) 684-8500 ILLINOIS <i>North:</i> El-Mech (312) 794-9100 <i>South:</i> CenTech (314) 291-4230 INDIANA CC Electro Sales (317) 921-5000 KANSAS CenTech (816) 358-8100 KENTUCKY CC Electro Sales (317) 921-5000 LOUISIANA Southern States Marketing <i>North:</i> (214) 238-7500 <i>South:</i> (713) 868-5180 MAINE Kitchen & Kutchin Inc. (617) 229-2660 MARYLAND Chesapeake Technology (301) 236-0530 MASSACHUSETTS Kitchen & Kutchin Inc. (617) 229-2660 MICHIGAN Enco Group (810) 338-8600 MINNESOTA D. A. Case Associates (612) 831-6777 MISSOURI <i>East:</i> CenTech (314) 291-4230 <i>West:</i> CenTech (816) 358-8100 MISSISSIPPI Concord Component (205) 772-8883 MONTANA ES/Chase (503) 684-8500 NEBRASKA CenTech (816) 358-8100 NEVADA <i>North:</i> Brooks Technical (415) 960-3880 <i>South:</i> Competitive Tech. (602) 265-9224	NEW HAMPSHIRE Kitchen & Kutchin Inc. (617) 229-2660 NEW JERSEY <i>North:</i> ERA Associates (800) 645-5500 <i>South:</i> Vantage Sales (609) 424-6777 NEW MEXICO Competitive Technology (602) 265-9224 NEW YORK NYC: ERA Associates (516) 543-0510 <i>Upstate:</i> Tri-Tech Rochester (716) 385-6500 Birmingham (607) 722-3580 Fishkill (914) 897-5611 NORTH CAROLINA Concord Component (919) 846-3441 NORTH DAKOTA D. A. Case Associates (612) 831-6777 OHIO Midwest Marketing Assoc. Lyndhurst: (216) 381-8575 Dayton: (513) 433-2511 OKLAHOMA Southern States Marketing (214) 238-7500 OREGON ES/Chase (503) 684-8500 PENNSYLVANIA <i>East:</i> Vantage Sales (609) 424-6777 <i>West:</i> Midwest Marketing (216) 381-8575 RHODE ISLAND Kitchen & Kutchin Inc. (617) 229-2660	SOUTH CAROLINA Concord Component (919) 846-3441 SOUTH DAKOTA D. A. Case Associates (612) 831-6777 TENNESSEE Concord Component (205) 772-8883 TEXAS Southern States Marketing <i>Austin:</i> (512) 835-5822 <i>Dallas:</i> (214) 238-7500 <i>Houston:</i> (713) 868-5180 UTAH Charles Fields & Assoc. (801) 299-8228 VERMONT Kitchen & Kutchin Inc. (617) 229-2660 VIRGINIA Chesapeake Technology (301) 236-0530 WASHINGTON ES/Chase (206) 823-9535 WEST VIRGINIA Chesapeake Technology (301) 236-0530 WISCONSIN D. A. Case Associates (612) 831-6777 WYOMING Technology Sales (303) 777-9726	CANADA Tech Trek Ltd. <i>Mississauga:</i> (905) 238-0366 <i>Montreal:</i> (514) 337-7540 <i>Ottawa:</i> (613) 599-8787 <i>Vancouver:</i> (604) 276-8735 <i>Calgary:</i> (403) 291-6866 EUROPE Britcomp Sales Surrey, England +44-1932 347077 +44-1932 346256 Munich, Germany +49-894488496 Athismons, France +33-1-69387678 HONG KONG Eastele Technology +85-2-798-8860 INDIA Priya Electronics, Inc. San Jose, CA USA (408) 954-1866 ISRAEL Eldis Technology +972-9-562-666 JAPAN Actes Engineering Tokyo +81-3-3769-3029 Rohm Co. Ltd. Kyoto +81-75-311-2121 KOREA FM Korea +822-575-9720 Woo Young Tech +822-369-7099 MALAYSIA, SINGAPORE Technology Distr. Pte Ltd. +65-299-7811	PUERTO RICO Micro-Electronic Comp. (809) 746-9897 TAIWAN Asian Specific Tech. +886-2-521-2363 Puteam International +886-2-729-0373	
					DISTRIBUTORS All-American <i>Locations Nationwide</i> <i>Headquarters:</i> (305) 621-8282 Axis Components Sunnyvale, CA (408) 522-9595 Axis Components Irvine, CA (714) 459-5510 Future Electronics <i>Locations Worldwide</i> <i>Headquarters:</i> (514) 594-7710 Interface Electronics Hopkinton, MA (800) 632-7792 (508) 435-0100
					SALES OFFICES HEADQUARTERS Alliance Semiconductor San Jose, CA (408) 383-4900 NORTHEAST AREA Alliance Semiconductor Boston, MA (617) 239-8127
					TECHNICAL CENTER TAIWAN Alliance Semiconductor +886-2-723-9944

Alliance Semiconductor reserves the right to make changes in this data sheet at any time to improve design and supply the best product possible. Alliance Semiconductor cannot assume responsibility for circuits shown or represent that they are free from patent infringement. Alliance products are not authorized for use as critical components in life support devices or systems without the express written approval of the president of Alliance. The Alliance logo is a trademark of Alliance Semiconductor Corporation. All other trademarks are property of their respective holders.

ALLIANCE SEMICONDUCTOR
3099 North First Street San Jose, CA 95134
(408) 383-4900 Fax (408) 383-4999