

Number of contacts 9, 15, 25, 37
UL recognized

Working current 7.5 A max.

Test voltage $U_{r.m.s.}$ 1 kV

Contact resistance $\leq 10 \text{ m}\Omega$
Insulation resistance $\geq 1000 \text{ M}\Omega$

Temperature range $-55^\circ\text{C} \dots +125^\circ\text{C}$
Heat deflection temperature
limit according to DIN 53 461 $+255^\circ\text{C}$

Terminations
a) Solder buckets max. 0.8 mm^2
b) Solder pins $\varnothing 0.6 \text{ mm}$ for
P.C.B. holes $\varnothing 0.8/1 \text{ mm}$
c) Solder pins, angled 90°
 $\varnothing 0.6 \text{ mm}$ for P.C.B. holes
 $\varnothing 0.8/1 \text{ mm}$

Materials
Insulation PCT, glass-fibre filled,
flame retardant acc. to
UL 94-V0
Colour: natural


Contacts Copper alloy
Male and female contacts
are turned

Contact surface
Contact zone Selectively plated according
to performance level

Performance level Performance level 2, as per
CECC 75 301-802,
250 mating cycles,
4 days 4 mixed gas test –
IEC 60 512


Metal shell Steel

Contact arrangement
View from termination side

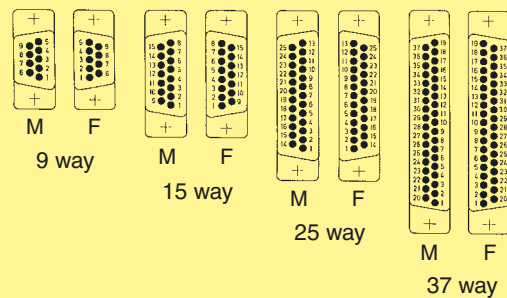

M = Male connector
F = Female connector

Mating conditions as per CECC 75 301

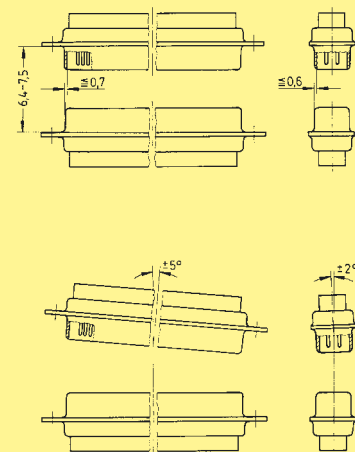

Attenuation characteristics for standard capacitance values

Min. insertion loss

Capacitance [pF] ¹⁾	Attenuation (in dB) vs. frequency [MHz]						
	1	5	10	50	100	500	1000
47						30	35
470			1	11	16	35	32
1000		1	3	12	24	38	30
3900	1	6	11	25	35	38	32


¹⁾ Capacitance tolerance = $\pm 20\%$ (For other capacitor values see pages 05.30 ff).

Measured in 50 Ω system according to MIL-STD-220, no load.

Working voltage: 100 V max for standard capacitance values – higher working voltages are available as specific.

Dielectric withstanding voltage: 250 V DC max. – higher dielectric withstanding voltages are available as specific (see page 05.30)

Typical insertion loss for different filters (measured)

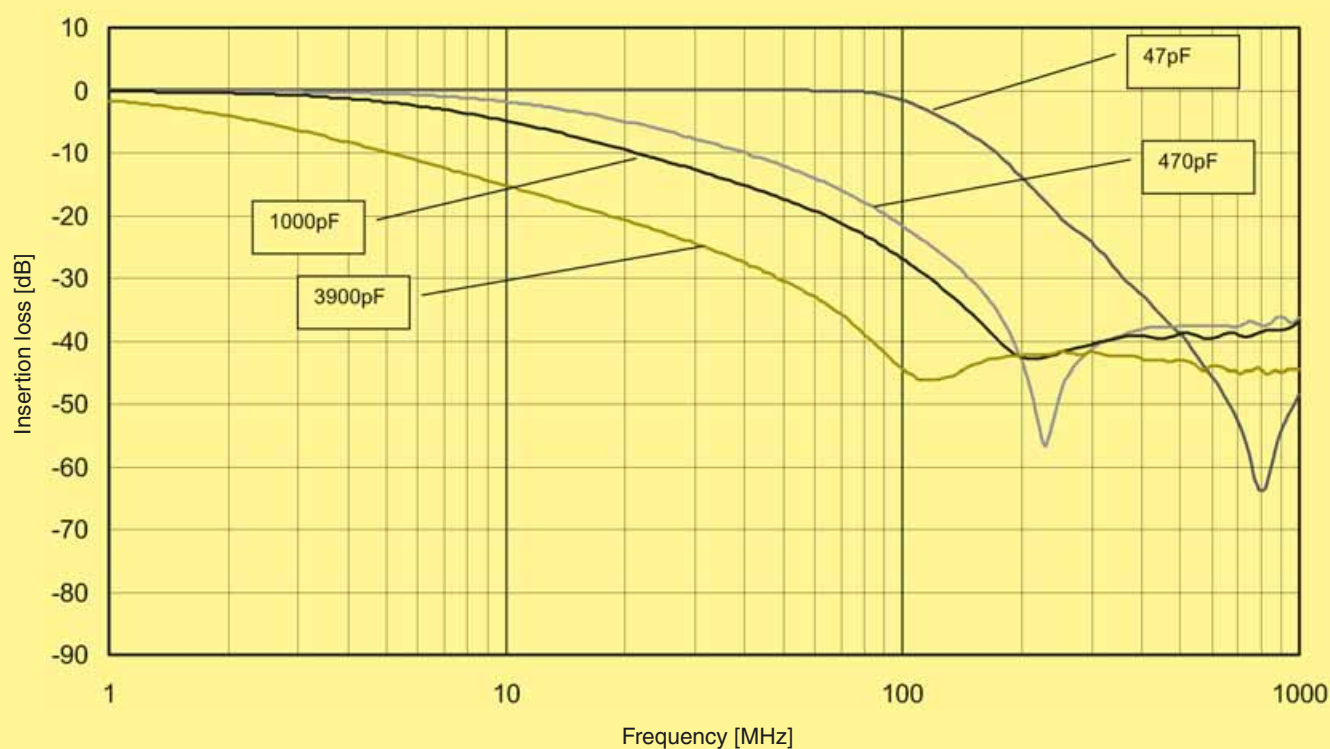

Number of contacts

9–37



Solder buckets, through hole

Identification	No. of contacts	Part No.	
		male connectors	female connectors
Connectors with 47 pF C filter			
	9	09 64 121 7210	09 64 111 7210
	15	09 64 221 7210	09 64 211 7210
	25	09 64 321 7210	09 64 311 7210
	37	09 64 421 7210	09 64 411 7210
Connectors with 470 pF C filter			
	9	09 64 121 7220	09 64 111 7220
	15	09 64 221 7220	09 64 211 7220
	25	09 64 321 7220	09 64 311 7220
	37	09 64 421 7220	09 64 411 7220
Connectors with 1000 pF C filter			
	9	09 64 121 7230	09 64 111 7230
	15	09 64 221 7230	09 64 211 7230
	25	09 64 321 7230	09 64 311 7230
	37	09 64 421 7230	09 64 411 7230
Connectors with 3900 pF C filter			
	9	09 64 121 7240	09 64 111 7240
	15	09 64 221 7240	09 64 211 7240
	25	09 64 321 7240	09 64 311 7240
	37	09 64 421 7240	09 64 411 7240

Number of contacts

9–37






Solder buckets, through hole

Identification

Drawing

Dimensions in mm

Male connector

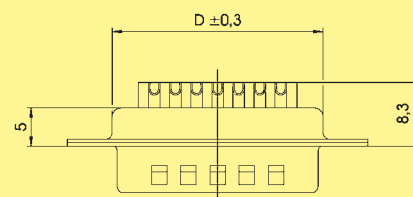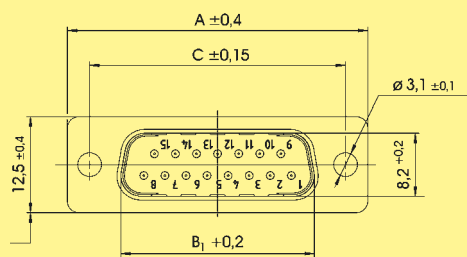

No. of contacts	A	B ₁	B ₂	C	D
9	30.8	16.9	16.4	25.00	19.3
15	39.1	25.2	24.7	33.30	27.5
25	53.0	38.9	38.5	47.04	41.3
37	69.3	55.3	54.9	63.50	57.7

Female connector

