

4 BIT DIGITAL ATTENUATOR

TAD5007

Available in:
DP-5, 24 Pin DIP Package
and Connectorized Housings

- 10 - 150 MHz
- 45 dB Attenuation Range
- Integral TTL Driver
- Operating Temp. -55°C to +85°C
- Screening to the tables of MIL-STD-883 available

Maximum Ratings


Ambient Operating Temperature -55°C to + 100 °C
Storage Temperature -65°C to + 125 °C
Case Temperature + 125 °C
DC Voltage + 6 Volts
Continuous RF Input Power +30 dBm

Specifications

CHARACTERISTIC	TYPICAL Ta = 25 °C	MIN/MAX Ta = -55 °C to +85 °C
Frequency	10 - 150 MHz	10 - 150 MHz
Insertion Loss (dB)	2.5	3.3 Max.
Attenuation Range (dB)	3 - 45	3 - 45
Steps (dB)	3,6,12,24	3,6,12,24
Accuracy	±0.2 dB ±0.5%	±0.3 dB ±1% Max.
VSWR	1.4:1	1.65:1 Max.
Switching Speed (µsec)	10	15 Max.
Transients (V)	0.5	1.0 Max.
DC Bias	VDC +5 mA 25	+5 30 Max.

Note: Care should always be taken to effectively grounding the case of each unit


Pin Layout

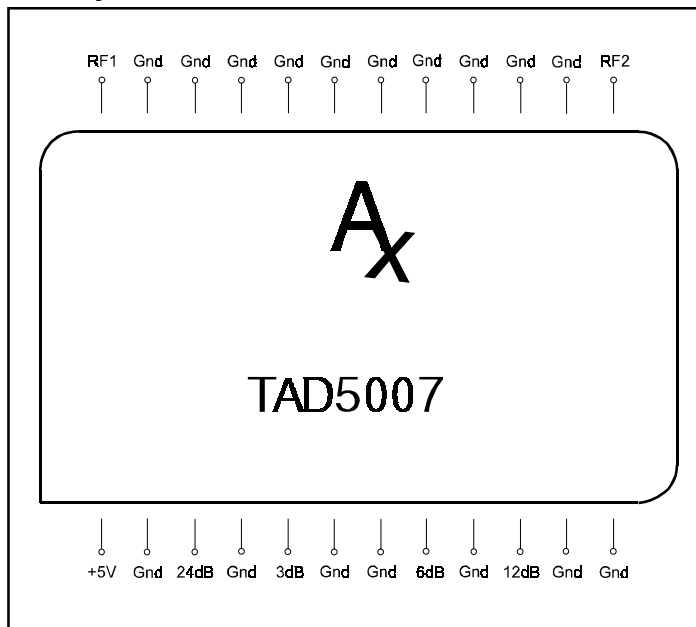

Truth Table

Control Input 4 Line TTL	Attenuator Setting
1	Attenuate
0	Thru

Typical Performance Data

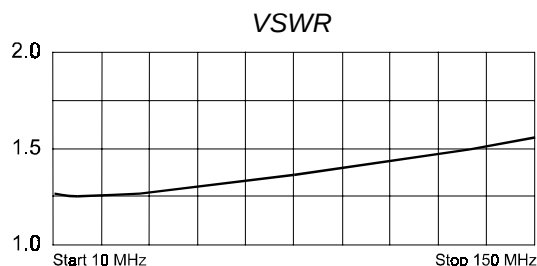

Amplifonix

2707 Black Lake Place, Philadelphia, PA 19154

TEL 215-464-4000 • • • • FAX 215-464-4001