


SIGNAL LINE FILTER (1 COIL/2 LINES)

DATA LINE PROTECTION APPLICATIONS
FILTER COMMON AND DIFFERENTIAL MODE NOISE
EMI / RFI SUPPRESSION
FREQUENCY RANGE OF 1-100MHZ
DIL CONSTRUCTION FOR EASY INSTALLATION
HIGH CURRENT AND VOLTAGE ISOLATION


Electrical Specifications at 25°C

Part Number	Turns Ratio	OCL (μ H min.)	L_L (μ H max.)	DCR (m Ω)	Cw/w (pF max)	HI-POT V_{RMS}	I MAX. mA
F-2106G	1:1	25	.2	100	15	500	100



TYPICAL ATTENUATION

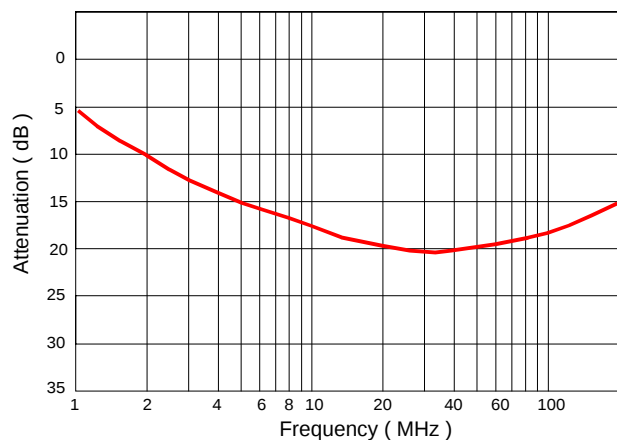

SCHEMATIC DIAGRAM



PHYSICAL DIMENSIONS
in inches (mm)

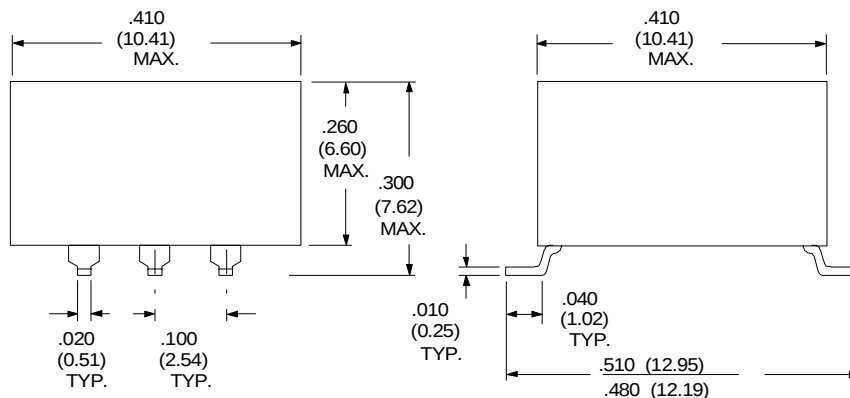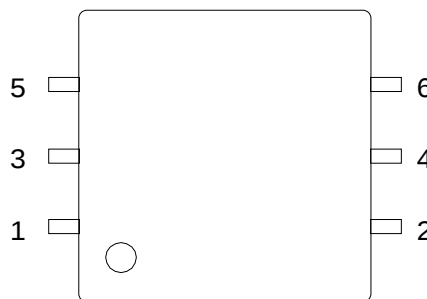

Specifications subject to change without notice.

F-2106 g- 9/97