

二段式コーナーハンドル
TWO-STEP CORNER HANDLESFA-635
亜鉛合金製

蒸気を逃がす=火傷防止

PAT.PEND.

キーNo.0200
Key

特徴 Feature

- 一度レバーを引くと扉が約12mm開き、再度レバーを引くことで全開します。蒸気を逃す必要がある場合に最適です。
- 握り部にビニールコーティングを施した耐熱タイプです。(100°Cまで)
- 受座は取付け位置、締めの微調整が可能です。
- 左右兼用型
- Pulling the lever once opens the door approx. 12mm and pulling the lever again opens the door fully. (suitable for the cases moisture needs to be removed)
- Grip is a vinyl-coated, heat-resistant type (Up to 100°C).
- Catch installing position and tightening margin can be adjusted.
- For both left-hand and right-hand use.

- 仕様
- 材質: 亜鉛合金 (ZDC)
 - 表面仕上: クロムめっき (MZCr)
 - 鍵番号: 0200
 - 付属品: キー2本・受座
- 用途
- 厨房用機器・医療用機器・試験機などの中型・軽量大型扉用
- 納期備考
- 取付け際、本体・受座のセンター位置マークが合っていることを確認してください。
 - 取付け後、動作確認を行ってください。2段階操作ができない場合は本体と受座の調整を再度行ってください。



Specifications

- Material: Zinc alloy (ZDC)
- Finish: Chrome plating (MZCr)

Key No.: 0200

- Accessories: Two keys and catch

Specific use

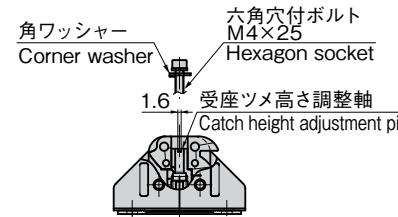
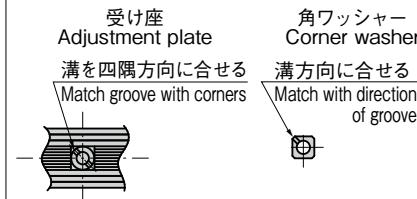
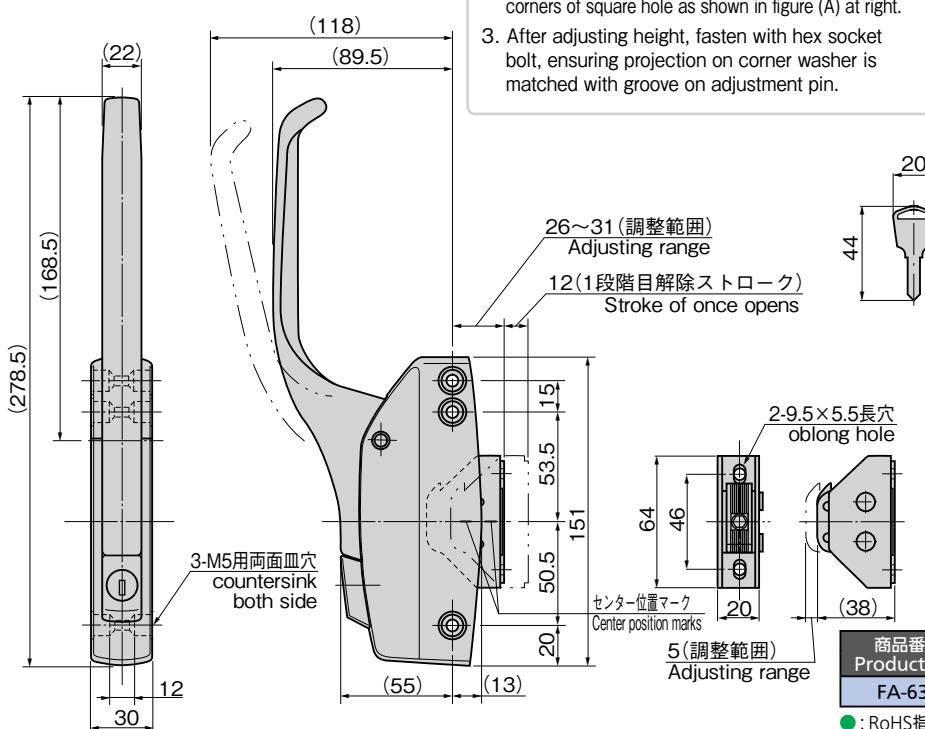
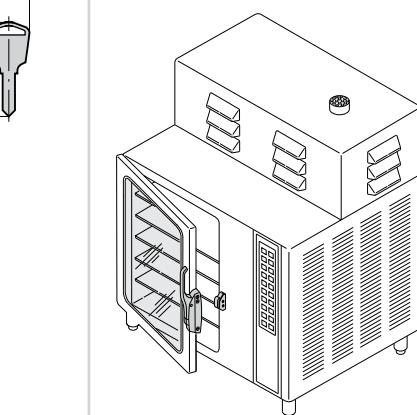
- Medium and lightweight large-sized doors for kitchen, medical, inspection and other equipment

Remarks

- When installing, check that the main body and catch center marks are adjusted.



- On completion of installation, check that the handle operates properly. If two steps do not function properly, adjust the main body and catch again.

(A) 拡大図
(A) Enlarged view使用例
Example of application

商品番号 Product No.	RoHS 2D	CAD 60624	コード Code	単価 Price	量販価格 Bulk Price 数量 Quantity	単価 Price
FA-635	●			¥9,200	5個~	¥8,840

●: RoHS指令対応品
※大量のご注文は更にお安くなります。

▲: RoHS指令に対応可能です。