

Clock Oscillators (SMD)




K50-3C Series (3.3V)

K50 SERIES



DIMENSIONS

millimeters (inches)

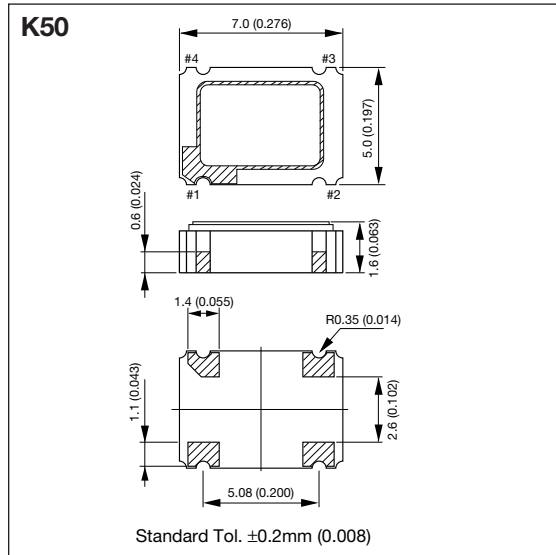

PIN CONNECTION

Pin #	Function
1	CONTROL
2	CASE GND
3	OUTPUT
4	+V _{CC}

ENABLE/DISABLE

Pin #1	Pin #3
"H" or Open	Oscillation
"L"	High Impedance or Oscillation Stop

SPECIFICATIONS

Items	Code	Rating	Unit	Remarks
Output Frequency	F _{OUT}	8 to 80	MHz	—
Frequency Tolerance	$\Delta F/F$	± 100 , ± 50	ppm	Over all conditions
Aging	$\Delta F/F$	± 5	ppm/y	@ 25°C
Operating Temperature	T _{OPR}	-10 to 70	°C	—
Storage Temperature	T _{STR}	-55 to 125	°C	—
Supply Voltage	V _{CC}	3.3 $\pm$ 0.3	V	—
Supply Current	I _{CC}	25 max.	mA	Loaded @ 80MHz
Disable/Stand by Current	I _{DE/IST}	10 max.	μ A	8 $\leq$ F $\leq$ 32MHz
		15 max.	mA	32<F $\leq$ 50MHz
		10 max.	μ A	50<F $\leq$ 80MHz
		—	—	0.5V _{CC} DC Level
Duty Ratio	SYM	40 to 60	%	—
Output 0 Level	V _{OL}	0.1V _{CC} max.	V	I _{OL} = 8mA
Output 1 Level	V _{OH}	0.9V _{CC} min.	V	I _{OH} = -8mA
Rise/Fall Time	T _R , T _F	10 max.	nsec	0.1V _{CC} -0.9V _{CC}
Load Capacitance	C _L	15 max.	pF	—
Enable/Disable Time	—	5 max.	msec	8 $\leq$ F $\leq$ 32MHz
		150 max.	nsec	32<F $\leq$ 50MHz
		5 max.	msec	50<F $\leq$ 80MHz
Input Voltage Low	V _{IL}	0.3V _{CC} max.	V	—
Input Voltage High	V _{IH}	0.7V _{CC} min.	V	—
Start-up Time	ST	10 max.	mS	Minimum Operating Voltage to be 0sec

*Please contact us for inquiries about Extend Operating Temperature Range (-40 to +85°C), available frequencies, other condition.

FEATURES

- High reliable SMD ceramic package
- Frequency range = 8MHz to 80MHz
- Frequency tolerance = $\pm 100\text{ppm}$, $\pm 50\text{ppm}$
- Tristate output inhibit

APPLICATIONS

- PDAs
- Switches
- Routers
- Servers

HOW TO ORDER

K50 - 3C	1	E	40.0000M	R
Series	Tolerance		Frequency (MHz)	Packaging
	1 = $\pm 100\text{ppm}$ 0 = $\pm 50\text{ppm}$			R = Tape and reel, 1,000 pcs/reel
				Enable/Disable Function
				E = with function (STD)
				Duty Ratio
				$\square$ = 40% to 60% (STD) S = 45% to 55% (f>20MHz)


Clock Oscillators

K30/K50 Series




Kyocera has a wide range of clock oscillators with frequency and package size to match the various customer requirements.


K50/K30 HC SERIES TEST CIRCUIT

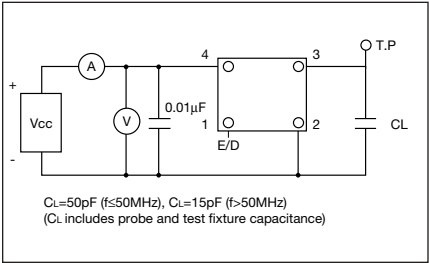


K50/K30 3C SERIES TEST CIRCUIT

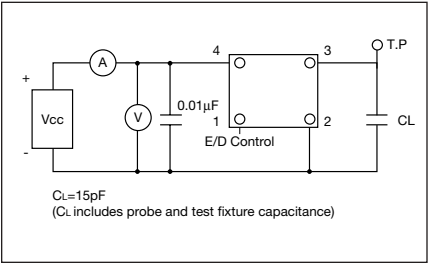

K50H 3C SERIES TEST CIRCUIT

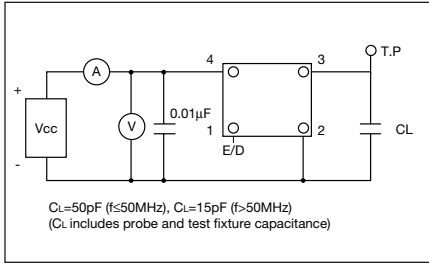

OUTPUT WAVE FORM FOR ALL SERIES

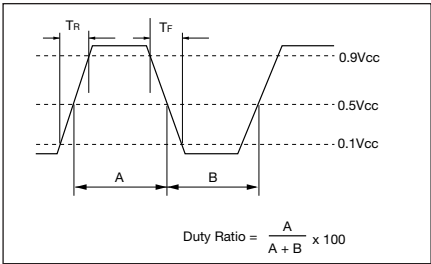

SPECIFICATIONS

Type	Frequency Range (MHz)	Load	Drive Level	Duty Ratio	Features
K50-HC	8 to 68	$C_L=50\text{pF}$ (max.) ($f \leq 50\text{MHz}$)	CMOS $V_{OH}=0.9V_{CC}$ $V_{OL}=0.1V_{CC}$	45/55% (0.5Vcc)	1. IR Reflowable 2. Mini-SMD 3. Tristate Output, Enable/Disable Function F>50MHz $C_L=15\text{pF}$
K50-3C	8 to 80	$C_L=15\text{pF}$ (max.)	CMOS $V_{OH}=0.9V_{CC}$ $V_{OL}=0.1V_{CC}$	40/60% (0.5Vcc)	1. 3.3V Available 2. IR Reflowable 3. Mini-SMD 4. Tristate Output, Enable/Disable Function
K50H-3C	50 to 160	$C_L=15\text{pF}$ (max.)	CMOS $V_{OH}=0.9V_{CC}$ $V_{OL}=0.1V_{CC}$	45/55% (0.5Vcc)	1. 3.3V Available 2. IR Reflowable 3. Mini-SMD 4. Tristate Output, Enable/Disable Function
K30-HC	8 to 50	$C_L=50\text{pF}$ (max.) ($f \leq 50\text{MHz}$)	CMOS $V_{OH}=0.9V_{CC}$ $V_{OL}=0.1V_{CC}$	45/55% (0.5Vcc)	1. IR Reflowable 2. Mini-SMD 3. Tristate Output, Enable/Disable Function
K30-3C	8 to 67	$C_L=15\text{pF}$ (max.)	CMOS $V_{OH}=0.9V_{CC}$ $V_{OL}=0.1V_{CC}$	40/60% (0.5Vcc)	1. 3.3V Available 2. IR Reflowable 3. Mini-SMD 4. Tristate Output, Enable/Disable Function

Temp
°C

255
±5

150
±10

10sec. max

peak 260°C max

Over 230°C
30 to 40sec.

150 to 180°C
90 to 120sec.

Time - sec.

Technical drawing of a Reel, showing three views: front view, side view, and end view.

Front View: A circular reel with four spokes. The overall diameter is $\phi 180$ (7.087). The distance from the center to the tip of a spoke is $R125$ (4.921). A rectangular feature is located at the bottom center, with a label "Part Number Indication" pointing to it.

Side View: Shows the profile of the reel. The total height is 19.5 (0.768). The distance from the base to the center of the reel is 60 (2.362). The base width is 17.0 (0.669).

End View: Shows the circular end of the reel. The diameter is $\phi 130$ (5.12). The distance from the center to the edge of the reel is 21.0 (0.827). The distance from the center to the base of the reel is 2.0 (0.079).

Diagram of a KYOCERA 32.0000 crystal oscillator package. The package is a square with rounded corners and a central rectangular area containing the text "KYOCERA", "32.0000", "1B", and "W01". The package has four pins labeled 1, 2, 3, and 4. Pin 1 is at the bottom left, Pin 2 at the bottom right, Pin 3 at the top right, and Pin 4 at the top left. A label "PIN #1 Indication" points to the bottom left corner. A label "Tolerance" points to the "1B" marking. A label "Series" points to the "W01" marking. A label "Lot No." points to the bottom right corner. A label "Output Frequency" points to the "32.0000" marking.

*1 $\pm 100\text{ppm}$
 $0 \pm 50\text{ppm}$
 $S \pm 30\text{ppm}$
 $U \pm 25\text{ppm}$

*2 B = K50-HC
 L = K50-3C-E
 M = K50-3C-SE
 D = K50-CL
 H = K50H-3C-SE

Technical drawing of a Carrier Tape, showing dimensions in inches (mm).

Top View Dimensions:

- Overall Width: 16.0 (6.30)
- Overall Length: 5.40 (0.213)
- Distance between mounting holes: 8.0 (0.315)
- Distance between mounting holes: 4.0 (0.157)
- Distance from edge to mounting hole center: 1.5 (0.059)
- Radius of mounting hole: $\phi 1.55 (0.061)R$
- Distance from edge to mounting hole center: 1.75 (0.069)
- Distance from edge to mounting hole center: 7.5 (0.295)

Side View Dimensions:

- Overall Height: 7.4 (0.291)
- Distance from edge to mounting hole center: 2.2 (0.087)
- Distance from edge to mounting hole center: 0.3 (0.012)

1,000pcs/Reel