

## 74ABT16652

### 16-Bit Transceivers and Registers with 3-STATE Outputs

#### General Description

The ABT16652 consists of sixteen bus transceiver circuits with D-type flip-flops, and control circuitry arranged for multiplexed transmission of data directly from the input bus or from the internal registers. Each byte has separate control inputs which can be shorted together for full 16-bit operation. Data on the A or B bus will be clocked into the registers as the appropriate clock pin goes to HIGH logic level. Output Enable pins (OEAB,  $\overline{\text{OEBA}}$ ) are provided to control the transceiver function.

#### Features

- Independent registers for A and B buses
- Multiplexed real-time and stored data
- Separate control logic for each byte
- A and B output sink capability of 64 mA, source capability of 32 mA
- Guaranteed output skew
- High impedance glitch free bus loading during entire power up and power down cycle
- Nondestructive hot insertion capability

#### Ordering Code:


| Order Number   | Package Number | Package Description                                                         |
|----------------|----------------|-----------------------------------------------------------------------------|
| 74ABT16652CSSC | MS56A          | 56-Lead Shrink Small Outline Package (SSOP), JEDEC MO-118, 0.300" Wide      |
| 74ABT16652CMTD | MTD56          | 56-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 6.1mm Wide |

Devices also available in Tape and Reel. Specify by appending the suffix letter "X" to the ordering code.

#### Pin Descriptions

| Pin Names                                      | Descriptions                               |
|------------------------------------------------|--------------------------------------------|
| A <sub>0</sub> –A <sub>16</sub>                | Data Register A Inputs/<br>3-STATE Outputs |
| B <sub>0</sub> –B <sub>16</sub>                | Data Register B Inputs/<br>3-STATE Outputs |
| CPAB <sub>n</sub> , CPBA <sub>n</sub>          | Clock Pulse Inputs                         |
| SAB <sub>n</sub> , SBA <sub>n</sub>            | Select Inputs                              |
| OEAB <sub>n</sub> , $\overline{\text{OEBA}}_n$ | Output Enable Inputs                       |

#### Connection Diagram

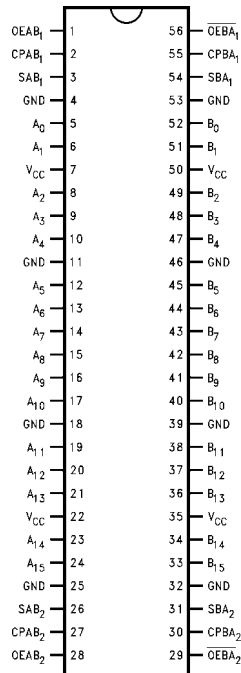

74ABT16652 16-Bit Transceivers and Registers with 3-STATE Outputs

## Functional Description

In the transceiver mode, data present at the HIGH impedance port may be stored in either the A or B register or both.

The select (SAB<sub>n</sub>, SBA<sub>n</sub>) controls can multiplex stored and real-time.

The examples in *Figure 1* demonstrate the four fundamental bus-management functions that can be performed with the ABT16652.

Data on the A or B data bus, or both can be stored in the internal D flip-flop by LOW to HIGH transitions at the appropriate Clock Inputs (CPAB<sub>n</sub>, CPBA<sub>n</sub>) regardless of the Select or Output Enable Inputs. When SAB and SBA are in the real time transfer mode, it is also possible to store data without using the internal D flip-flops by simultaneously enabling OEAB<sub>n</sub> and  $\overline{\text{OEBA}}_n$ . In this configuration each Output reinforces its Input. Thus when all other data sources to the two sets of bus lines are in a HIGH impedance state, each set of bus lines will remain at its last state.

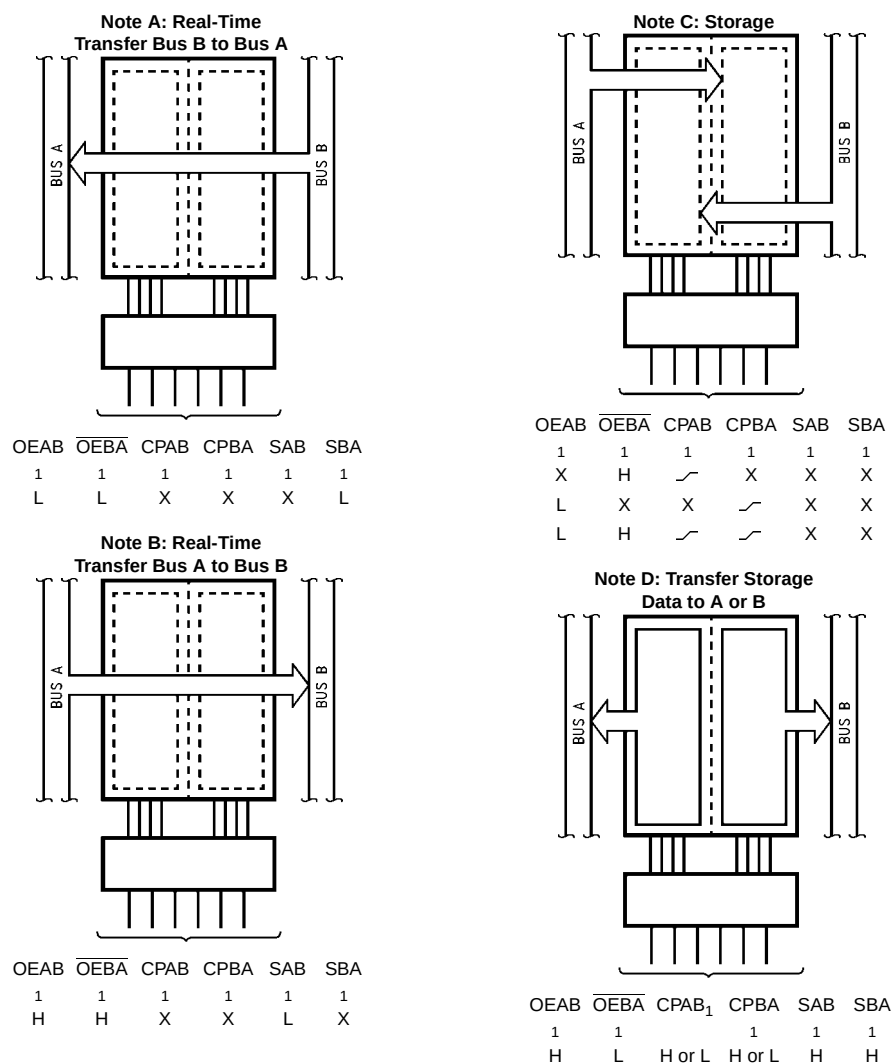


FIGURE 1.

## Function Table

| Inputs            |                   |                   |                   |                  |                  | Inputs/Outputs (Note 1)            |                                    | Operating Mode                                       |
|-------------------|-------------------|-------------------|-------------------|------------------|------------------|------------------------------------|------------------------------------|------------------------------------------------------|
| OEAB <sub>1</sub> | OEBA <sub>1</sub> | CPAB <sub>1</sub> | CPBA <sub>1</sub> | SAB <sub>1</sub> | SBA <sub>1</sub> | A <sub>0</sub> thru A <sub>7</sub> | B <sub>0</sub> thru B <sub>7</sub> |                                                      |
| L                 | H                 | H or L            | H or L            | X                | X                | Input                              | Input                              | Isolation                                            |
| L                 | H                 | ↗                 | ↗                 | X                | X                |                                    |                                    | Store A and B Data                                   |
| X                 | H                 | ↗                 | H or L            | X                | X                | Input                              | Not Specified                      | Store A, Hold B                                      |
| H                 | H                 | ↗                 | ↗                 | X                | X                | Input                              | Output                             | Store A in Both Registers                            |
| L                 | X                 | H or L            | ↗                 | X                | X                | Not Specified                      | Input                              | Hold A, Store B                                      |
| L                 | L                 | ↗                 | ↗                 | X                | X                | Output                             | Input                              | Store B in Both Registers                            |
| L                 | L                 | X                 | X                 | X                | L                | Output                             | Input                              | Real-Time B Data to A Bus                            |
| L                 | L                 | X                 | H or L            | X                | H                |                                    |                                    | Store B Data to A Bus                                |
| H                 | H                 | X                 | X                 | L                | X                | Input                              | Output                             | Real-Time A Data to B Bus                            |
| H                 | H                 | H or L            | X                 | H                | X                |                                    |                                    | Stored A Data to B Bus                               |
| H                 | L                 | H or L            | H or L            | H                | H                | Output                             | Output                             | Stored A Data to B Bus and<br>Stored B Data to A Bus |

H = HIGH Voltage Level


L = LOW Voltage Level

X = Immaterial

↗ = LOW to HIGH Clock Transition

**Note 1:** The data output functions may be enabled or disabled by various signals at OEAB or OEBA inputs. Data input functions are always enabled, i.e., data at the bus pins will be stored on every LOW to HIGH transition on the clock inputs. This also applies to data I/O (A and B: 8–15) and #2 control pins.

## Logic Diagrams

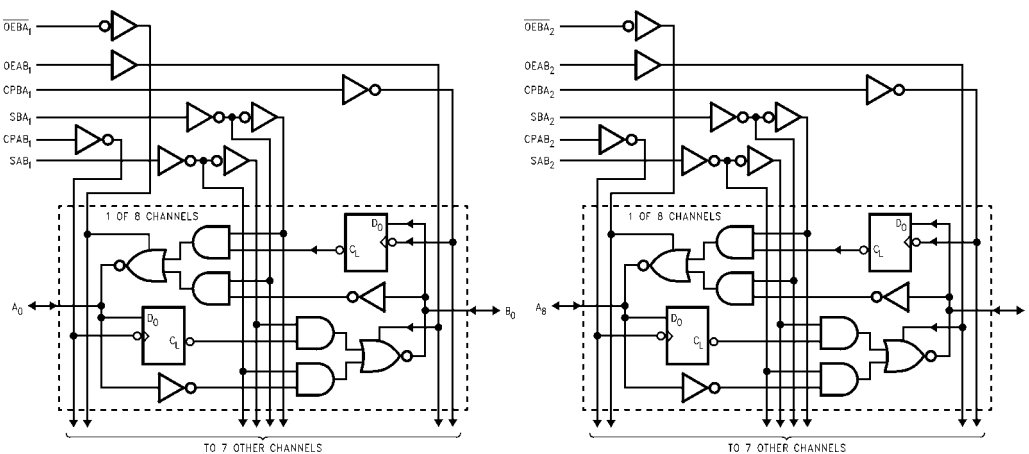

Please note that these diagrams are provided only for the understanding of logic operations and should not be used to estimate propagation delays.

**Absolute Maximum Ratings**(Note 2)

Over Voltage Latchup (I/O)

10V

|                                                                 |                                      |
|-----------------------------------------------------------------|--------------------------------------|
| Storage Temperature                                             | –65°C to +150°C                      |
| Ambient Temperature under Bias                                  | –55°C to +125°C                      |
| Junction Temperature under Bias                                 | –55°C to +150°C                      |
| V <sub>CC</sub> Pin Potential to Ground Pin                     | –0.5V to +7.0V                       |
| Input Voltage (Note 3)                                          | –0.5V to +7.0V                       |
| Input Current (Note 3)                                          | –30 mA to +5.0 mA                    |
| Voltage Applied to Any Output in the Disable or Power-Off State | –0.5V to +5.5V                       |
| in the HIGH State                                               | –0.5V to V <sub>CC</sub>             |
| Current Applied to Output in LOW State (Max)                    | twice the rated I <sub>OL</sub> (mA) |
| DC Latchup Source Current                                       | –500 mA                              |

**Recommended Operating Conditions**

|                                                 |                |
|-------------------------------------------------|----------------|
| Free Air Ambient Temperature                    | –40°C to +85°C |
| Supply Voltage                                  | +4.5V to +5.5V |
| Minimum Input Edge Rate ( $\Delta V/\Delta t$ ) |                |
| Data Input                                      | 50 mV/ns       |
| Enable Input                                    | 20 mV/ns       |
| Clock Input                                     | 100 mV/ns      |

**Note 2:** Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

**Note 3:** Either voltage limit or current limit is sufficient to protect inputs.

**DC Electrical Characteristics**

| Symbol                             | Parameter                                | Min        | Typ | Max      | Units   | V <sub>CC</sub> | Conditions                                                                                                                                  |
|------------------------------------|------------------------------------------|------------|-----|----------|---------|-----------------|---------------------------------------------------------------------------------------------------------------------------------------------|
| V <sub>IH</sub>                    | Input HIGH Voltage                       |            |     |          | V       |                 | Recognized HIGH Signal                                                                                                                      |
| V <sub>IL</sub>                    | Input LOW Voltage                        |            |     | 0.8      | V       |                 | Recognized LOW Signal                                                                                                                       |
| V <sub>CD</sub>                    | Input Clamp Diode Voltage                |            |     | –1.2     | V       | Min             | I <sub>IN</sub> = –18 mA (Non I/O Pins)                                                                                                     |
| V <sub>OH</sub>                    | Output HIGH Voltage                      | 2.5<br>2.0 |     |          | V       | Min             | I <sub>OH</sub> = –3 mA, (A <sub>n</sub> , B <sub>n</sub> )<br>I <sub>OH</sub> = –32 mA, (A <sub>n</sub> , B <sub>n</sub> )                 |
| V <sub>OL</sub>                    | Output LOW Voltage                       |            |     | 0.55     | V       | Min             | I <sub>OL</sub> = 64 mA, (A <sub>n</sub> , B <sub>n</sub> )                                                                                 |
| V <sub>ID</sub>                    | Input Leakage Test                       |            |     |          | V       | 0.0             | I <sub>ID</sub> = 1.9 $\mu$ A, (Non-I/O Pins)<br>All Other Pins Grounded                                                                    |
| I <sub>IH</sub>                    | Input HIGH Current                       |            |     | 1<br>1   | $\mu$ A | Max             | V <sub>IN</sub> = 2.7V (Non-I/O Pins) (Note 4)<br>V <sub>IN</sub> = V <sub>CC</sub> (Non-I/O Pins)                                          |
| I <sub>BVI</sub>                   | Input HIGH Current Breakdown Test        |            |     | 7        | $\mu$ A | Max             | V <sub>IN</sub> = 7.0V (Non-I/O Pins)                                                                                                       |
| I <sub>BVIT</sub>                  | Input HIGH Current Breakdown Test (I/O)  |            |     | 100      | $\mu$ A | Max             | V <sub>IN</sub> = 5.5V (A <sub>n</sub> , B <sub>n</sub> )                                                                                   |
| I <sub>IL</sub>                    | Input LOW Current                        |            |     | –1<br>–1 | $\mu$ A | Max             | V <sub>IN</sub> = 0.5V (Non-I/O Pins) (Note 4)<br>V <sub>IN</sub> = 0.0V (Non-I/O Pins)                                                     |
| I <sub>IH</sub> + I <sub>OZH</sub> | Output Leakage Current                   |            |     | 10       | $\mu$ A | 0V–5.5V         | V <sub>OUT</sub> = 2.7V (A <sub>n</sub> , B <sub>n</sub> );<br>OEAB <sub>n</sub> = GND and OEBA <sub>n</sub> = 2.0V                         |
| I <sub>IL</sub> + I <sub>OZL</sub> | Output Leakage Current                   |            |     | –10      | $\mu$ A | 0V–5.5V         | V <sub>OUT</sub> = 0.5V (A <sub>n</sub> , B <sub>n</sub> );<br>OEAB <sub>n</sub> = GND and OEBA <sub>n</sub> = 2.0V                         |
| I <sub>OS</sub>                    | Output Short-Circuit Current             |            |     | –275     | mA      | Max             | V <sub>OUT</sub> = 0V (A <sub>n</sub> , B <sub>n</sub> )                                                                                    |
| I <sub>CEX</sub>                   | Output HIGH Leakage Current              |            |     | 50       | $\mu$ A | Max             | V <sub>OUT</sub> = V <sub>CC</sub> (A <sub>n</sub> , B <sub>n</sub> )                                                                       |
| I <sub>ZZ</sub>                    | Bus Drainage Test                        |            |     | 100      | $\mu$ A | 0.0V            | V <sub>OUT</sub> = 5.5V (A <sub>n</sub> , B <sub>n</sub> ); All Others GND                                                                  |
| I <sub>CCH</sub>                   | Power Supply Current                     |            |     | 1.0      | mA      | Max             | All Outputs HIGH                                                                                                                            |
| I <sub>CCL</sub>                   | Power Supply Current                     |            |     | 60       | mA      | Max             | All Outputs LOW                                                                                                                             |
| I <sub>CCZ</sub>                   | Power Supply Current                     |            |     | 1.0      | mA      | Max             | Outputs 3-STATE;<br>All Others at V <sub>CC</sub> or GND                                                                                    |
| I <sub>CCT</sub>                   | Additional I <sub>CC</sub> /Input        |            |     | 2.5      | mA      | Max             | V <sub>I</sub> = V <sub>CC</sub> – 2.1V<br>All Others at V <sub>CC</sub> or GND                                                             |
| I <sub>CCD</sub>                   | Dynamic I <sub>CC</sub> No Load (Note 4) |            |     | 0.23     | mA/MHz  | Max             | Outputs Open<br>OEAB <sub>n</sub> , OEBA <sub>n</sub> and SEL = GND<br>Non-I/O = GND or V <sub>CC</sub><br>One bit toggling, 50% duty cycle |

**Note 4:** Guaranteed but not tested.

**DC Electrical Characteristics**

(SSOP Package)

| Symbol           | Parameter                                    | Min  | Typ  | Max | Units | V <sub>CC</sub> | Conditions<br>C <sub>L</sub> = 50 pF, R <sub>L</sub> = 500Ω |
|------------------|----------------------------------------------|------|------|-----|-------|-----------------|-------------------------------------------------------------|
| V <sub>OLP</sub> | Quiet Output Maximum Dynamic V <sub>OL</sub> |      | 0.7  | 1.2 | V     | 5.0             | T <sub>A</sub> = 25°C (Note 5)                              |
| V <sub>OLV</sub> | Quiet Output Minimum Dynamic V <sub>OL</sub> | -1.4 | -1.0 |     | V     | 5.0             | T <sub>A</sub> = 25°C (Note 5)                              |
| V <sub>OHV</sub> | Minimum HIGH Level Dynamic Output Voltage    | 2.5  | 3.0  |     | V     | 5.0             | T <sub>A</sub> = 25°C (Note 6)                              |
| V <sub>IHD</sub> | Minimum HIGH Level Dynamic Input Voltage     | 2.0  | 1.6  |     | V     | 5.0             | T <sub>A</sub> = 25°C (Note 7)                              |
| V <sub>ILD</sub> | Maximum LOW Level Dynamic Input Voltage      |      | 1.2  | 0.8 | V     | 5.0             | T <sub>A</sub> = 25°C (Note 7)                              |

**Note 5:** Max number of outputs defined as (n). n – 1 data inputs are driven 0V to 3V. One output at LOW. Guaranteed, but not tested.**Note 6:** Max number of outputs defined as (n). n – 1 data inputs are driven 0V to 3V. One output HIGH. Guaranteed, but not tested.**Note 7:** Max number of data inputs (n) switching. n – 1 inputs switching 0V to 3V. Input-under-test switching: 3V to threshold (V<sub>ILD</sub>), 0V to threshold (V<sub>IHD</sub>). Guaranteed, but not tested.**AC Electrical Characteristics**

(SSOP Package)

| Symbol           | Parameter                                                                     | T <sub>A</sub> = +25°C<br>V <sub>CC</sub> = +5.0V<br>C <sub>L</sub> = 50 pF |     |     | T <sub>A</sub> = -40°C to +85°C<br>V <sub>CC</sub> = 4.5V–5.5V<br>C <sub>L</sub> = 50 pF |     | Units |
|------------------|-------------------------------------------------------------------------------|-----------------------------------------------------------------------------|-----|-----|------------------------------------------------------------------------------------------|-----|-------|
|                  |                                                                               | Min                                                                         | Typ | Max | Min                                                                                      | Max |       |
| t <sub>PLH</sub> | Propagation Delay                                                             | 1.5                                                                         | 3.0 | 4.9 | 1.5                                                                                      | 4.9 | ns    |
| t <sub>PHL</sub> | Clock to Bus                                                                  | 1.5                                                                         | 3.4 | 4.9 | 1.5                                                                                      | 4.9 |       |
| t <sub>PLH</sub> | Propagation Delay                                                             | 1.5                                                                         | 2.6 | 4.5 | 1.5                                                                                      | 4.5 | ns    |
| t <sub>PHL</sub> | Bus to Bus                                                                    | 1.5                                                                         | 3.0 | 4.5 | 1.5                                                                                      | 4.5 |       |
| t <sub>PLH</sub> | Propagation Delay                                                             | 1.5                                                                         | 2.9 | 5.0 | 1.5                                                                                      | 5.0 | ns    |
| t <sub>PHL</sub> | SBA <sub>n</sub> or SAB <sub>n</sub><br>to A <sub>n</sub> to B <sub>n</sub>   | 1.5                                                                         | 3.2 | 5.0 | 1.5                                                                                      | 5.0 |       |
| t <sub>PZH</sub> | Enable Time                                                                   | 1.5                                                                         | 2.8 | 5.5 | 1.5                                                                                      | 5.5 | ns    |
| t <sub>PZL</sub> | OEBA <sub>n</sub> or OEAB <sub>n</sub><br>to A <sub>n</sub> or B <sub>n</sub> | 1.5                                                                         | 3.0 | 5.5 | 1.5                                                                                      | 5.5 |       |
| t <sub>PHZ</sub> | Disable Time                                                                  | 1.5                                                                         | 3.9 | 5.9 | 1.5                                                                                      | 5.9 | ns    |
| t <sub>PLZ</sub> | OEBA <sub>n</sub> or OEAB <sub>n</sub><br>to A <sub>n</sub> or B <sub>n</sub> | 1.5                                                                         | 3.3 | 5.9 | 1.5                                                                                      | 5.9 |       |

**AC Operating Requirements**

| Symbol                                   | Parameter                               | T <sub>A</sub> = +25°C<br>V <sub>CC</sub> = +5.0V<br>C <sub>L</sub> = 50 pF |     |     | T <sub>A</sub> = -40°C to +85°C<br>V <sub>CC</sub> = 4.5V–5.5V<br>C <sub>L</sub> = 50 pF |     | Units |
|------------------------------------------|-----------------------------------------|-----------------------------------------------------------------------------|-----|-----|------------------------------------------------------------------------------------------|-----|-------|
|                                          |                                         | Min                                                                         | Typ | Max | Min                                                                                      | Max |       |
| f <sub>max</sub>                         | Max Clock Frequency                     |                                                                             | 200 |     |                                                                                          |     | MHz   |
| t <sub>S</sub> (H)<br>t <sub>S</sub> (L) | Setup Time, HIGH<br>or LOW Bus to Clock | 2.0                                                                         |     |     | 2.0                                                                                      |     | ns    |
| t <sub>H</sub> (H)<br>t <sub>H</sub> (L) | Hold Time, HIGH<br>or LOW Bus to Clock  | 1.0                                                                         |     |     | 1.0                                                                                      |     | ns    |
| t <sub>W</sub> (H)<br>t <sub>W</sub> (L) | Pulse Width,<br>HIGH or LOW             | 3.0                                                                         |     |     | 3.0                                                                                      |     | ns    |

## Extended AC Electrical Characteristics

(SSOP Package)

| Symbol           | Parameter                                                                              | T <sub>A</sub> = -40°C to +85°C<br>V <sub>CC</sub> = 4.5V–5.5V<br>C <sub>L</sub> = 50 pF<br>16 Outputs Switching<br>(Note 8) |     | T <sub>A</sub> = -40°C to +85°C<br>V <sub>CC</sub> = 4.5V–5.5V<br>C <sub>L</sub> = 250 pF<br>1 Output Switching<br>(Note 9) |     | T <sub>A</sub> = -40°C to +85°C<br>V <sub>CC</sub> = 4.5V–5.5V<br>C <sub>L</sub> = 250 pF<br>16 Outputs Switching<br>(Note 10) |      | Units |
|------------------|----------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------|-----|-----------------------------------------------------------------------------------------------------------------------------|-----|--------------------------------------------------------------------------------------------------------------------------------|------|-------|
|                  |                                                                                        | Min                                                                                                                          | Max | Min                                                                                                                         | Max | Min                                                                                                                            | Max  |       |
| t <sub>PLH</sub> | Propagation Delay                                                                      | 1.5                                                                                                                          | 5.8 | 2.0                                                                                                                         | 7.5 | 2.5                                                                                                                            | 10.0 | ns    |
| t <sub>PHL</sub> | Clock to Bus                                                                           | 1.5                                                                                                                          | 5.8 | 2.0                                                                                                                         | 7.5 | 2.5                                                                                                                            | 10.0 |       |
| t <sub>PLH</sub> | Propagation Delay                                                                      | 1.5                                                                                                                          | 6.5 | 2.0                                                                                                                         | 7.0 | 2.5                                                                                                                            | 9.5  | ns    |
| t <sub>PHL</sub> | Bus to Bus                                                                             | 1.5                                                                                                                          | 6.5 | 2.0                                                                                                                         | 7.0 | 2.5                                                                                                                            | 9.5  |       |
| t <sub>PLH</sub> | Propagation Delay                                                                      | 1.5                                                                                                                          | 6.0 | 2.0                                                                                                                         | 7.5 | 2.5                                                                                                                            | 10.0 | ns    |
| t <sub>PHL</sub> | SBA or SAB to<br>A <sub>n</sub> or B <sub>n</sub>                                      | 1.5                                                                                                                          | 6.0 | 2.0                                                                                                                         | 7.5 | 2.5                                                                                                                            | 10.0 |       |
| t <sub>PZH</sub> | Output Enable Time                                                                     | 1.5                                                                                                                          | 6.0 | 2.0                                                                                                                         | 8.0 | 2.5                                                                                                                            | 10.5 | ns    |
| t <sub>PZL</sub> | $\overline{\text{OEBA}}_n$ or OEAB <sub>n</sub> to<br>A <sub>n</sub> or B <sub>n</sub> | 1.5                                                                                                                          | 6.0 | 2.0                                                                                                                         | 8.0 | 2.5                                                                                                                            | 10.5 |       |
| t <sub>PHZ</sub> | Output Disable Time                                                                    | 1.5                                                                                                                          | 6.0 | (Note 11)                                                                                                                   |     | (Note 11)                                                                                                                      |      | ns    |
| t <sub>PLZ</sub> | $\overline{\text{OEBA}}$ or OEAB to<br>A <sub>n</sub> or B <sub>n</sub>                | 1.5                                                                                                                          | 6.0 |                                                                                                                             |     |                                                                                                                                |      |       |

**Note 8:** This specification is guaranteed but not tested. The limits apply to propagation delays for all paths described switching in phase (i.e., all LOW-to-HIGH, HIGH-to-LOW, etc.).

**Note 9:** This specification is guaranteed but not tested. The limits represent propagation delay with 250 pF load capacitors in place of the 50 pF load capacitors in the standard AC load. This specification pertains to single output switching only.

**Note 10:** This specification is guaranteed but not tested. The limits represent propagation delays for all paths described switching in phase (i.e., all LOW-to-HIGH, HIGH-to-LOW, etc.) with 250 pF load capacitors in place of the 50 pF load capacitors in the standard AC load.

**Note 11:** The 3-STATE delay times are dominated by the RC network (500Ω, 250 pF) on the output and has been excluded from the datasheet.

## Skew (Note 12)

(SSOP Package)

| Symbol                         | Parameter                                  | T <sub>A</sub> = -40°C to +85°C<br>V <sub>CC</sub> = 4.5V-5.5V<br>C <sub>L</sub> = 50 pF<br>16 Outputs Switching<br>(Note 12) | T <sub>A</sub> = -40°C to +85°C<br>V <sub>CC</sub> = 4.5V-5.5V<br>C <sub>L</sub> = 250 pF<br>16 Outputs Switching<br>(Note 13) | Units |
|--------------------------------|--------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|-------|
|                                |                                            | Max                                                                                                                           | Max                                                                                                                            |       |
| t <sub>OSHL</sub><br>(Note 14) | Pin to Pin Skew<br>HL Transitions          | 2.0                                                                                                                           | 2.5                                                                                                                            | ns    |
| t <sub>OSLH</sub><br>(Note 14) | Pin to Pin Skew<br>LH Transitions          | 2.0                                                                                                                           | 2.5                                                                                                                            | ns    |
| t <sub>PS</sub><br>(Note 15)   | Duty Cycle<br>LH-HL Skew                   | 2.0                                                                                                                           | 2.5                                                                                                                            |       |
| t <sub>OST</sub><br>(Note 14)  | Pin to Pin Skew<br>LH/HL Transitions       | 2.8                                                                                                                           | 3.0                                                                                                                            | ns    |
| t <sub>PV</sub><br>(Note 16)   | Device to Device Skew<br>LH/HL Transitions | 3.5                                                                                                                           | 4.0                                                                                                                            | ns    |

**Note 12:** This specification is guaranteed but not tested. The limits apply to propagation delays for all paths described switching in phase (i.e., all LOW-to-HIGH, HIGH-to-LOW, etc.).

**Note 13:** This specification is guaranteed but not tested. The limits represent propagation delays with 250 pF load capacitors in place of the 50 pF load capacitors in the standard AC load.

**Note 14:** Skew is defined as the absolute value of the difference between the actual propagation delays for any two separate outputs of the same device. The specification applies to any outputs switching HIGH to LOW (t<sub>OSHL</sub>), LOW to HIGH (t<sub>OSLH</sub>), or any combination switching LOW to HIGH and/or HIGH to LOW (t<sub>OST</sub>). This specification is guaranteed but not tested.

**Note 15:** This describes the difference between the delay of the LOW-to-HIGH and the HIGH-to-LOW transition on the same pin. It is measured across all the outputs (drivers) on the same chip, the worst (largest delta) number is the guaranteed specification. This specification is guaranteed but not tested.


**Note 16:** Propagation delay variation for a given set of conditions (i.e., temperature and V<sub>CC</sub>) from device to device. This specification is guaranteed but not tested.

## Capacitance

| Symbol              | Parameter         | Typ  | Units | Conditions<br>( $T_A = 25^\circ\text{C}$ ) |
|---------------------|-------------------|------|-------|--------------------------------------------|
| $C_{IN}$            | Input Capacitance | 5.0  | pF    | $V_{CC} = 0\text{V}$ (non I/O pins)        |
| $C_{I/O}$ (Note 17) | I/O Capacitance   | 11.0 | pF    | $V_{CC} = 5.0\text{V}$ ( $A_n, B_n$ )      |

**Note 17:**  $C_{I/O}$  is measured at frequency,  $f = 1\text{ MHz}$ , per MIL-STD-883, Method 3012.

## AC Loading



\*Includes jig and probe capacitance

FIGURE 2. Standard AC Test Load

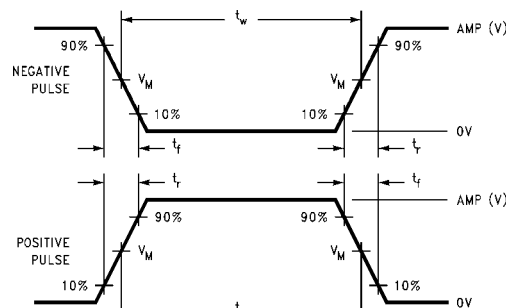


FIGURE 3. Test Input Signal Levels

### Input Pulse Requirement

| Amplitude | Rep. Rate | $t_w$  | $t_r$  | $t_f$  |
|-----------|-----------|--------|--------|--------|
| 3.0V      | 1 MHz     | 500 ns | 2.5 ns | 2.5 ns |

FIGURE 4. Test input Signal Requirements

## AC Waveforms

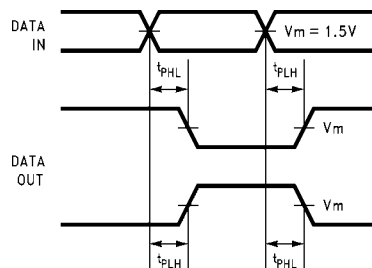


FIGURE 5. Propagation Delay Waveforms for Inverting and Non-Inverting Functions

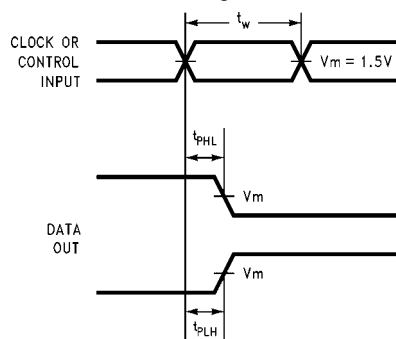


FIGURE 6. Propagation Delay, Pulse Width Waveforms

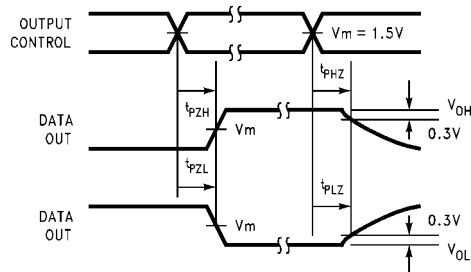


FIGURE 7. 3-STATE Output HIGH and LOW Enable and Disable Times


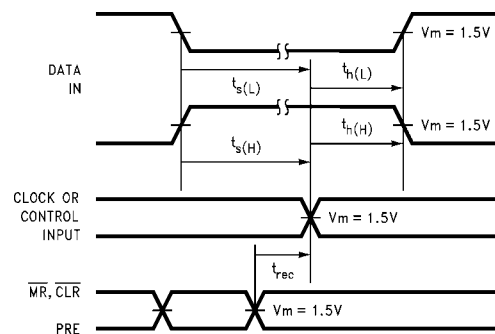


FIGURE 8. Setup Time, Hold Time and Recovery Time Waveforms


# Physical Dimensions inches (millimeters) unless otherwise noted



**56-Lead Shrink Small Outline Package (SSOP), JEDEC MO-118, 0.300" Wide  
Package Number MS56A**

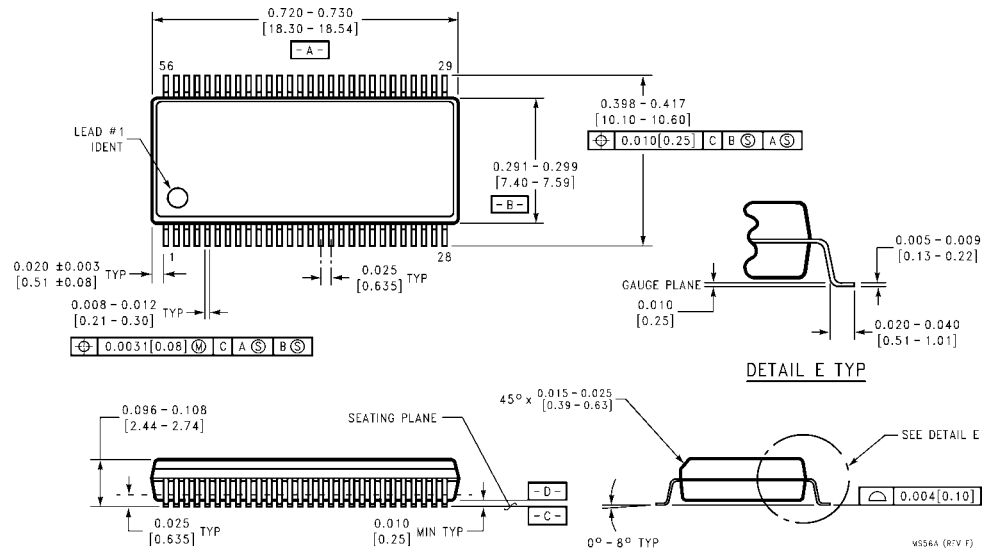

# Physical Dimensions inches (millimeters) unless otherwise noted (Continued)

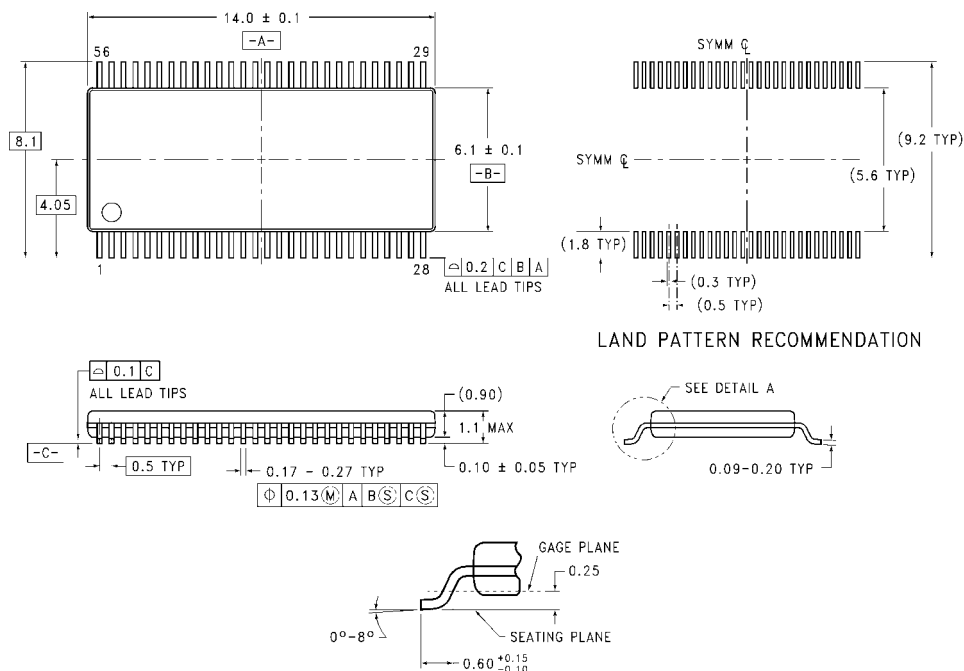

56-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 6.1mm Wide  
Package Number MTD56

## LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

[www.fairchildsemi.com](http://www.fairchildsemi.com)