



SF11SG THRU SF18SG

1.0 AMP. Glass Passivated Super Fast Rectifiers



Voltage Range
50 to 600 Volts
Current
1.0 Ampere


Features

- ✧ Low forward voltage drop
- ✧ High current capability
- ✧ High reliability
- ✧ High surge current capability

Mechanical Data

- ✧ Case: Molded plastic
- ✧ Epoxy: UL 94V-O rate flame retardant
- ✧ Lead: Axial leads, solderable per MIL-STD-202, Method 208 guaranteed
- ✧ Polarity: Color band denotes cathode end
- ✧ High temperature soldering guaranteed: 250°C/10 seconds/.375" (9.5mm) lead lengths at 5 lbs., (2.3kg) tension
- ✧ Mounting position: Any
- ✧ Weight: 0.22 gram

A-405

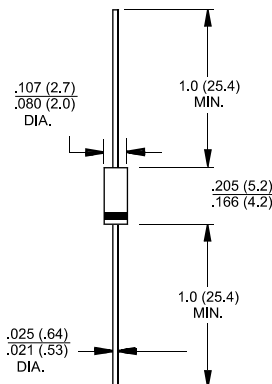

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Type Number	SF 11SG	SF 12SG	SF 13SG	SF 14SG	SF 15SG	SF 16SG	SF 17SG	SF 18SG	Units
Maximum Recurrent Peak Reverse Voltage	50	100	150	200	300	400	500	600	V
Maximum RMS Voltage	35	70	105	140	210	280	350	420	V
Maximum DC Blocking Voltage	50	100	150	200	300	400	500	600	V
Maximum Average Forward Rectified Current .375 (9.5mm) Lead Length @T _A = 55°C	1.0								A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	30								A
Maximum Instantaneous Forward Voltage @ 1.0A	0.95				1.3		1.7		V
Maximum DC Reverse Current @ T _A =25°C at Rated DC Blocking Voltage @ T _A =125°C	5.0 100								uA uA
Maximum Reverse Recovery Time (Note 1)	35								nS
Typical Junction Capacitance (Note 2)	50				25				pF
Operating Temperature Range T _J	-65 to +150								°C
Storage Temperature Range T _{STG}	-65 to +150								°C

Notes: 1. Reverse Recovery Test Conditions: I_F=0.5A, I_R=1.0A, I_{RR}=0.25A

2. Measured at 1 MHz and Applied Reverse Voltage of 4.0 V D.C.

RATINGS AND CHARACTERISTIC CURVES (SF11SG THRU SF18SG)

FIG.1- REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

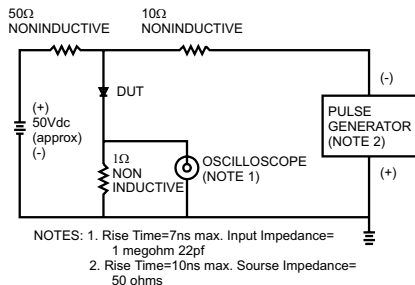


FIG.2- MAXIMUM AVERAGE FORWARD CURRENT DERATING




FIG.3- TYPICAL REVERSE CHARACTERISTICS

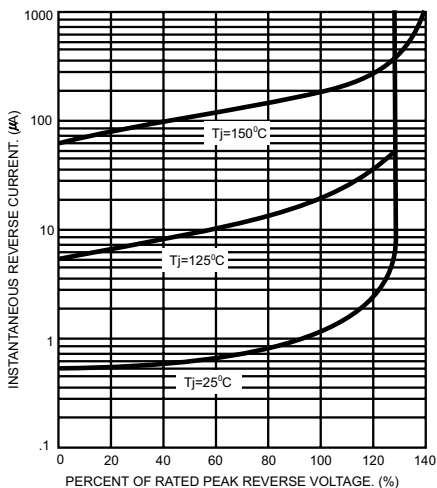


FIG.4- TYPICAL FORWARD CHARACTERISTICS

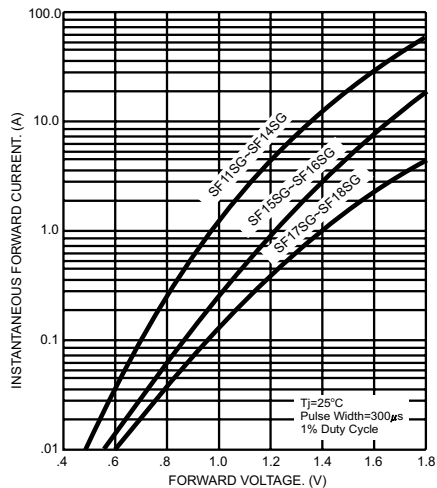


FIG.5- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

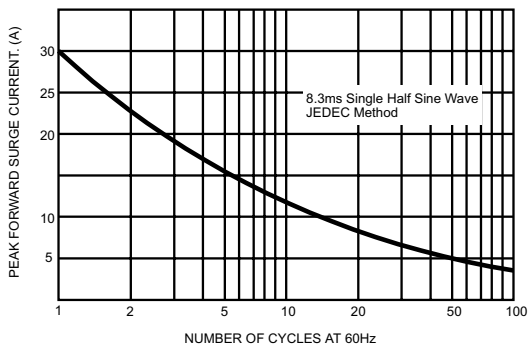


FIG.6- TYPICAL JUNCTION CAPACITANCE

