


TYPES SN54LS594, SN54LS599, SN74LS594, SN74LS599 8-BIT SHIFT REGISTERS WITH OUTPUT LATCHES

D2747, JUNE 1983 — REVISED DECEMBER 1983

- **8-Bit Serial-In, Parallel-Out Shift Registers with Storage**
- **Choice of Output Configurations:**
'LS594 ... Buffered
'LS599 ... Open-Collector
- **Guaranteed Shift Frequency:**
DC to 20 MHz
- **Independent Direct-Overriding Clears on Shift and Storage Registers**
- **Independent Clocks for Both Shift and Storage Registers**


SN54LS594, SN54LS599 ... J OR W PACKAGE
SN74LS594, SN74LS599 ... J OR N PACKAGE

(TOP VIEW)



SN54LS594, SN54LS599 ... FK PACKAGE
SN74LS594, SN74LS599 ... FN PACKAGE

(TOP VIEW)




description

These devices each contain an 8-bit D-type storage register. The storage register has buffered ('LS594) or open-collector ('LS599) outputs. Separate clocks and direct-overriding clears are provided on both the shift and storage registers. A shift output (Q_H) is provided for cascading purposes.

Both the shift register and the storage register clocks are positive-edge triggered. If the user wishes to connect both clocks together, the shift register will always be one clock pulse ahead of the storage register.

schematics of inputs and outputs

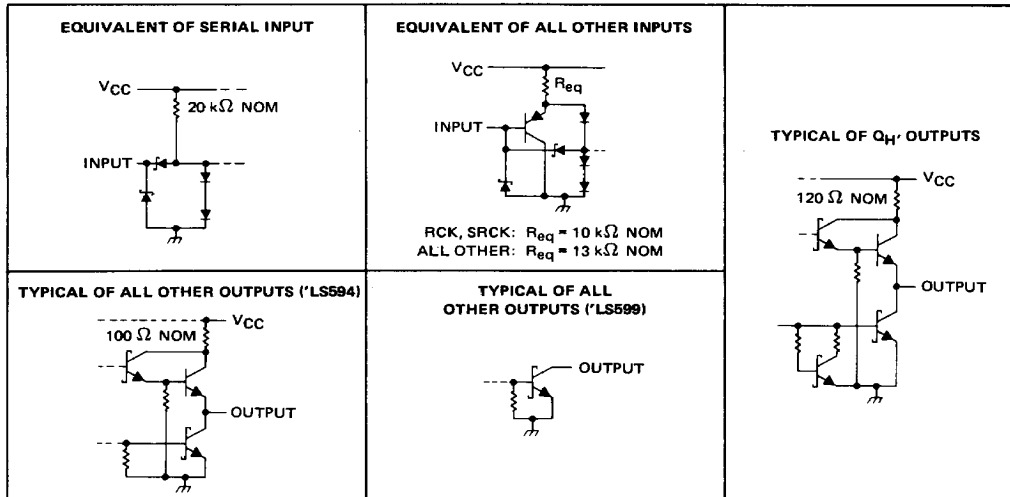

PRODUCTION DATA
This document contains information current as of publication date. Products conform to specifications on the date of Texas Instruments




3-1149

3

TTL DEVICES

TYPES SN54LS594, SN54LS599, SN74LS594, SN74LS599 8-BIT SHIFT REGISTERS WITH OUTPUT LATCHES

logic diagram (positive logic)

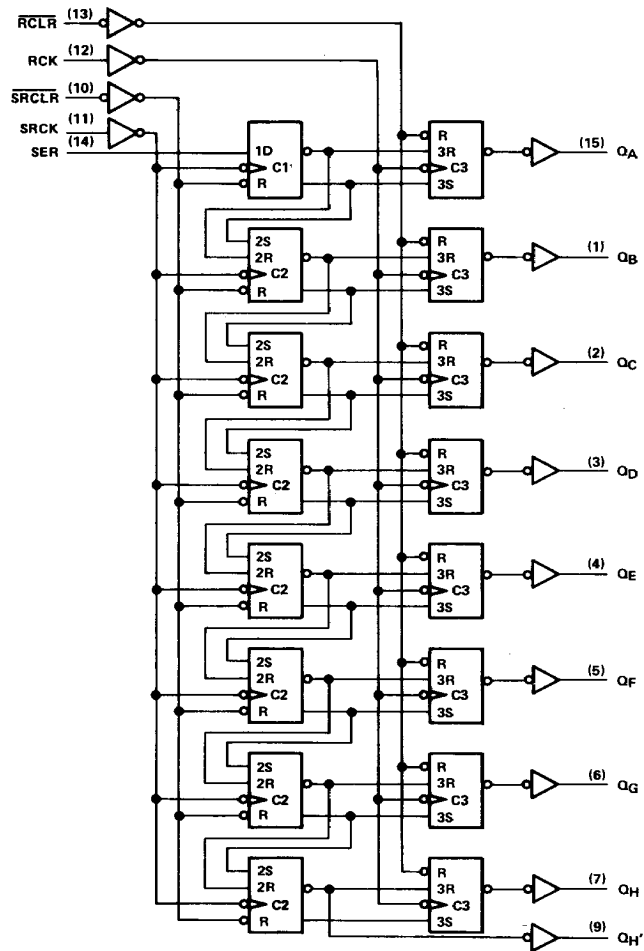

Pin numbers shown on logic notation are for J or N packages.

3

TTL DEVICES


3-1150

TEXAS
INSTRUMENTS

POST OFFICE BOX 225012 • DALLAS, TEXAS 75265

TYPES SN54LS594, SN54LS599, SN74LS594, SN74LS599
8-BIT, SHIFT REGISTERS WITH OUTPUT LATCHES

logic symbols

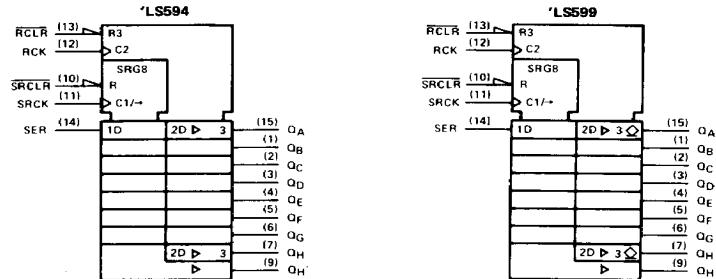

Pin numbers shown on logic notation are for J or N packages.

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

Supply voltage, V_{CC} (see Note 1).	7 V
Input voltage	7 V
Off-state output voltage	5.5 V
Operating free-air temperature range: SN54LS594, SN54LS599	-55°C to 125°C
SN74LS594, SN74LS599	0°C to 70°C
Storage temperature range	-65°C to 150°C

NOTE 1: Voltage values are with respect to the network ground terminal.

recommended operating conditions

		SN54LS'			SN74LS'			UNIT
		MIN	NOM	MAX	MIN	NOM	MAX	
V_{CC}	Supply voltage	4.5	5	5.5	4.75	5	5.25	V
V_{IH}	High-level input voltage	2			2			V
V_{IL}	Low-level input voltage			0.7			0.8	V
V_{OH}	High-level output voltage			5.5			5.5	V
I_{OH}	High-level output current			Q_A thru Q_H , 'LS599 only				mA
				Q_H			-1	
I_{OL}	Low-level output current			Q_A thru Q_H , 'LS594 only			-2.6	mA
				Q_H			8	
				Q			12	
f_{SRCK}	Shift clock frequency	0		20	0		20	MHz
f_{RCK}	Register clock frequency	0		25	0		25	MHz
$t_w(SRCK)$	Duration of shift clock pulse	25			25			ns
$t_w(RCK)$	Duration of register clock pulse	20			20			ns
$t_w(SRCLR)$	Duration of shift clear pulse, low level	20			20			ns
$t_w(RCLR)$	Duration of register clear pulse, low level	35			35			ns
t_{su}	Setup time			SRCLR inactive before SRCK $\uparrow$	20		20	ns
				SER before SRCK $\uparrow$	20		20	
				SRCK $\uparrow$ before RCK $\uparrow$ (see Note 2)	40		40	
				SRCLR low before RCK $\uparrow$	40		40	
				RCLR high before RCK $\uparrow$	20		20	
t_h	Hold time			SER after SRCK $\uparrow$	0		0	ns
T_A	Operating free-air temperature	-55		125	0		70	$^{\circ}\text{C}$

NOTE 2: This setup time ensures the register will see stable data from the shift-register outputs. The clocks may be connected together, in which case the storage register state will be one clock pulse behind the shift register.



POST OFFICE BOX 225012 • DALLAS, TEXAS 75265

3-1151

TYPES SN54LS594, SN54LS599, SN74LS594, SN74LS599 8-BIT, SHIFT REGISTERS WITH OUTPUT LATCHES

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS †		SN54LS'		SN74LS'		UNIT	
				MIN	TYP‡	MAX	MIN		TYP‡
V _{IK}		V _{CC} = MIN, I _I = - 18 mA				- 1.5	- 1.5	V	
V _{OH}	'LS594 Q	V _{CC} = MIN, V _{IH} = 2 V, V _{IL} = MAX	I _{OH} = - 1 mA	2.4	3.2			V	
	I _{OH} = - 2.6 mA				2.4	3.1			
	I _{OH} = - 1 mA		2.4	3.2	2.4	3.2			
I _{OH}	'LS599 Q	V _{CC} = MIN, V _{OH} = 5.5 V, V _{IH} = 2 V, V _{IL} = MAX,				0.1	0.1	mA	
V _{OL}	Q	V _{CC} = MIN, V _{IH} = 2 V, V _{IL} = MAX	I _{OL} = 12 mA		0.25	0.4	0.25	0.4	V
	I _{OL} = 24 mA					0.35	0.5		
	I _{OL} = 8 mA			0.25	0.4	0.25	0.4		
	I _{OL} = 16 mA					0.35	0.5		
I _I		V _{CC} = MAX, V _I = 7 V				0.1	0.1	mA	
I _{IH}		V _{CC} = MAX, V _I = 2.7 V			20		20	μA	
I _{IL}	SER	V _{CC} = MAX, V _I = 0.4 V			- 0.4		- 0.4	mA	
	All others				- 0.2		- 0.2		
I _{OS} §	'LS594 Q	V _{CC} = MAX, V _O = 0		- 30	- 130	- 30	- 130	mA	
	Q _H '			- 20	- 100	- 20	- 100		
I _{CCH}	'LS594	V _{CC} = MAX, All possible inputs grounded, All outputs open			34	50	34	50	mA
	'LS599				30	45	30	45	
I _{CCL}	'LS594				42	65	42	65	mA
	'LS599				38	55	38	55	

† For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

‡ All typical values are at V_{CC} = 5 V, T_A = 25°C.

§ Not more than one output should be shorted at a time, and duration of the short-circuit should not exceed one second.

switching characteristics, V_{CC} = 5 V, T_A = 25°C, (see note 3)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	TEST CONDITIONS		'LS594			'LS599			UNIT
					MIN	TYP	MAX	MIN	TYP	MAX	
t _{PLH}	SRCK†	Q _H '	R _L = 1 kΩ, C _L = 30 pF		12	18		12	18		ns
t _{PHL}					15	23		17	25		ns
t _{PLH}	RCK†	Q _A thru Q _H	R _L = 667 Ω, C _L = 45 pF		12	18		28	42		ns
t _{PHL}					20	30		24	35		ns
t _{PHL}	SRCLR‡	Q _H '	R _L = 1 kΩ, C _L = 30 pF		22	33		24	35		ns
t _{PHL}	RCLR‡	Q _A thru Q _H	R _L = 667 Ω, C _L = 45 pF		38	57		40	60		ns

NOTE 3: See General Information Section for load circuits and voltage waveforms.

3

TTL DEVICES