

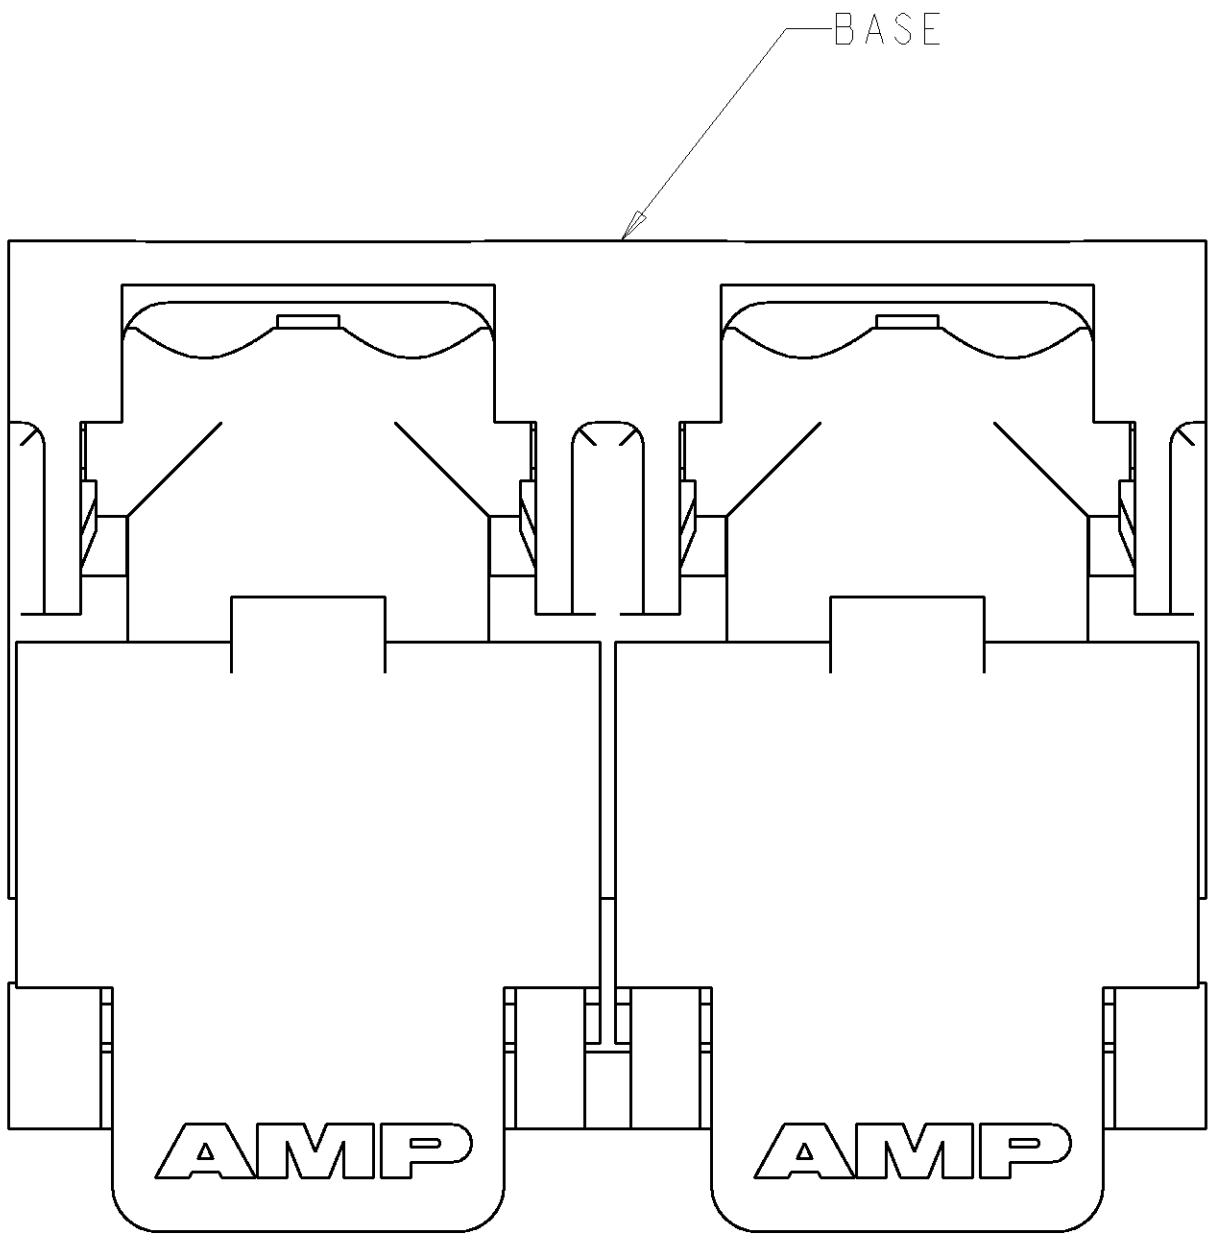


LOC		DIST		REVISONS			
GP	0	F	LTR	DESCRIPTION	DATE	DWN	APVD
		B		REV: EC OUIE-0007-01	22JAN01	JA	TW
		C		REVISED PER EC 0S15-0450-02	21JAN2003	DLD	RPM
		D		REVISED PER EC 0S15-0324-03	05DEC03	JB	CF


- 1 MATERIAL: BASE - POLYESTER MOLDING COMPOUND, BLACK.
WIRE STUFFER: - POLYESTER MOLDING COMPOUND, RED.
TERMINAL - COPPER ALLOY, PLATED WITH 3.81µm MINIMUM THICK
TIN OVER 1.27µm MINIMUM THICK NICKEL UNDERPLATE.
- 2 EACH WIRE ENTRY HOLE ACCEPTS ONE UNSTRIPPED SOLID COPPER
22-26 AWG WIRE WITH WIRE INSULATION DIAMETER RANGE FROM
.060 THROUGH .040. OTHER WIRE SIZES AND TYPES SHALL BE
SUBMITTED TO AMP ENGINEERS FOR APPLICATION APPROVAL.
3. SOLDER TABS PROVIDED FOR PERMANENT BOARD MOUNTING.
- 4 LOCATION OF HOLE PATTERN DETERMINED BASED ON CUSTOMER
REQUIREMENTS.

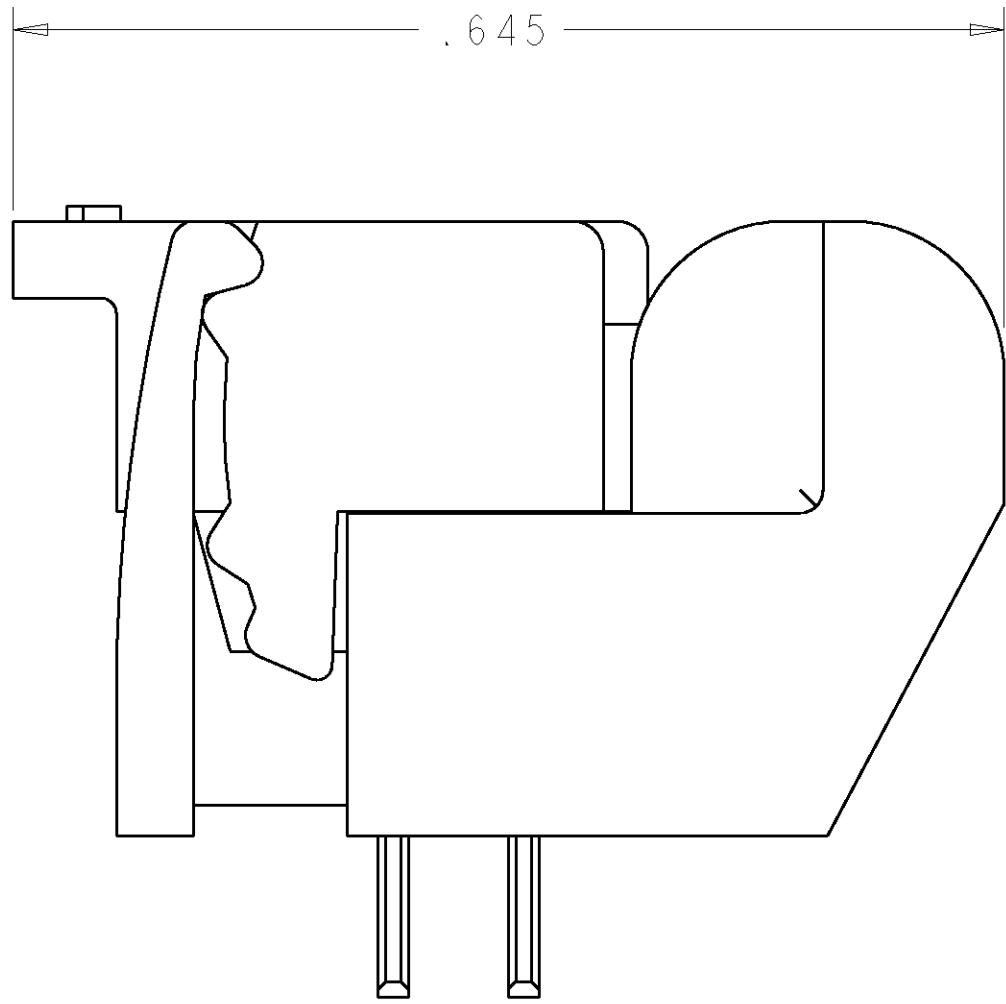


WIRE STUFFER

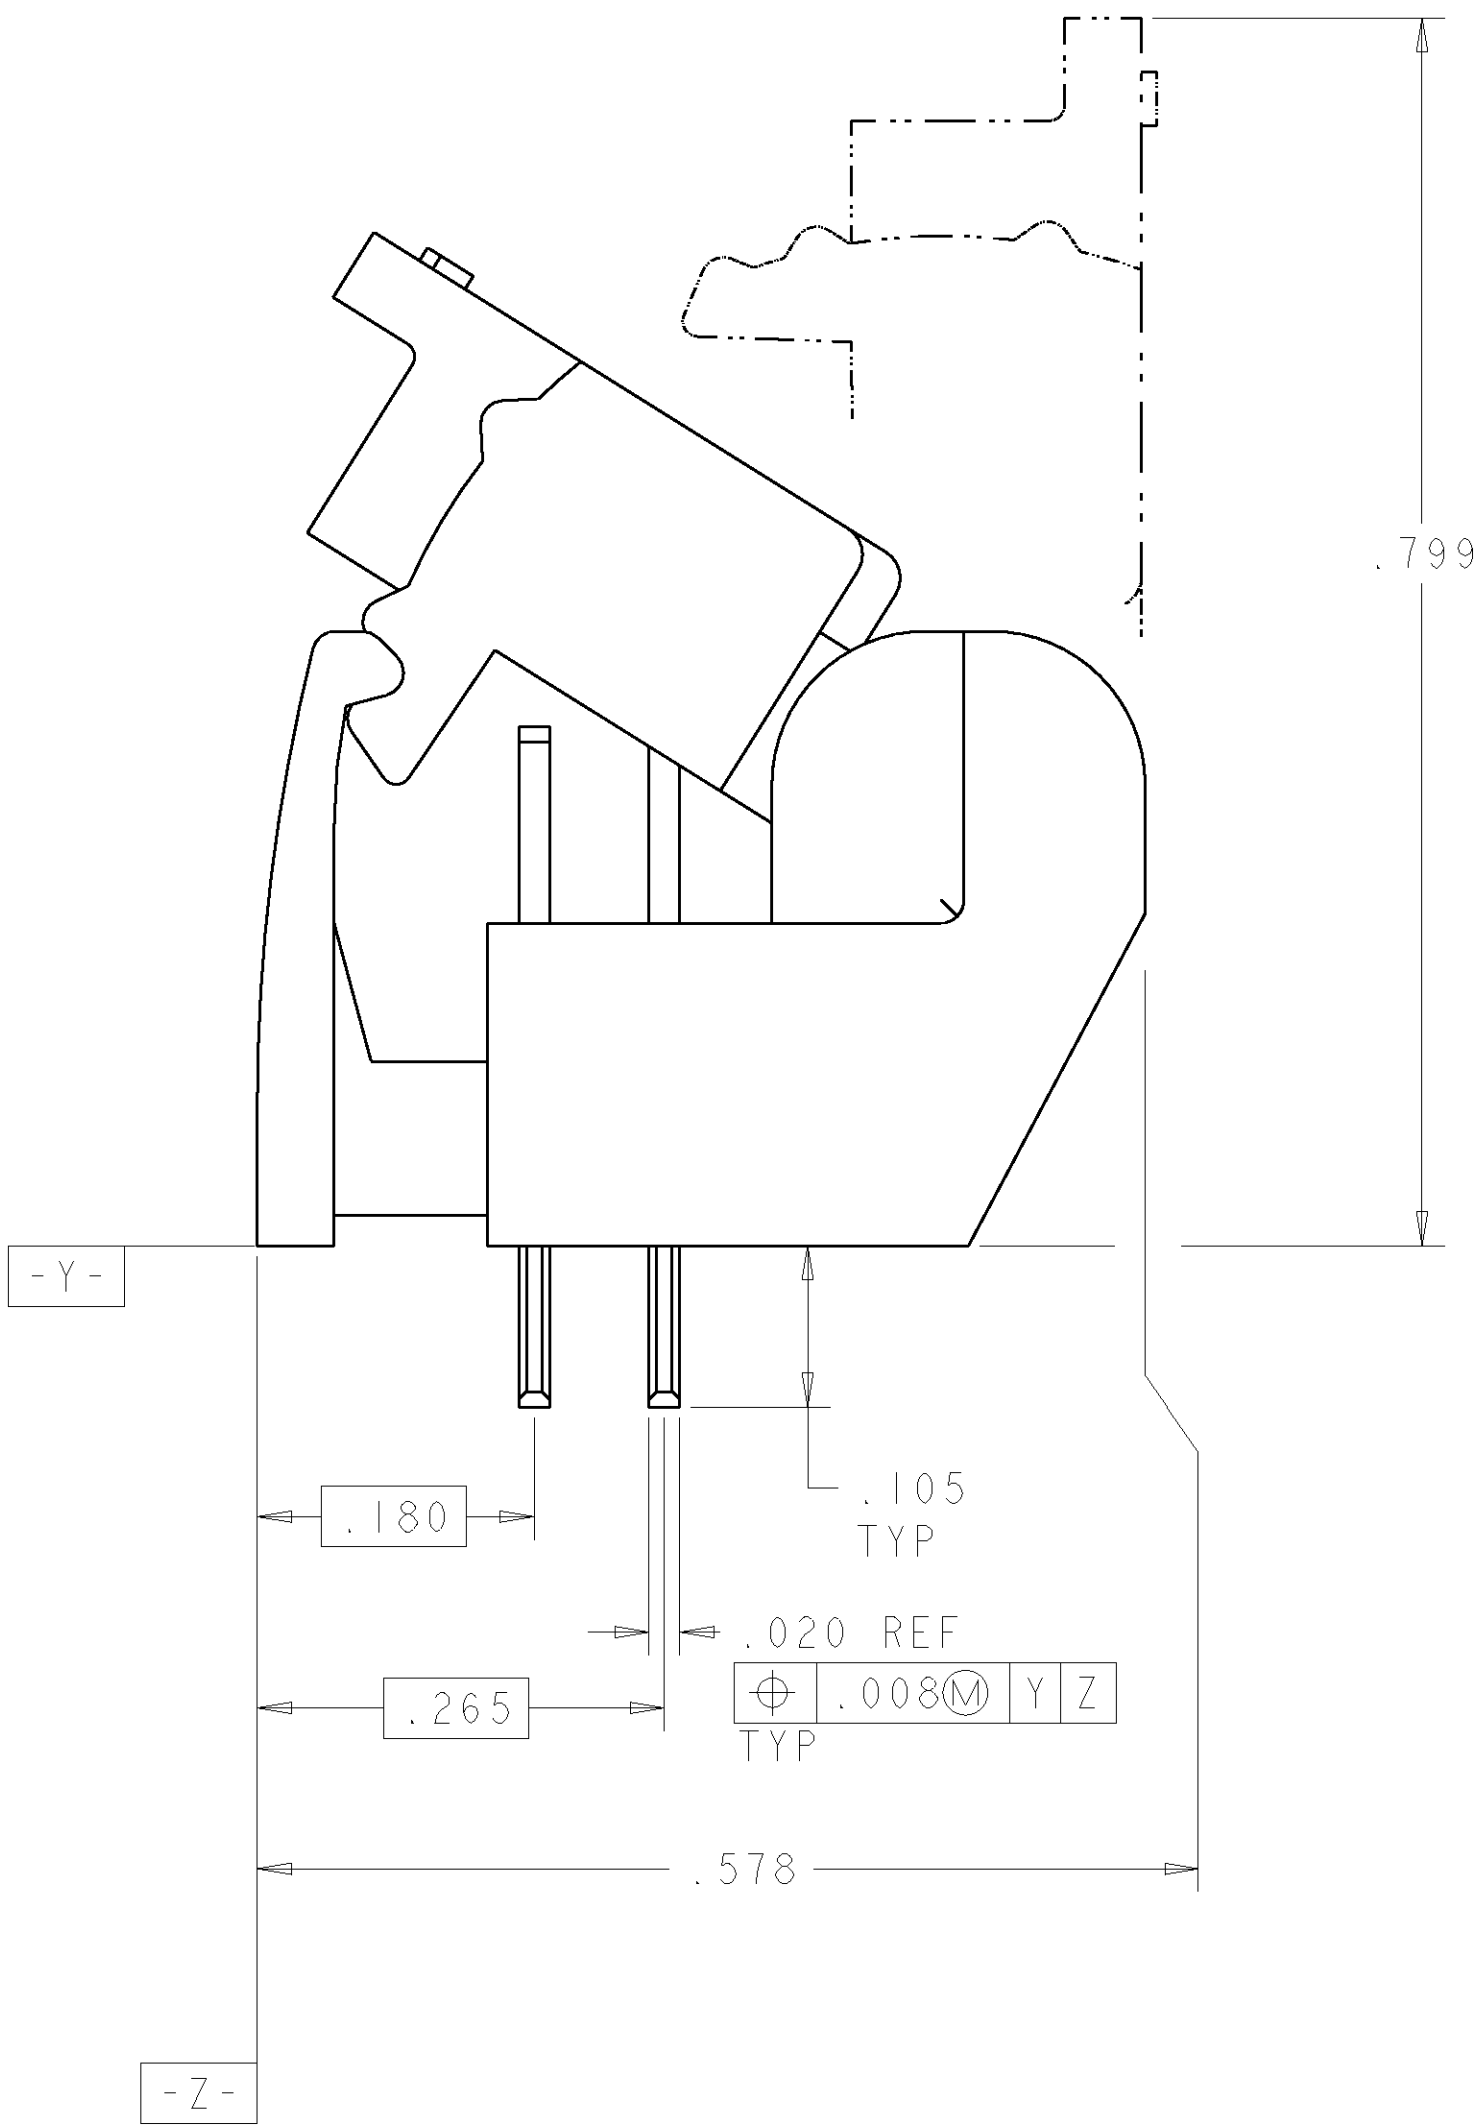

CLOSED POSITION

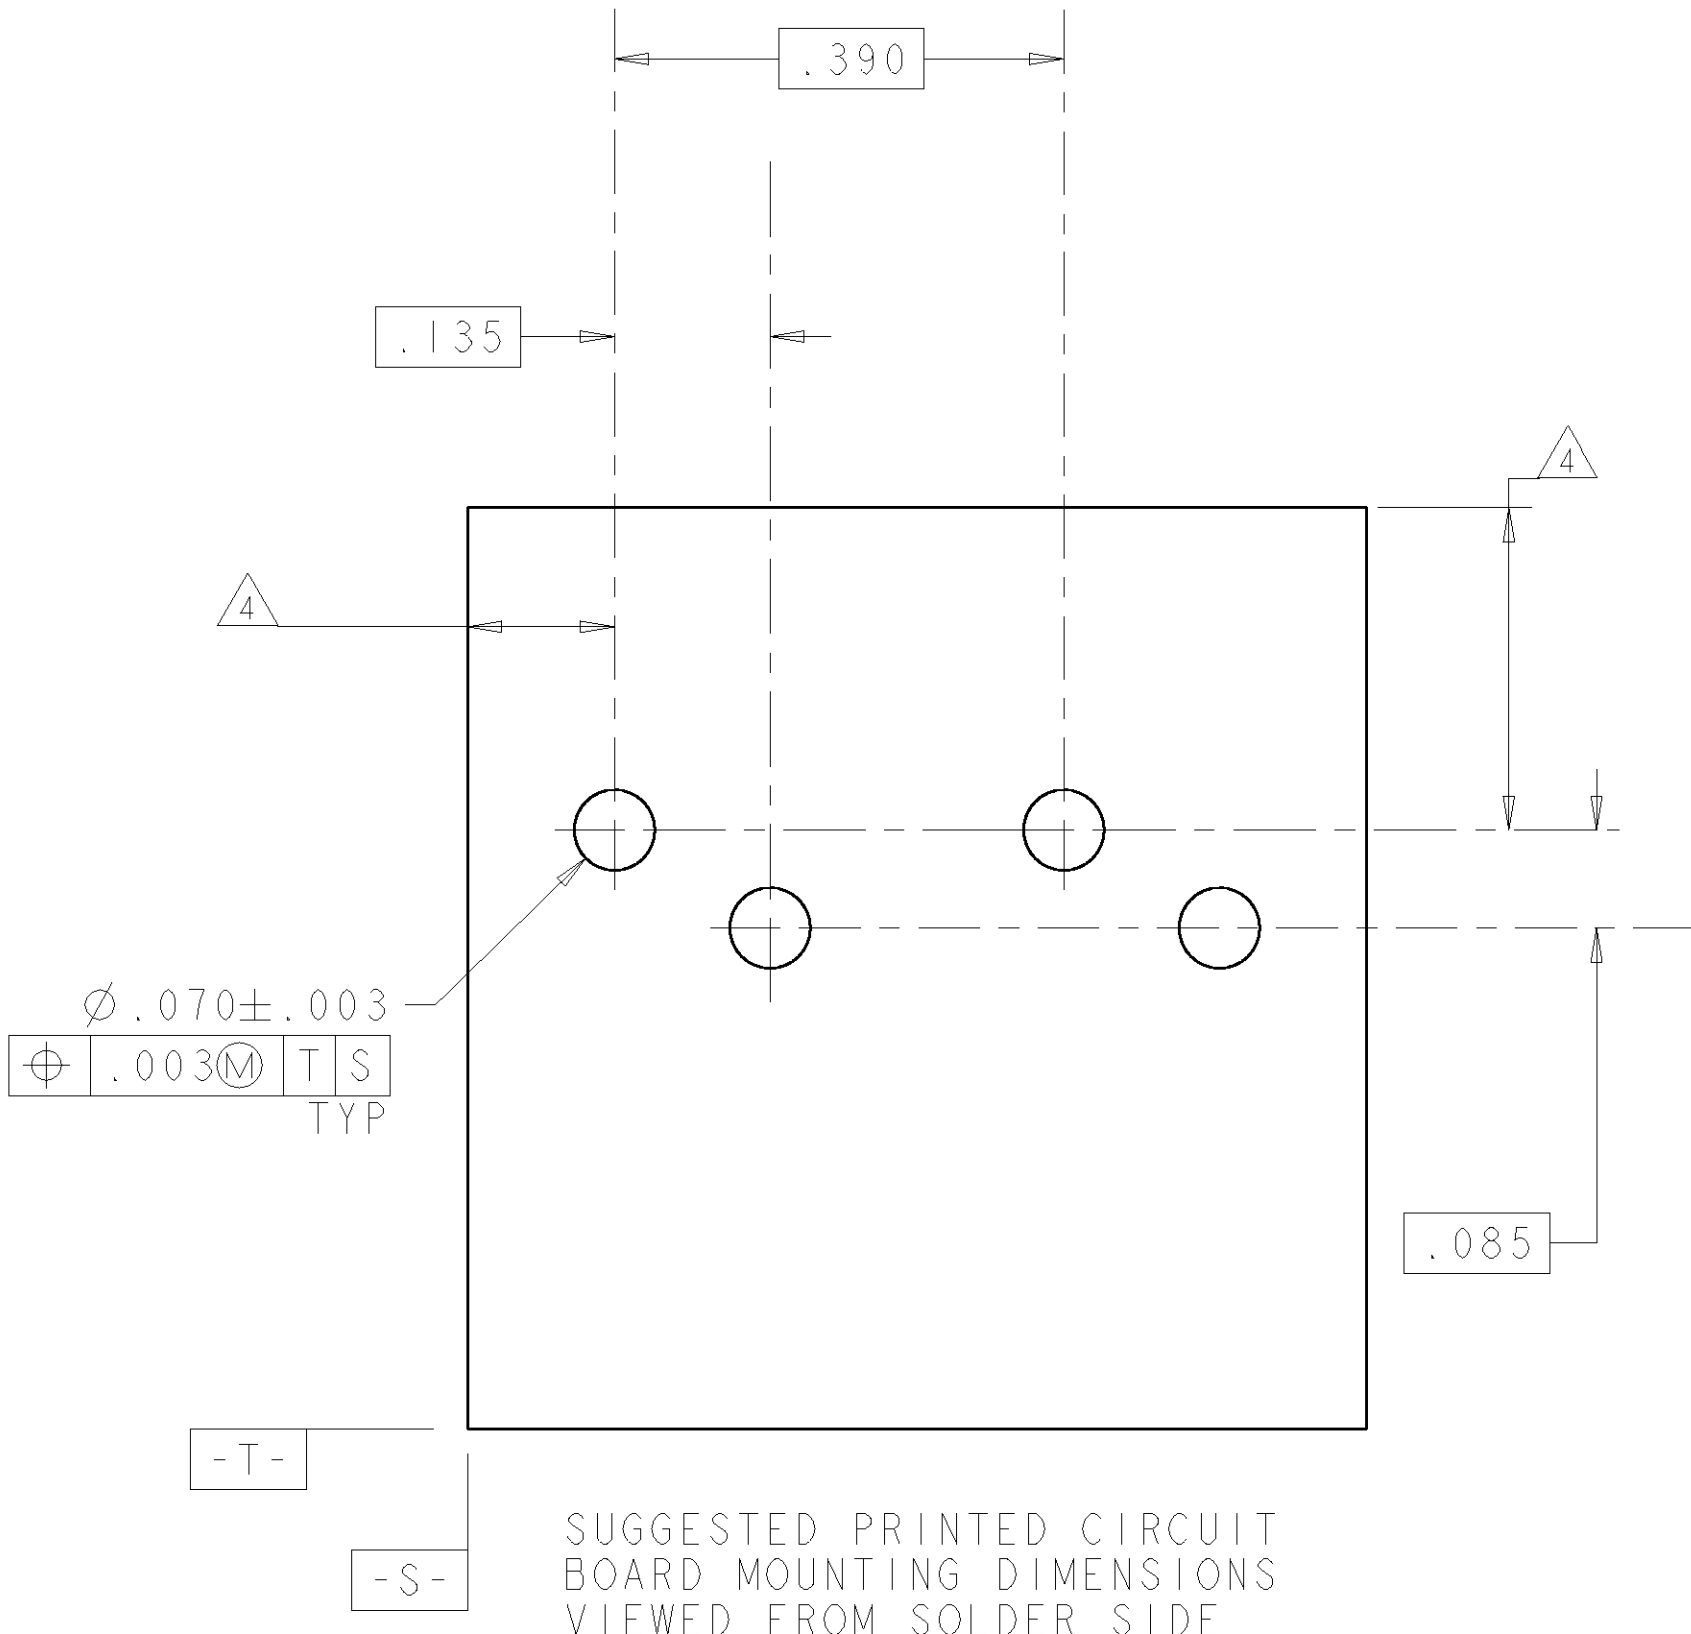

SUGGESTED PRINTED CIRCUIT
BOARD MOUNTING DIMENSIONS
VIEWED FROM SOLDER SIDE

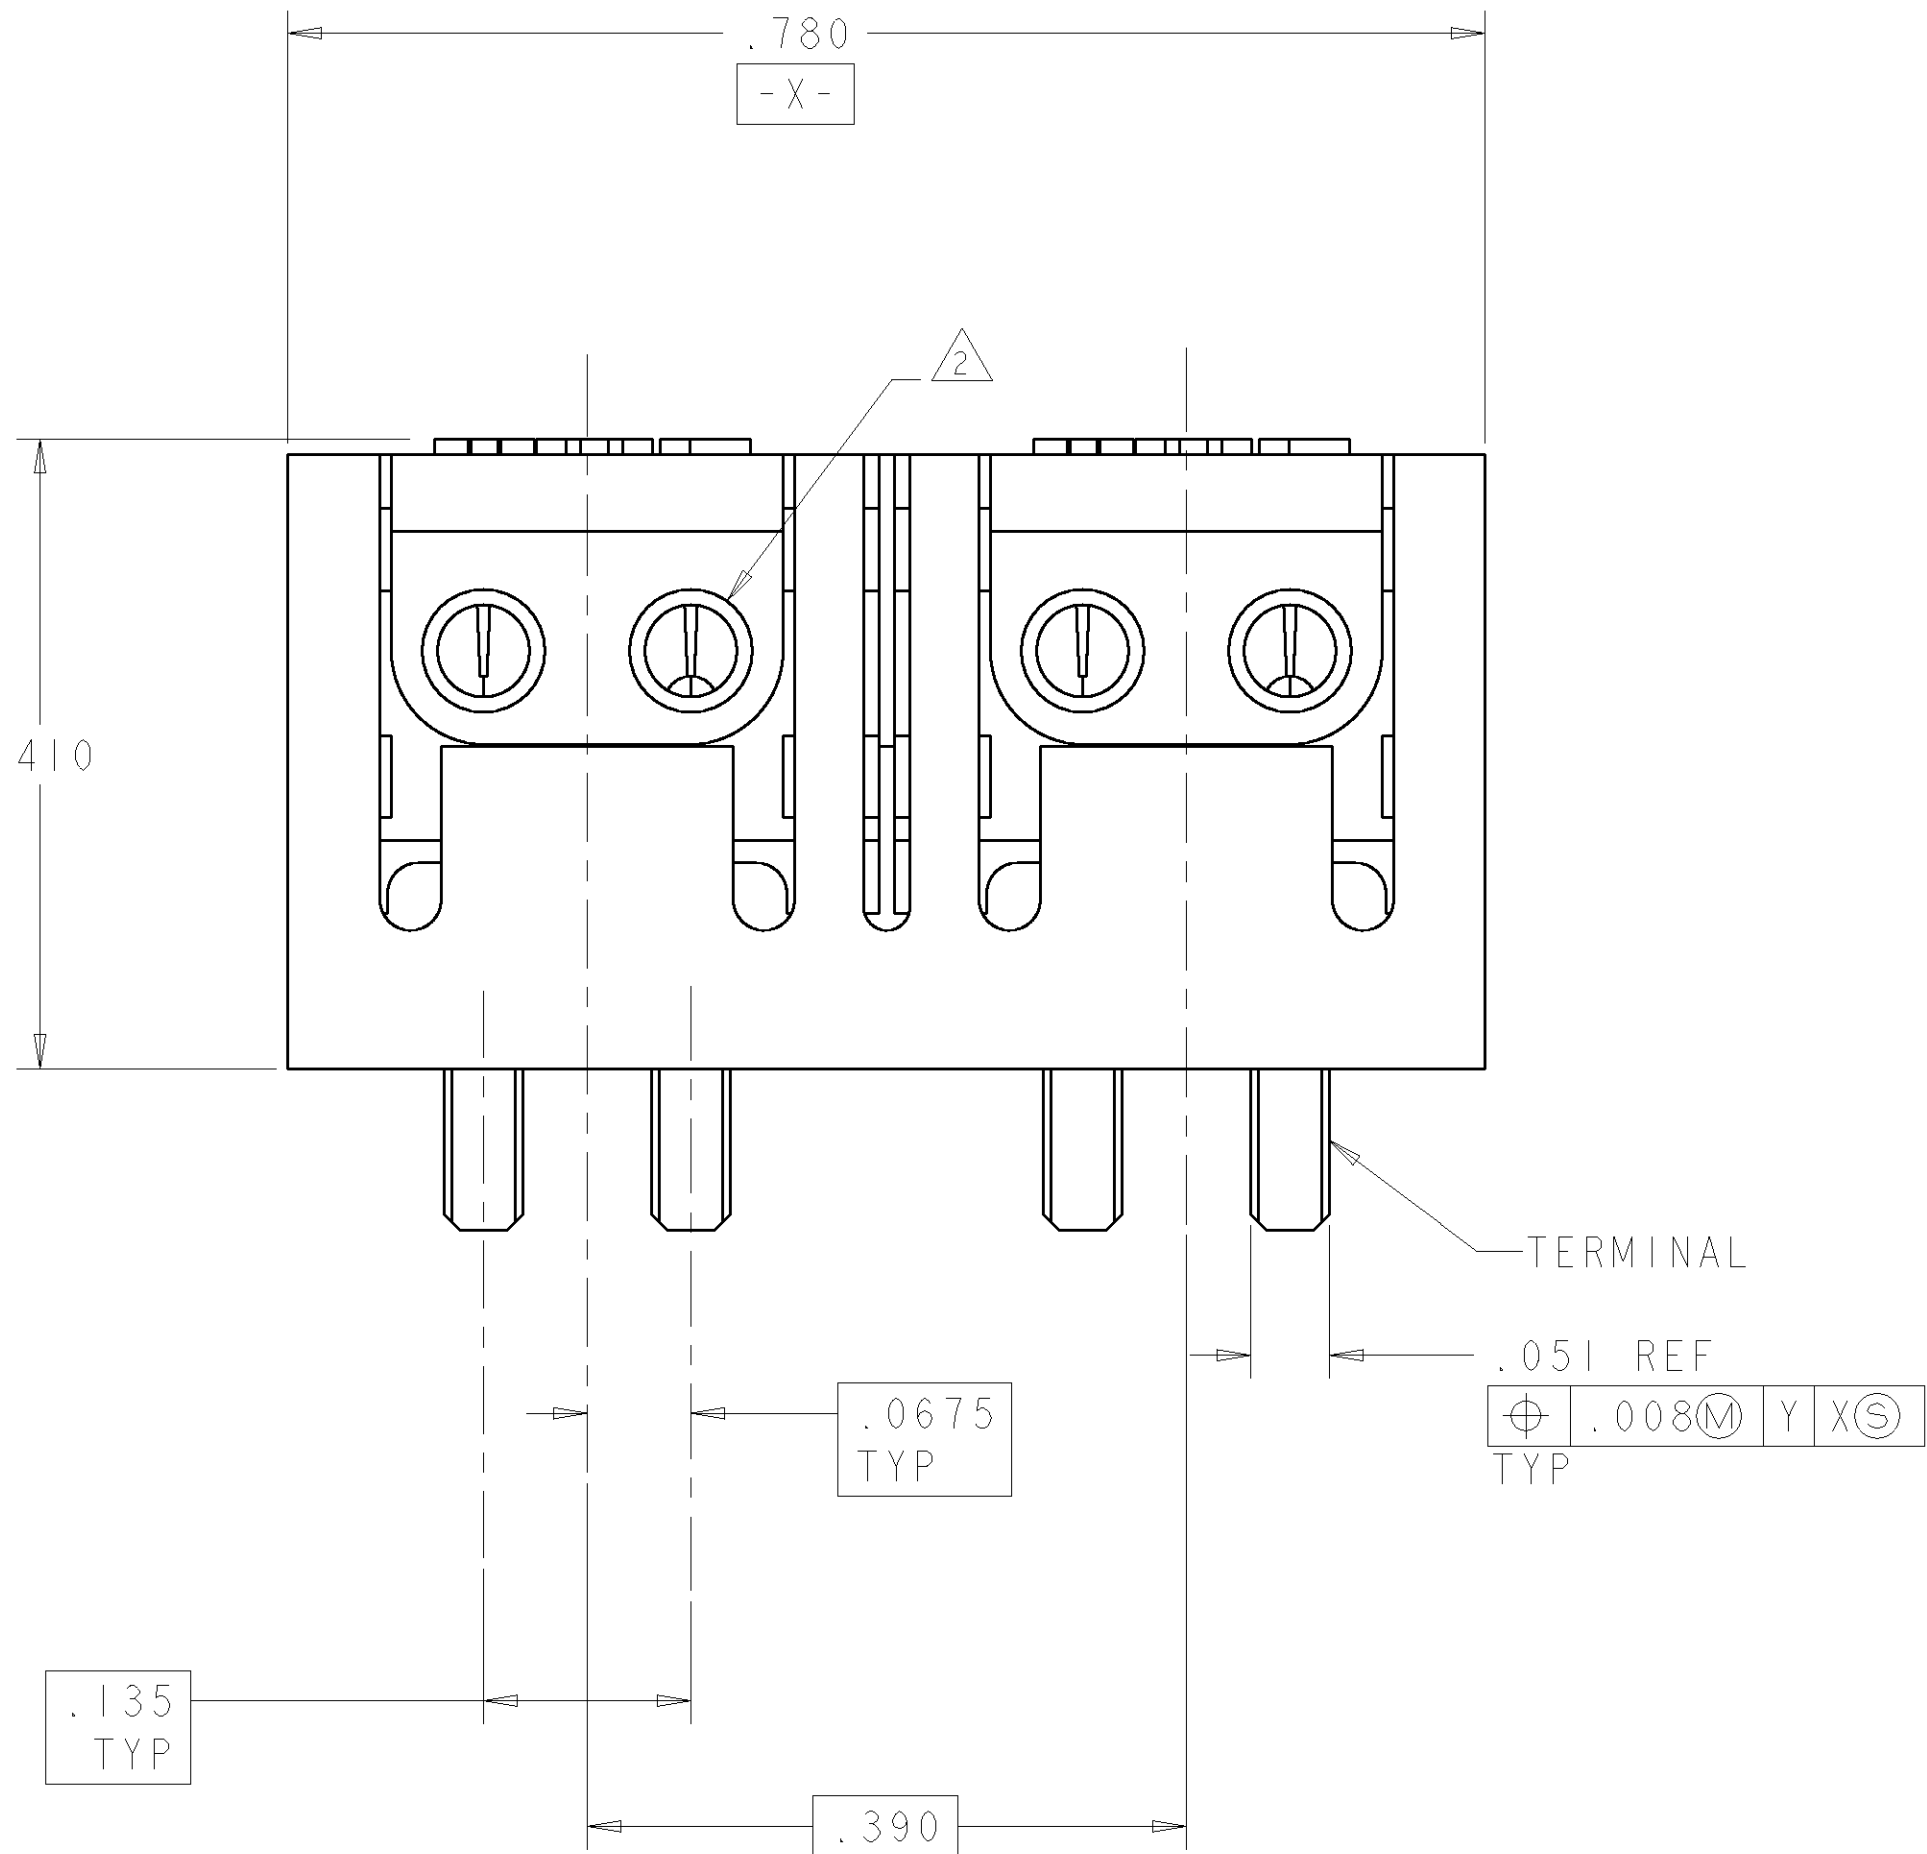

TERMINAL

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. ANY DISCREPANCY IN CHANGES AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.				DWN J. AHERON	05SEP00	AMP AMP Incorporated Harrisburg, PA 17105-3608	
DIMENSIONS: INCHES				CHK -	-		
TOLERANCES UNLESS OTHERWISE SPECIFIED:				APVD T. WOLITACKI	05SEP00	NAME ASSEMBLY, DOUBLE PAIR, DOUBLE ENTRY, PIVOT II CONNECTOR	
0 PLC ±.01 1 PLC ±.01 2 PLC ±.01 3 PLC ±.005 4 PLC ±.005 ANGLES ±.0°				PRODUCT SPEC	-		
MATERIAL				APPLICATION SPEC	-	SIZE A1	CAGE CODE 00779
FINISH				WEIGHT	-	DRAWING NO. C-1339343	SCALE 6:1
CUSTOMER DRAWING				SHEET 1 OF 1		REV D	