

ED Series

Highest Performance Compact
RFI Power Line Filters
with IEC Connectors



UL Recognized
CSA Certified
VDE Approved

ED Series


ED series filters are more effective than general-purpose filters in applications where line-to-line and low-frequency line-to-ground noise must be controlled; for example, to bring equipment into compliance with FCC conducted emissions standards.

The ED series offers significantly higher performance than comparably sized filters, especially at high frequencies, yet is in the EF series package which incorporates the IEC power line connector. Models ED1, ED1C, and ED2 have .250" terminals on load side; ED4, ED4C, ED8, and ED8C have wire leads.


Models 6ED1C, 10ED1C, 6ED4C, and 6ED8C additionally incorporate a separate ground-circuit inductor to isolate the equipment chassis from power line ground at RF frequencies.

Electrical Schematics

ED Models

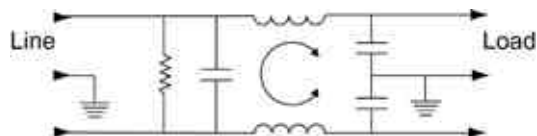


ED-C Models

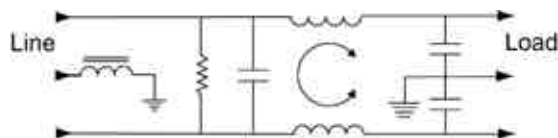

Resistor location for reference only.

Line Cord

Line Cord No. GA400:
7 1/2 foot, 3-conductor line cord to mate with ED series.

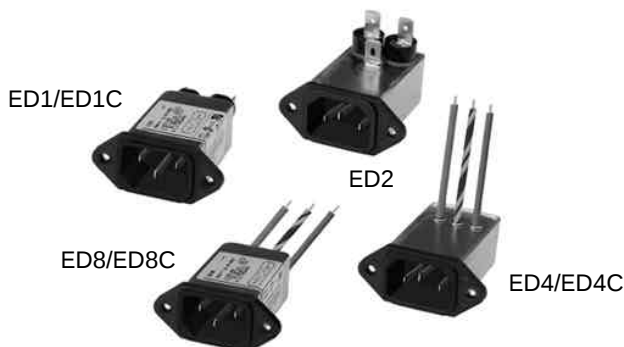

Specifications

Maximum leakage current, each

line-to-ground	@ 120 VAC 60 Hz:	.22 mA
	@ 250 VAC 50 Hz:	.38 mA

Hipot rating (one minute):

line-to-ground	1500 VAC
line-to-line	1450 VDC

Operating frequency:

50/60 Hz

Rated voltage:

120/250 VAC

Minimum insertion loss in dB:

Line-to-ground in 50 ohm circuit

Current Rating	.15	.5	1	5	10	30
----------------	-----	----	---	---	----	----

ED1, ED2

ED4, ED8

1A	24	35	42	49	52	54
3A	20	29	36	45	50	54
6A	14	23	30	41	45	50
10A	8	14	20	35	39	45
15A	4	9	12	28	34	40

ED1C

6A	14	20	25	37	42	50
10A	8	14	20	35	39	45

ED4C, ED8C

6A	14	20	25	37	42	50
----	----	----	----	----	----	----

Line-to-line in 50 ohm circuit

Current Rating	.15	.5	1	5	10	30
----------------	-----	----	---	---	----	----

ED1, ED2

ED4, ED8

1A	3	15	20	37	37	36
3A	3	15	20	37	37	36
6A	3	15	20	31	35	34
10A	8	20	25	38	44	47
15A	6	18	23	33	44	47

ED1C

6A	7	17	23	36	42	42
10A	8	20	25	38	44	47

ED4C, ED8C


6A	7	17	23	29	38	42
----	---	----	----	----	----	----

Series ED


Case Styles

Metric shown in italics.

ED1 & ED1C

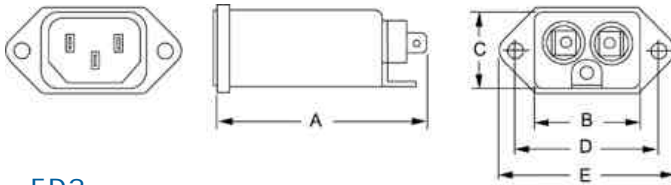


ED2

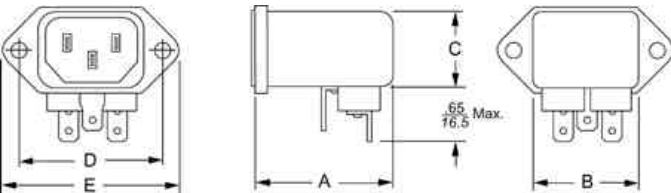


Typical dimensions

Terminals: $\frac{.250}{6.35}$ (3) Holes: $\frac{.07}{1.8}$ Dia. (4) Slot: $\frac{.07 \times .16}{1.8 \times 4.1}$

ED4 & ED4C

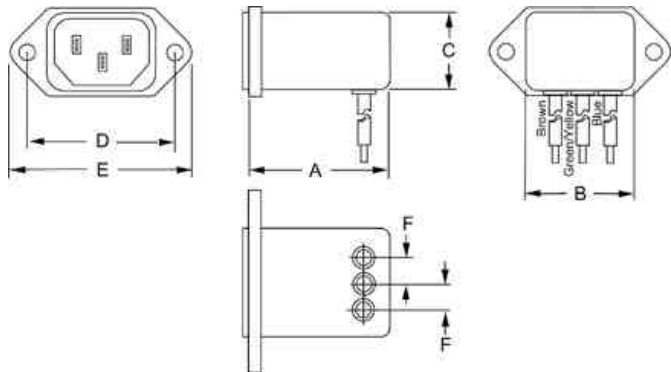


ED8 & ED8C

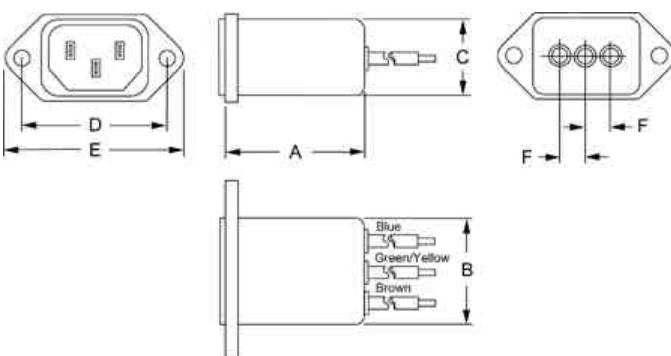

Typical dimensions

Wire leads: $\frac{4.0}{101.6}$ Min. Mounting holes: $\frac{.132}{3.35}$ Dia. (2)

Recommended Panel Cutouts

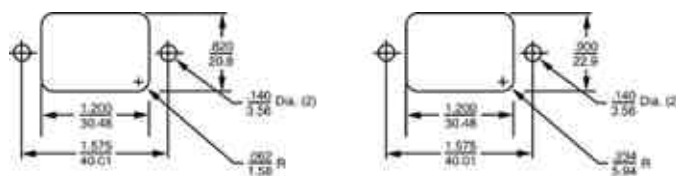

Panel Cutout (front mount)

Tolerance $\pm \frac{.005}{0.13}$

Panel Cutout (front mount)

Tolerance $\pm \frac{.005}{0.13}$

Note 1: ED1, ED1C, ED8 and ED8C allow front or back mounting.

Note 2: ED2, ED4 and ED4C allow back mounting only.


Case Dimensions

Metric shown in italics.

Part No.	A (max)	B (max)	C (max)	D $\pm .015$ $\pm .38$	E (max)	F (ref)
1ED1,	2.21	1.19	0.81	1.575	1.98	—
3ED3	56.0	30.2	20.6	40.01	50.3	—
1ED2,	1.55	1.19	0.85	1.575	1.98	—
3ED2	39.4	30.2	21.6	40.01	50.3	—
1ED4,	1.55	1.19	0.85	1.575	1.98	.295
3ED4	39.4	30.2	21.6	40.01	50.3	7.5
1ED8,	1.55	1.19	0.81	1.575	1.98	.295
3ED8	39.4	30.2	20.6	40.01	50.3	7.5
6ED1	2.21	1.19	0.81	1.575	1.98	—
	56.0	30.2	20.6	40.01	50.3	—
6ED1C	2.62	1.19	0.81	1.575	1.98	—
	66.5	30.2	20.6	40.01	50.3	—
6ED2	1.55	1.19	0.85	1.575	1.98	—
	39.4	30.2	21.6	40.01	50.3	—
6ED4	1.55	1.19	0.85	1.575	1.98	.295
	39.4	30.2	21.6	40.01	50.3	7.5
6ED4C	1.98	1.19	0.85	1.575	1.98	.295
	50.3	30.2	21.6	40.01	50.3	7.5
6ED8	1.55	1.19	0.81	1.575	1.98	.295
	39.4	30.2	20.6	40.01	50.3	7.5
6ED8C	1.98	1.19	0.81	1.575	1.98	.295
	50.3	30.2	20.6	40.01	50.3	7.5
10ED1,	2.62	1.19	0.81	1.575	1.98	—
*15ED1	66.5	30.2	20.6	40.01	50.3	—
10ED1C	2.62	1.19	0.81	1.575	1.98	—
	66.5	30.2	20.6	40.01	50.3	—
*15ED8	1.98	1.19	0.81	1.575	1.98	—
	50.3	30.2	20.6	40.01	50.3	—

Ordering Information

Consult your local Corcom sales representative for pricing.

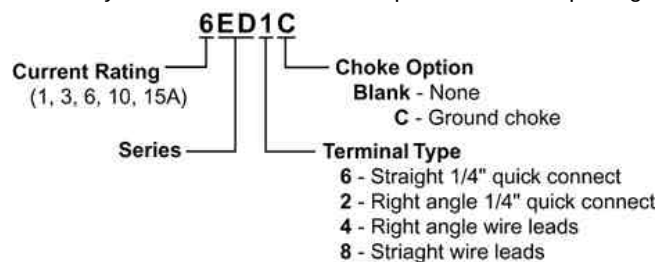

Available Part Numbers

1ED1	6ED2
1ED2	6ED4
1ED4	6ED4C
1ED8	6ED8
3ED1	6ED8C
3ED2	10ED1
3ED4	10ED1C
3ED8	15ED1
6ED1	15ED8
6ED1C	

Line Cord No. GA400
Insulating Boot No. FA601

*15 ED1, 15ED8

UL, CSA 15 Amps/250VAC
VDE 10 Amps/250VAC

corcom

ED
25