





ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

SPC-F005.DWG

REVISIONS

DOC. NO. SPC-F005 * Effective: 7/8/02 * DCP No: 1398

DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
			VEE	10-08-10	JAG	14-08-10	XXX	25-08-10

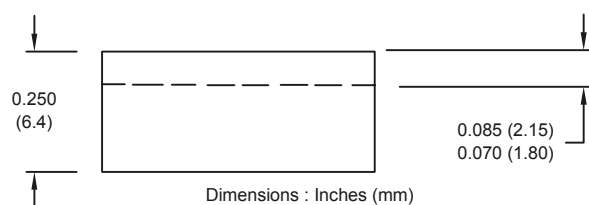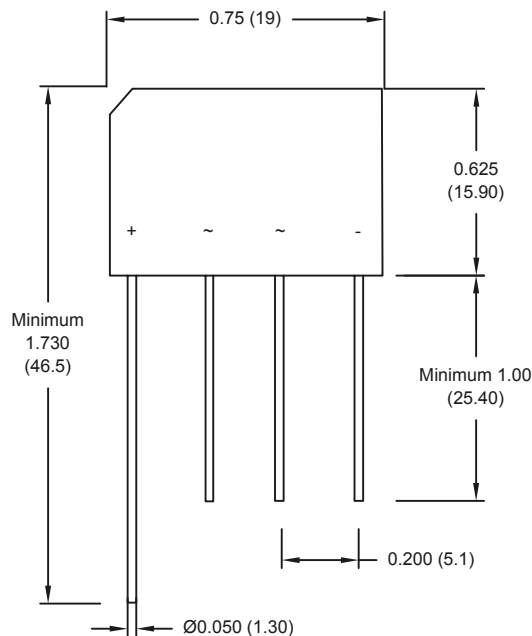

Dimensions : Inches (mm)

Specifications:

1. Maximum Recurrent Peak Reverse Voltage: 200V
2. Maximum RMS Bridge Input Voltage: 420V
3. Maximum DC Blocking Voltage: 600V
4. Maximum Average Rectified Output Current at 50°C ambient: 4.0A
5. Peak One Cycle Surge Overload Current: 200A
6. Maximum Forward Voltage Drop Per Bridge Element at 4.0A DC: 1.1V
7. Maximum (Total Bridge) Reverse Leakage at Rated DC Blocking Voltage: 10µA
8. Maximum (Total Bridge) Reverse Leakage at Rated DC Blocking Voltage and 100°C: 1.0mA
9. It Rating for Fusing (t < 8.3ms) 93.0 A. Sec
10. Typical thermal Resistance per Leg (Note 1) R θJA: 19.0°C/W
11. Typical thermal Resistance per Leg (Note 2) R θJL: 2.4°C/W
12. Operating Temperature Range: -55 to 125°C
13. Storage Temperature Range: -55 to 150°C

Notes:

1. Thermal resistance from junction to ambient with units mounted on 3.0 x 3.0 x 0.11" thick (7.5 x 7.5 x 0.3cm) Aluminum plate.
2. Thermal resistance from junction to lead with units mounted on P.C.B at 0.375" (9.5mm) lead length and 0.5 x 0.5" (12 x 12mm) copper pads.

Mechanical Data:

1. Terminals: Lead solderable per MIL-STD-202 method 208
2. Mounting Position: Any
3. Weight: 0.2 ounce, 5.6 grams

DISCLAIMER:
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

TOLERANCES:

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:

VEE

DATE:

10-08-10

CHECKED BY:

JAG

DATE:

14-08-10

APPROVED BY:

XXX

DATE:

25-08-10

DRAWING TITLE:

In-Line Miniature Single Phase Silicon Bridge Rectifier

SIZE

A

DWG. NO.

XXX

ELECTRONIC FILE

19c1133

REV

A

SCALE:

NTS

U.O.M.: Millimeters

SHEET: 1 OF 1



ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

SPC-F005.DWG





REVISIONS

DOC. NO. SPC-F005 * Effective: 7/8/02 * DCP No: 1398

DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
			VEE	10-08-10	JAG	14-08-10	XXX	25-08-10



RoHS
Compliant

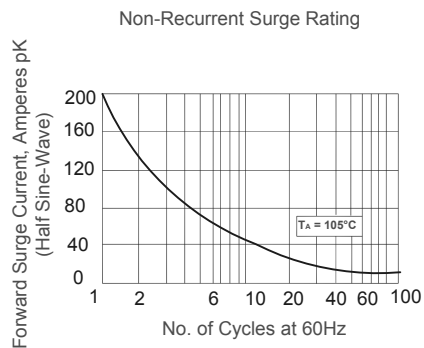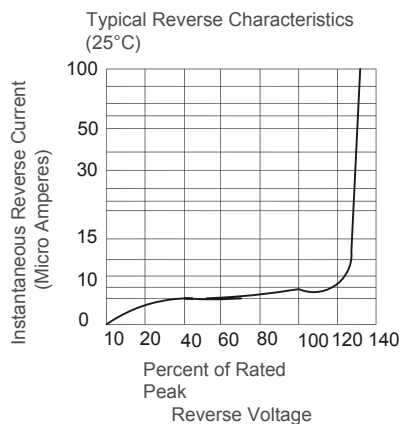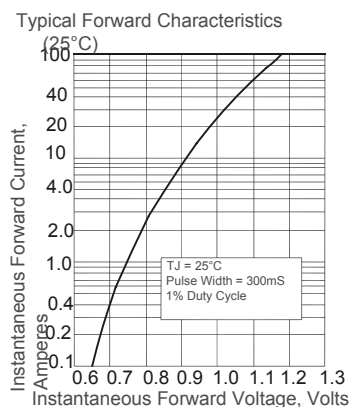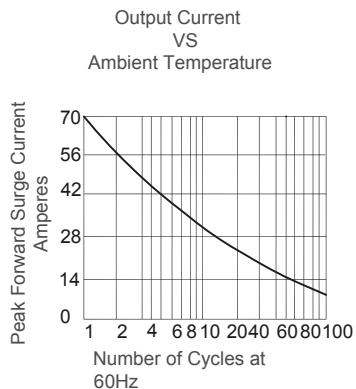

Part Number Table

Description	Part Number
In - Line Miniature Single Phase Silicon Bridge Rectifier	MCFL406-RH

DISCLAIMER:
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

TOLERANCES:

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:	DATE:
VEE	10-08-10
CHECKED BY:	DATE:
JAG	14-08-10
APPROVED BY:	DATE:
XXX	25-08-10

DRAWING TITLE: In-Line Miniature Single Phase Silicon Bridge Rectifier			
SIZE A	DWG. NO. XXX	ELECTRONIC FILE 19c1133	REV A
SCALE: NTS	U.O.M.: Millimeters	SHEET: 1 OF 1	