

T-1 (3mm) SOLID STATE LAMP

PRELIMINARY SPEC

Part Number: WP908A8GD

Green


Features

- •Low power consumption.
- ●Popular T-1 diameter package.
- General purpose leads.
- •Reliable and rugged.
- ●Long life-solid state reliability.
- •Available on tape and reel.
- ●RoHS compliant.

Description

The Green source color devices are made with Gallium Phosphide Green Light Emitting Diode.

Package Dimensions

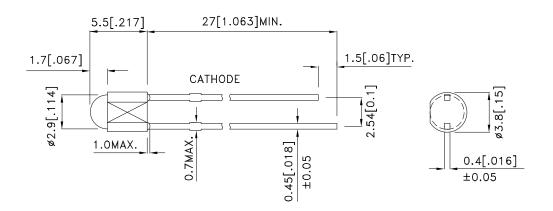

- 1. All dimensions are in millimeters (inches).
- 2. Tolerance is $\pm 0.25(0.01")$ unless otherwise noted.
- Lead spacing is measured where the leads emerge from the package.
 Specifications are subject to change without notice.





SPEC NO: DSAJ0585 **REV NO: V.1** DATE: JAN/07/2009 PAGE: 1 OF 4 APPROVED: WYNEC **CHECKED: Allen Liu** DRAWN: Y.F.Lu ERP: 1101021508

Kingbright

Selection Guide

Part No.	Dice	Lens Type	lv (mc @ 10	,	Viewing Angle [1]
			Min.	Тур.	201/2
WP908A8GD	Green (GaP)	GREEN DIFFUSED	5	25	80°

Notes:

- 1. θ1/2 is the angle from optical centerline where the luminous intensity is 1/2 the optical centerline value. 2. Luminous intensity/ luminous Flux: +/-15%.

Electrical / Optical Characteristics at TA=25°C

Symbol	Parameter	Device	Тур.	Max.	Units	Test Conditions
λpeak	Peak Wavelength	Green	565		nm	IF=20mA
λD [1]	Dominant Wavelength	Green	568		nm	IF=20mA
Δλ1/2	Spectral Line Half-width	Green	30		nm	IF=20mA
С	Capacitance	Green	15		pF	VF=0V;f=1MHz
VF [2]	Forward Voltage	Green	2.2	2.5	V	IF=20mA
lr	Reverse Current	Green		10	uA	V _R = 5V

- Notes: 1.Wavelength: +/-1nm. 2. Forward Voltage: +/-0.1V.


Absolute Maximum Ratings at TA=25°C

Parameter	Green	Units	
Power dissipation	62.5	mW	
DC Forward Current	25	mA	
Peak Forward Current [1]	140	mA	
Reverse Voltage	5	V	
Operating/Storage Temperature	-40°C To +85°C		
Lead Solder Temperature [2]	260°C For 3 Seconds		
Lead Solder Temperature [3]	260°C For 5 Seconds		


- 1/10 Duty Cycle, 0.1ms Pulse Width.
 2. 2mm below package base.
 5mm below package base.


SPEC NO: DSAJ0585 **REV NO: V.1** DATE: JAN/07/2009 PAGE: 2 OF 4 APPROVED: WYNEC **CHECKED: Allen Liu** DRAWN: Y.F.Lu ERP: 1101021508


Kingbright

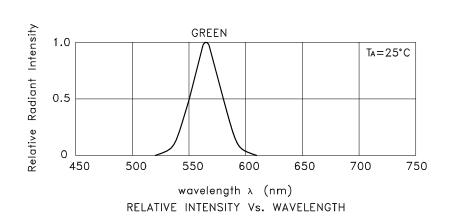



Green WP908A8GD












SPATIAL DISTRIBUTION

SPEC NO: DSAJ0585 APPROVED: WYNEC REV NO: V.1 CHECKED: Allen Liu DATE: JAN/07/2009 DRAWN: Y.F.Lu PAGE: 3 OF 4 ERP: 1101021508

Kingbright

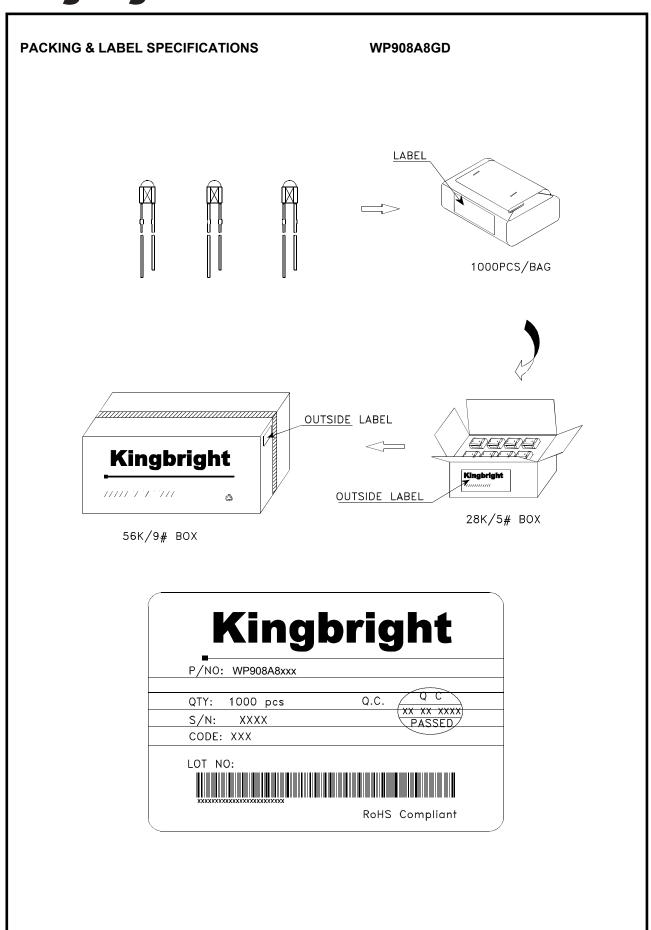

SPEC NO: DSAJ0585 APPROVED: WYNEC REV NO: V.1 CHECKED: Allen Liu DATE: JAN/07/2009 DRAWN: Y.F.Lu PAGE: 4 OF 4 ERP: 1101021508