


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION ,19 .
© COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

MOD	LOC	DIST	P	F	REVISIONS				
4	BD	35			ZONE	LTR	DESCRIPTION	DATE	APPD
						C	REDRAWN W/O CHANGE PER EC 0020-600-94	06/20/94	AF

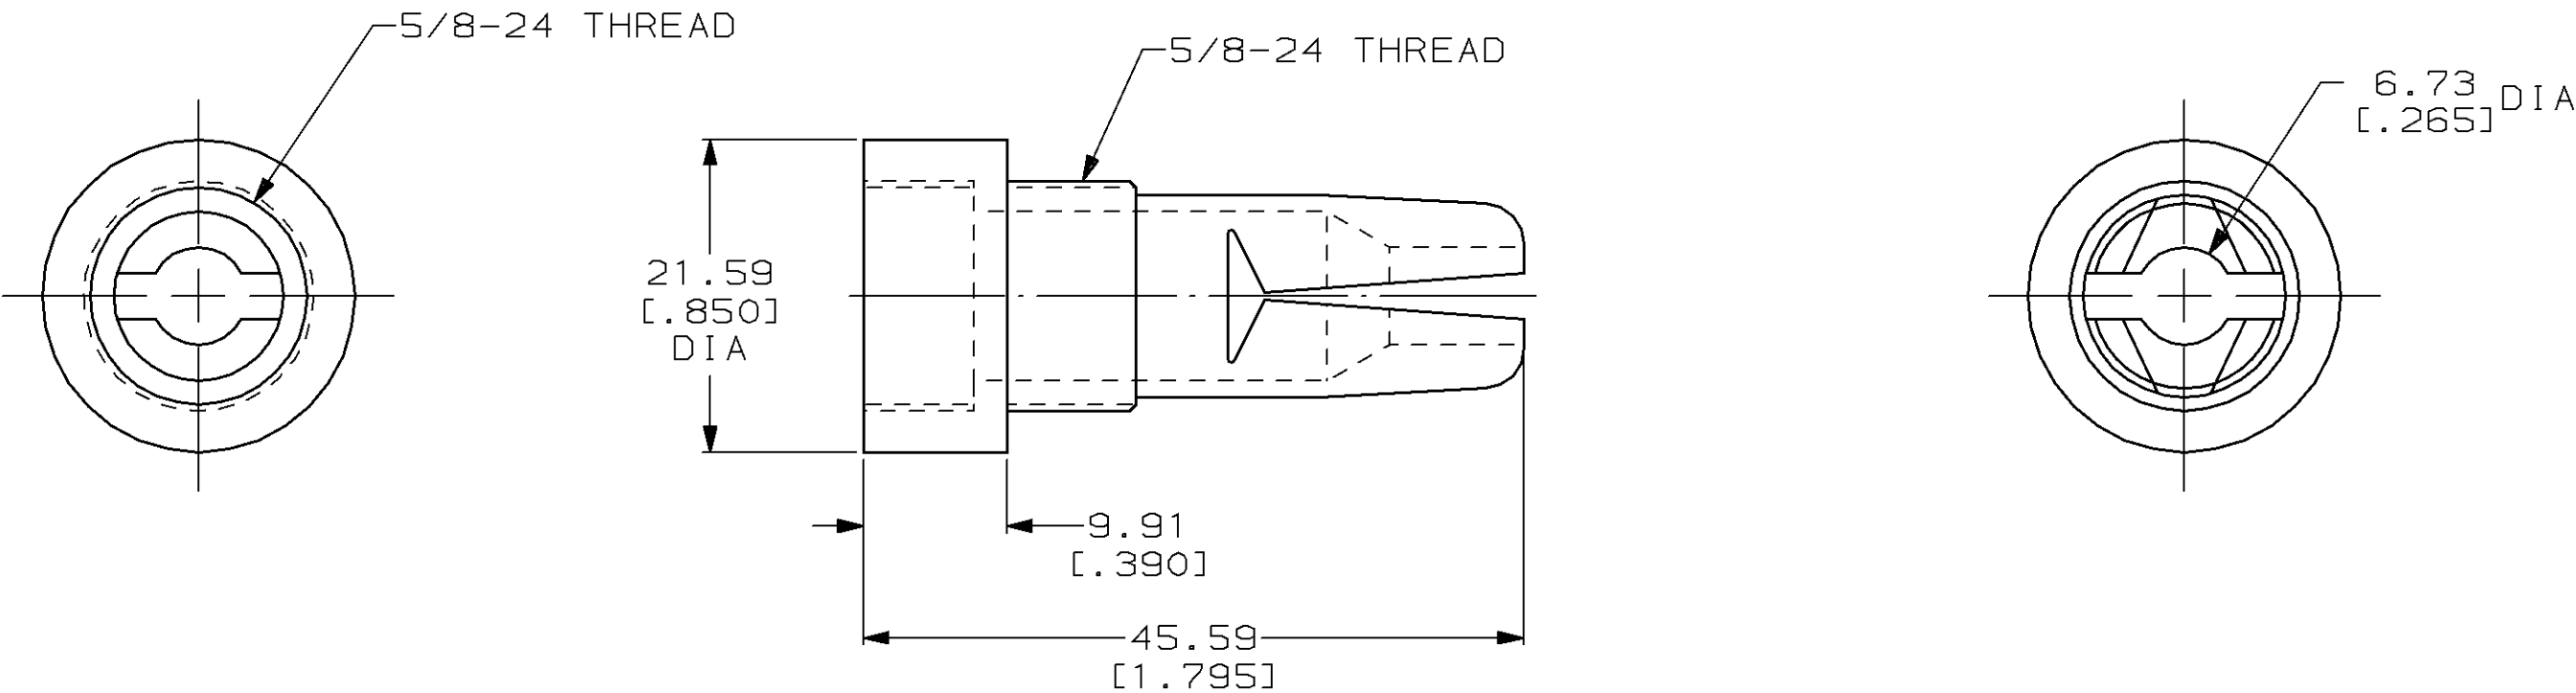

1. ACCEPTS CABLE RANGE FROM 3.81 [.150]
TO 6.35 [.250] WHEN USED WITH FLEXIBLE
BOOT 207489-1.

THIS DRAWING IS A CONTROLLED DOCUMENT FOR
AMP INCORPORATED. IT IS SUBJECT TO CHANGE
AND THE CONTROLLING ENGINEERING ORGANIZATION
SHOULD BE CONTACTED FOR THE LATEST REVISION.

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON: 2 PLC DEC ± 0.13 [.005] 3 PLC DEC ± - ANGLES ± -			DR 06/20/94 K.FOLTZ	AMP AMP Incorporated Harrisburg, PA 17105-3608	
MATERIAL THERMOPLASTIC, COLOR: BLACK			CHK 06/24/94 R.STONE		
FINISH -			APPD 08/09/94 A.FRANTUM	NAME CABLE GRIP, INTERNAL SIZE 11, CPC	
			APPD 08/09/94 A.FRANTUM	SIZE B	CAGE CODE 00779
			PRODUCT SPEC -	DRAWING NO C-207490	
			APPLICATION SPEC -	SCALE 2:1	SHEET 1 OF 1
			WEIGHT -		