

# ***TPS6420xEVM-023***

## *User's Guide*

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Following are URLs where you can obtain information on other Texas Instruments products & application solutions:

| <b>Products</b>  |                                                                    | <b>Applications</b> |                                                                          |
|------------------|--------------------------------------------------------------------|---------------------|--------------------------------------------------------------------------|
| Amplifiers       | <a href="http://amplifier.ti.com">amplifier.ti.com</a>             | Audio               | <a href="http://www.ti.com/audio">www.ti.com/audio</a>                   |
| Data Converters  | <a href="http://dataconverter.ti.com">dataconverter.ti.com</a>     | Automotive          | <a href="http://www.ti.com/automotive">www.ti.com/automotive</a>         |
| DSP              | <a href="http://dsp.ti.com">dsp.ti.com</a>                         | Broadband           | <a href="http://www.ti.com/broadband">www.ti.com/broadband</a>           |
| Interface        | <a href="http://interface.ti.com">interface.ti.com</a>             | Digital Control     | <a href="http://www.ti.com/digitalcontrol">www.ti.com/digitalcontrol</a> |
| Logic            | <a href="http://logic.ti.com">logic.ti.com</a>                     | Military            | <a href="http://www.ti.com/military">www.ti.com/military</a>             |
| Power Mgmt       | <a href="http://power.ti.com">power.ti.com</a>                     | Optical Networking  | <a href="http://www.ti.com/opticalnetwork">www.ti.com/opticalnetwork</a> |
| Microcontrollers | <a href="http://microcontroller.ti.com">microcontroller.ti.com</a> | Security            | <a href="http://www.ti.com/security">www.ti.com/security</a>             |
|                  |                                                                    | Telephony           | <a href="http://www.ti.com/telephony">www.ti.com/telephony</a>           |
|                  |                                                                    | Video & Imaging     | <a href="http://www.ti.com/video">www.ti.com/video</a>                   |
|                  |                                                                    | Wireless            | <a href="http://www.ti.com/wireless">www.ti.com/wireless</a>             |

Mailing Address: Texas Instruments  
Post Office Box 655303 Dallas, Texas 75265

## EVM IMPORTANT NOTICE

Texas Instruments (TI) provides the enclosed product(s) under the following conditions:

This evaluation kit being sold by TI is intended for use for **ENGINEERING DEVELOPMENT OR EVALUATION PURPOSES ONLY** and is not considered by TI to be fit for commercial use. As such, the goods being provided may not be complete in terms of required design-, marketing-, and/or manufacturing-related protective considerations, including product safety measures typically found in the end product incorporating the goods. As a prototype, this product does not fall within the scope of the European Union directive on electromagnetic compatibility and therefore may not meet the technical requirements of the directive.

Should this evaluation kit not meet the specifications indicated in the EVM User's Guide, the kit may be returned within 30 days from the date of delivery for a full refund. THE FOREGOING WARRANTY IS THE EXCLUSIVE WARRANTY MADE BY SELLER TO BUYER AND IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED, IMPLIED, OR STATUTORY, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE.

The user assumes all responsibility and liability for proper and safe handling of the goods. Further, the user indemnifies TI from all claims arising from the handling or use of the goods. Please be aware that the products received may not be regulatory compliant or agency certified (FCC, UL, CE, etc.). Due to the open construction of the product, it is the user's responsibility to take any and all appropriate precautions with regard to electrostatic discharge.

EXCEPT TO THE EXTENT OF THE INDEMNITY SET FORTH ABOVE, NEITHER PARTY SHALL BE LIABLE TO THE OTHER FOR ANY INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES.

TI currently deals with a variety of customers for products, and therefore our arrangement with the user **is not exclusive**.

TI assumes **no liability for applications assistance, customer product design, software performance, or infringement of patents or services described herein**.

Please read the EVM User's Guide and, specifically, the EVM Warnings and Restrictions notice in the EVM User's Guide prior to handling the product. This notice contains important safety information about temperatures and voltages. For further safety concerns, please contact the TI application engineer.

Persons handling the product must have electronics training and observe good laboratory practice standards.

No license is granted under any patent right or other intellectual property right of TI covering or relating to any machine, process, or combination in which such TI products or services might be or are used.

Mailing Address:

Texas Instruments  
Post Office Box 655303  
Dallas, Texas 75265

## **EVM WARNINGS AND RESTRICTIONS**

It is important to operate this EVM within the input voltage range of 3.3 V to 6 V.

Exceeding the specified input range may cause unexpected operation and/or irreversible damage to the EVM. If there are questions concerning the input range, please contact a TI field representative prior to connecting the input power.

Applying loads outside of the specified output range may result in unintended operation and/or possible permanent damage to the EVM. Please consult the EVM User's Guide prior to connecting any load to the EVM output. If there is uncertainty as to the load specification, please contact a TI field representative.

During normal operation, some circuit components may have case temperatures greater than 125°C. The EVM is designed to operate properly with certain components above 125°C as long as the input and output ranges are maintained. These components include but are not limited to linear regulators, switching transistors, pass transistors, and current sense resistors. These types of devices can be identified using the EVM schematic located in the EVM User's Guide. When placing measurement probes near these devices during operation, please be aware that these devices may be very warm to the touch.

Mailing Address:

Texas Instruments  
Post Office Box 655303  
Dallas, Texas 75265

## Preface

# Read This First

---

---

---

---

### ***About This Manual***

This users guide describes the characteristics, operation, and use of the TPS6420xEVM-023 evaluation module (EVM). This EVM contains Texas Instruments high-efficiency non-synchronous buck controller that is configured to provide a regulated 3.3-V output voltage and up to 2 A of current. The users guide includes EVM specifications, test results, schematic diagram, bill of materials (BOM), and recommended test setup.

### ***How to Use This Manual***

This document contains the following chapters:

- ☐ Chapter 1 – Introduction
- ☐ Chapter 2 – EVM Operation
- ☐ Chapter 3 – Board Layout
- ☐ Chapter 4 – Bill of Materials and Schematic

### ***Related Documentation From Texas Instruments***

SLVS485 – TPS6420x data sheet

### ***If you need Assistance***

Contact your local TI sales representative.

### ***FCC Warning***

This equipment is intended for use in a laboratory test environment only. It generates, uses, and can radiate radio frequency energy and has not been tested for compliance with the limits of computing devices pursuant to subpart J of part 15 of FCC rules, which are designed to provide reasonable protection against radio frequency interference. Operation of this equipment in other environments may cause interference with radio communications, in which case the user at his own expense will be required to take whatever measures may be required to correct this interference.

**Trademark**

Powermite is a registered trademark of Microsemi Corporation.

---

# Contents

---

---

---

|          |                                        |            |
|----------|----------------------------------------|------------|
| <b>1</b> | <b>Introduction</b>                    | <b>1-1</b> |
| 1.1      | Background                             | 1-2        |
| 1.2      | Performance Specification Summary      | 1-2        |
| 1.3      | Modifications                          | 1-2        |
| <b>2</b> | <b>EVM Operation</b>                   | <b>2-1</b> |
| 2.1      | Input/Output Connect                   | 2-2        |
| 2.1.1    | J1-Vin                                 | 2-2        |
| 2.1.2    | J2-GND                                 | 2-2        |
| 2.1.3    | JP1-Enable                             | 2-2        |
| 2.1.4    | J3-Vout                                | 2-2        |
| 2.1.5    | J4-GND                                 | 2-2        |
| 2.2      | Test Setup                             | 2-3        |
| 2.3      | Test Results                           | 2-3        |
| <b>3</b> | <b>Board Layout</b>                    | <b>3-1</b> |
| 3.1      | Layout                                 | 3-2        |
| <b>4</b> | <b>Bill of Materials and Schematic</b> | <b>4-1</b> |
| 4.1      | Bill of Materials                      | 4-2        |
| 4.2      | Schematic                              | 4-3        |

# Figures

|     |                             |     |
|-----|-----------------------------|-----|
| 2-1 | TPS64202 Efficiency .....   | 2-3 |
| 3-1 | Top Assembly Layer .....    | 3-2 |
| 3-2 | Top Layer Routing .....     | 3-2 |
| 3-3 | Bottom Layer Routing .....  | 3-3 |
| 4-1 | TPS6420xEVM Schematic ..... | 4-3 |

# Tables

|     |                                         |     |
|-----|-----------------------------------------|-----|
| 1-1 | Device Summary .....                    | 1-2 |
| 1-2 | Performance Specification Summary ..... | 1-2 |
| 4-1 | Bill of Materials .....                 | 4-2 |

# Introduction

---

---

---

This chapter contains background information for the TPS6420xEVM-023 evaluation module.

| Topic                                       | Page |
|---------------------------------------------|------|
| 1.1 Background .....                        | 1-2  |
| 1.2 Performance Specification Summary ..... | 1-2  |
| 1.3 Modifications .....                     | 1-2  |

## 1.1 Background

This TPS6420xEVM uses a TPS64202 step down controller, external p-channel FET, and Schottky diode. Although the TPS64202 input voltage range is 1.8 V to 6 V, this EVM was configured to provide 2 A at 3.3 V<sub>OUT</sub>, so the input voltage is limited to 3.3 V to 6 V. The goal of the EVM is to demonstrate the small size of the TPS6420x power supply solution and provide flexibility in interchanging the supporting passive components.

The TPS64202 was selected for this application because unlike the other members of the TPS6420x family, the TPS64202's switching frequency is determined by its minimum off time which, for applications where  $V_I \cong V_O$ , results in a high switching frequency and thus small inductor. Table 1–1 below aids in selecting the correct TPS6420x device.

Table 1–1. Device Summary

| Input to Output Voltage Ratio                                       | Switching Frequency Determined By | Proposed Device For High Switching Frequency | Proposed Device For Low Switching Frequency |
|---------------------------------------------------------------------|-----------------------------------|----------------------------------------------|---------------------------------------------|
| $V_I \gg V_O$ (e.g. $V_I = 5\text{ V}$ $V_O = 1.5\text{ V}$ )       | Minimum on-time                   | TPS64203                                     | TPS64200, TPS64201                          |
| $V_I \approx V_O$ (e.g. $V_I = 3.8\text{ V}$ $V_O = 3.3\text{ V}$ ) | Minimum off-time                  | TPS64202                                     | TPS64200, TPS64201                          |

## 1.2 Performance Specification Summary

Table 1–2 provides a summary of the TPS6420xEVM performance specifications. All specifications are given for an ambient temperature of 25°C.

Table 1–2. Performance Specification Summary

| Specification       | Test Conditions | Min | Typ | Max | Unit |
|---------------------|-----------------|-----|-----|-----|------|
| Input voltage range | TPS64202EVM     | 3.3 |     | 6   | V    |
| Output voltage      | TPS64202EVM     |     | 3.3 |     | V    |
| Output current      |                 | 0   |     | 2   | A    |

## 1.3 Modifications

The primary goal of this EVM is to demonstrate operation of the TPS6420x in a power supply solution. To facilitate user customization of the EVM, the board was designed with 603 or larger sized components, spaced further apart than necessary. So, a real implementation would likely occupy less total board space.

Any of the TPS6420x ICs can be placed on the EVM. In addition, the EVM has the following characteristics to allow user customization:

- ☐ Two PMOS control FET footprints: SOT23 (top) and 1206-8 ChipFET (bottom)
- ☐ Two Schottky diode footprints: Powermite® (top) and SMA (bottom)

- ☐ Large inductor area under removable solder mask
- ☐ Extra input and output capacitor pads
- ☐ Resistors R6 and R7 can be left open and R5 can be shorted (by a 0  $\Omega$  resistor) to allow current sensing by Q1's  $r_{DS(on)}$ .
- ☐ Resistor R8 and capacitor C7 can be populated to provide an RC snubber which dampens the oscillations and resulting EMI produced at the switch node when the device operates in discontinuous mode.
- ☐ The TPS6420x family of devices work best using an output capacitor with between 50 to 150 m $\Omega$  of ESR. However, they will work with low ESR ceramic output capacitors if a large resistor is placed from the SW node to the FB node as explained on the last page of the datasheet application section. Resistor R8 can be used as this large resistor since one side already connects to the SW node, if the other side is manually connected to the FB node using a small wire.

Changing components can improve or degrade EVM performance. For example, using a FET with higher  $r_{DS(on)}$  and/or an inductor with larger dc resistance will lower the efficiency of the solution. In addition, using a FET in a larger package with larger gate capacitance will likely lower efficiency since the TPS6420x's gate drive limited to 150 mA, would have difficulty driving a larger gate capacitance.

# EVM Operation

---

---

---

This chapter describes how to properly test the TPS64202 using the TPS6420xEVM.

| Topic                              | Page |
|------------------------------------|------|
| 2.1 Input/Output Connections ..... | 2-2  |
| 2.2 Test Setup .....               | 2-3  |
| 2.2 Test Results .....             | 2-3  |

## **2.1 Input/Output Connect**

The EVM connection points are described in the following paragraphs.

### **2.1.1 J1–Vin**

This is the positive connection to the input power supply. The leads to the input supply should be twisted and kept as short as possible.

### **2.1.2 J2–GND**

This is the return connection to the input power supply.

### **2.1.3 JP1–Enable**

This is the enable pin of the device. The enable pin is pulled up to Vin by an onboard pullup resistor. Placing a jumper across pins 2–3 of J1 shorts the enable pin to GND; thereby enabling the device. Placing a jumper across pins 1–2 of J1 connects the enable pin to Vin and disables the device.

### **2.1.4 J3–Vout**

This is the positive output for the device.

### **2.1.5 J4–GND**

This is the return connection for the load.


## 2.2 Test Setup

The absolute maximum input voltage is 7 V. The TPS62402, with  $V_O = 3.3$  V, is designed to operate with a maximum input voltage of 6 V. Connect a power supply with output voltage between 3.3 V and 6 V and current limit set to at least 1.3 times the expected maximum output current, or for this EVM, 2.6 A. Short pins 2–3 on jumper JP1 (labeled ON) to enable the device. Connect a load not to exceed 2.0 A to the output of the EVM.

## 2.3 Test Results

Below are the efficiency results using this EVM:

Figure 2–1. TPS64202 Efficiency

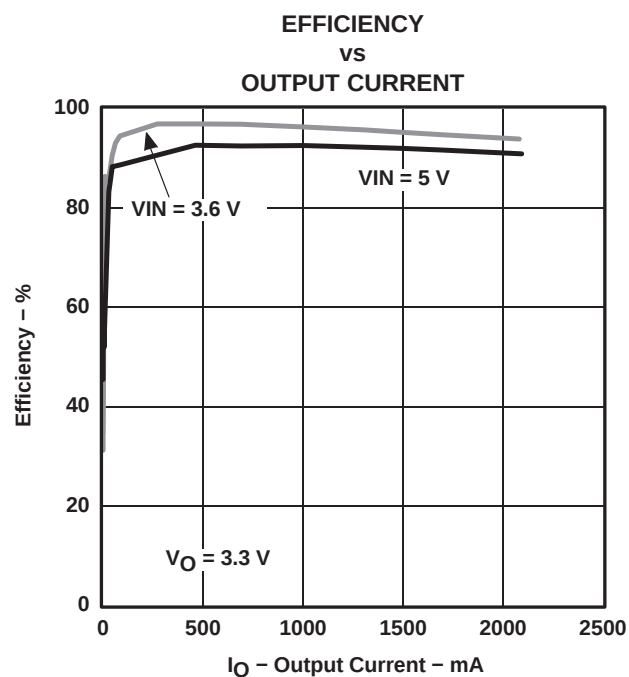

# Board Layout

---

---

---

This chapter provides the TPS6420xEVM board layout and illustrations.

| Topic            | Page |
|------------------|------|
| 3.1 Layout ..... | 3-2  |

### 3.1 Layout

Board layout is critical for all switch mode power supplies. Figures 3–1, 3–2, and 3–3 show the board layout for the HPA023 PWB. The switching nodes with high frequency noise are isolated from the noise sensitive feedback circuitry and careful attention has been given to the routing of high frequency current loops. Refer to the data sheet for more specific layout guidelines.

Figure 3–1. Top Assembly Layer



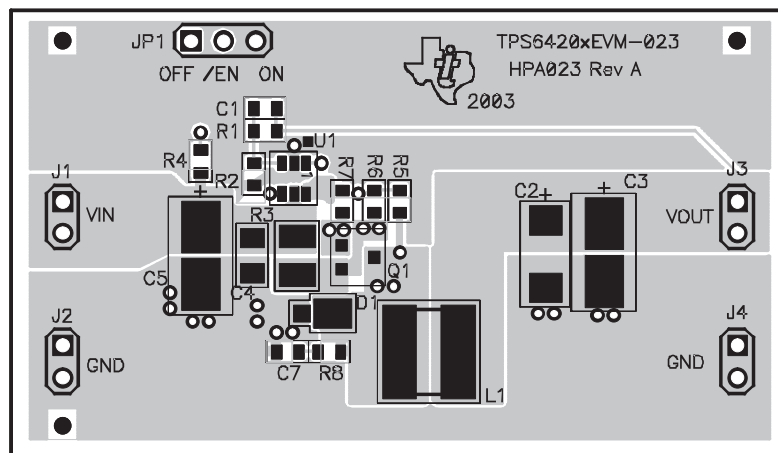


Figure 3–2. Top Layer Routing



*Figure 3-3. Bottom Layer Routing*

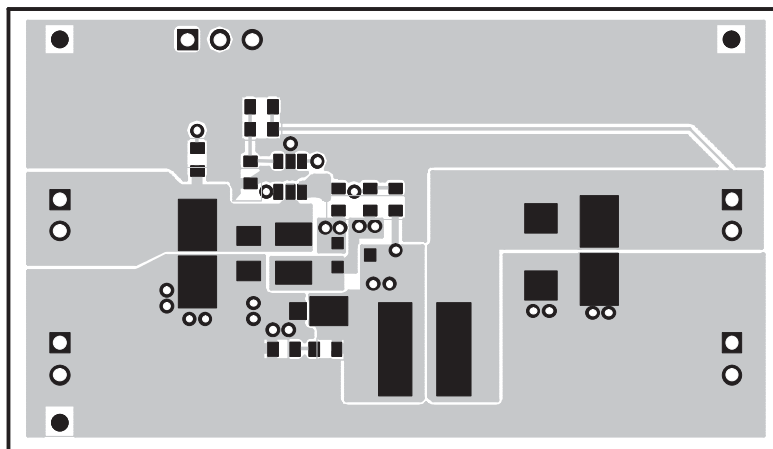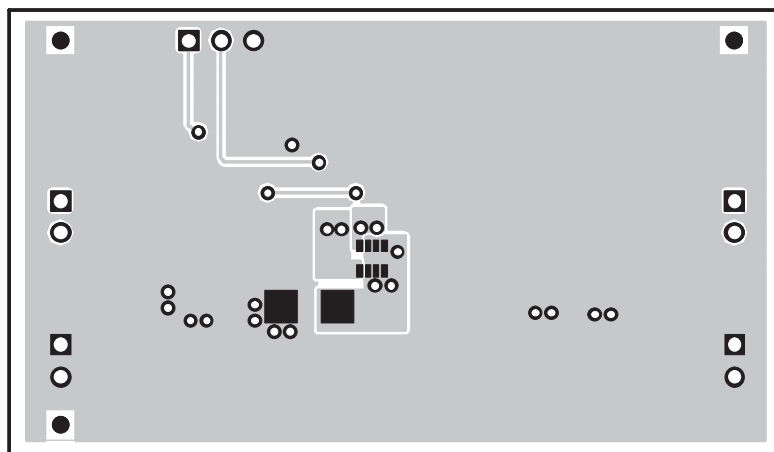

---

# Bill of Materials and Schematic

---

---

---

This chapter provides the TPS6420xEVM-023 bill of materials and schematic.

| Topic                       | Page |
|-----------------------------|------|
| 4.1 Bill of Materials ..... | 4-2  |
| 4.2 Schematic .....         | 4-3  |

## 4.1 Bill of Materials

Table 4–1. Bill of Materials

| Count | RefDes         | Description                                                 | Size        | MFR               | Part Number     |
|-------|----------------|-------------------------------------------------------------|-------------|-------------------|-----------------|
| 1     | C1             | Capacitor, ceramic, 4.7 $\mu$ F, 50 V, C0G, $\pm$ 10%       | 603         | TKD               | C1608X7R1H4R7DT |
| 1     | C2             | Capacitor, POSCAP, 4.7 $\mu$ F, 6.3 V, 100 m $\Omega$ , 20% | 6032(C)     | Sanyo             | 6TPA47M         |
| 1     | C3, C5         | Capacitor, Multi-pattern, 603-D case                        | 7343 (D)    |                   |                 |
| 1     | C4             | Capacitor, ceramic, 10 $\mu$ F, 10 V, X7R, $\pm$ 10%        | 1206        | TDK               | C3216X7R1A106KT |
| 0     | C7             | Capacitor, ceramic, XXX $\mu$ F, XX V                       | 603         |                   |                 |
| 1     | D1             | Diode, Schottky, 1 A, 20 V                                  | 457-04      | On Semi           | MBRM120         |
| 4     | J1, J2, J3, J4 | Header, 2 pin, 100 mil spacing, (36-pin strip)              | 0.100 x 2"  | Sullins           | PTC36SAAN       |
| 1     | JP1            | Header, 3 pin, 100 mil spacing, (36-pin strip)              | 0.100 x 3"  | Sullins           | PTC36SAAN       |
| 1     | L1             | Inductor, SMT, 5 $\mu$ H, 2.9 A, 24 m $\Omega$              | 0.264x0.264 | Sumida            | CDRH6D38–5R0    |
| 1     | Q1             | MOSFET, Pch, –20 V, –3.5 A, 68 m $\Omega$                   | SOT23       | Siliconix         | Si2323          |
| 1     | R1             | Resistor, chip, 619 k $\Omega$ , 1/16 W, 1%                 | 603         | Std               | Std             |
| 1     | R2             | Resistor, chip, 356 k $\Omega$ , 1/16 W, 1%                 | 603         | Std               | Std             |
| 1     | R3             | Resistor, chip, 0.033 $\Omega$ , 1/4 W, 1%                  | 1210        | Std               | Std             |
| 1     | R4             | Resistor, chip, 100 k $\Omega$ , 1/16 W, 1%                 | 603         | Std               | Std             |
| 1     | R5             | Resistor, chip, XX $\Omega$ , 1/16 W                        | 603         |                   |                 |
| 1     | R6, R7         | Resistor, chip, 0 $\Omega$ , 1/16 W, 1%                     | 603         | Std               | Std             |
| 1     | R8             | Resistor, chip, XX $\Omega$ , 1/16 W, 1%                    | 603         |                   |                 |
| 1     | U1             | IC, Step-down controller                                    | SOT23–6     | Texas Instruments | TPS64202DBV     |
| 1     | —              | PCB, 2.42 In x 1.395 In x 0.062 In                          |             | Any               | HPA023          |
| 1     | —              | Shunt, 100 mil, black                                       | 0.100       | 3M                | 929950–00       |



---