

Product Overview



Features

-
-
-
-
-
-
-
-
-
-





Typical Applications

-
-
-
-
-
-
-
-
-
-

Specifications

Mechanical

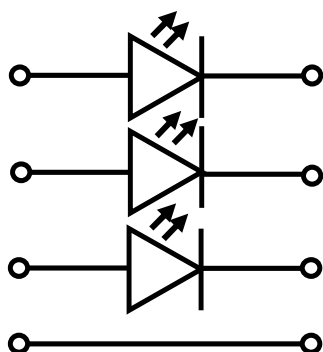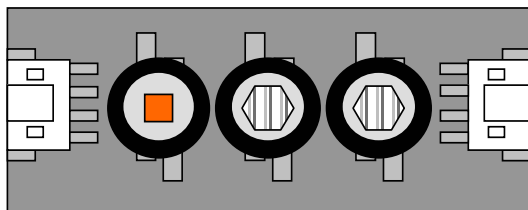



Electrical

Environmental

Notes

-
-
-

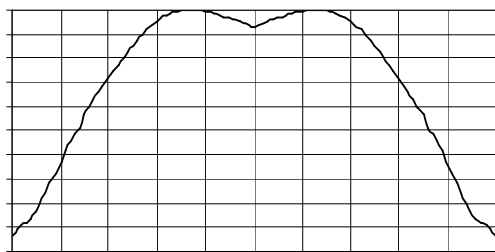

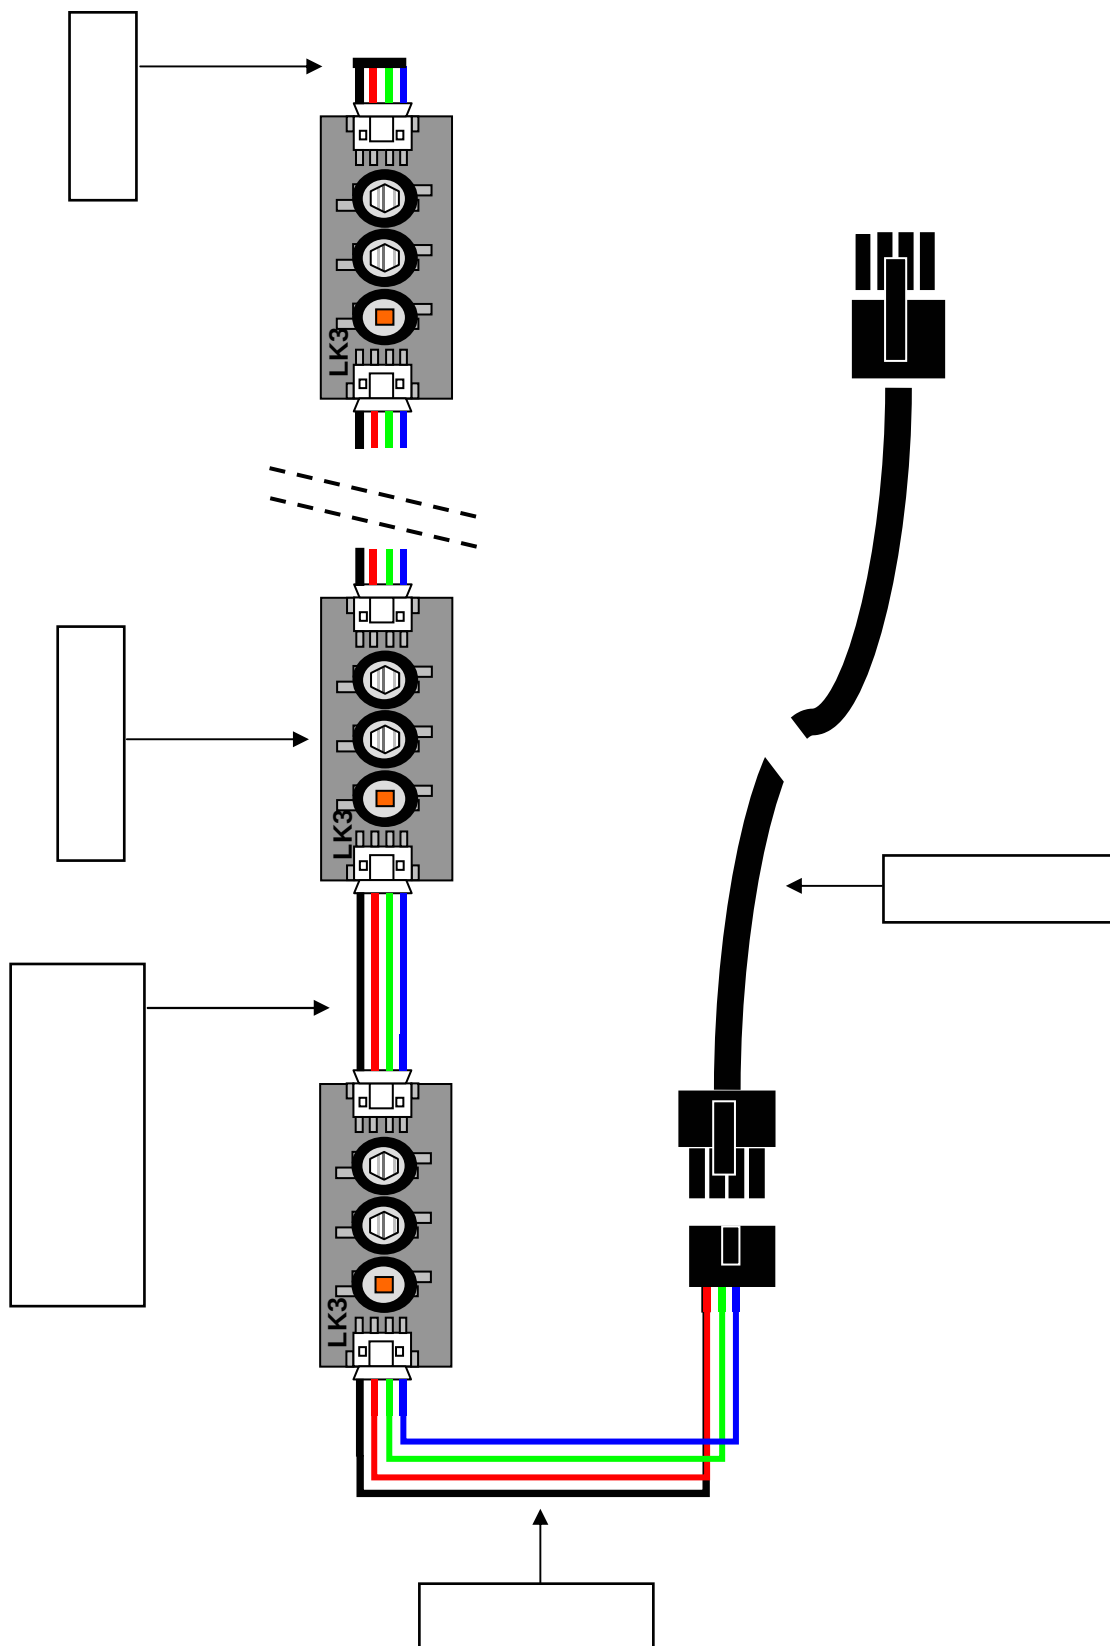



LinkLED™ RGB

Selection Guide

Part No Description
LK3-RGB LINKLED Single LED 1 Watt X= Colour

	X=			
	B			
	G			
	R			

Accessories

Part No Description
CT4-100 100mm female to female linking lead
CT4-200 200mm female to female linking lead
CT4-MLXF CT4 – Molex Female
CT4-C Common connector for end of series
CDL-M3M Colourdriver 3m male to male lead

LK-HS12 12 module 1.2 meter flexible heat-sink

Other lengths of linking lead available to
special order

Contact
Lumidrives Ltd

Tel

www.Lumidrives.com

For application information and data on our range of suitable drivers, visit www.Lumidrives.com

