

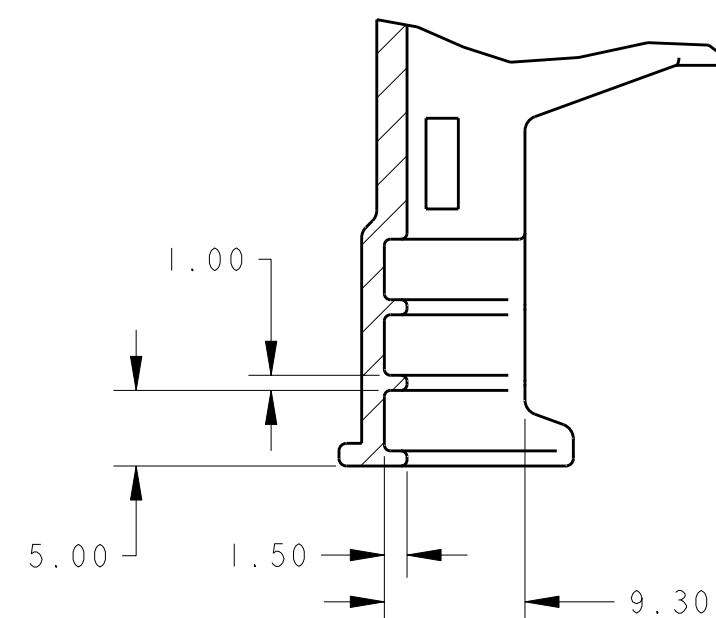
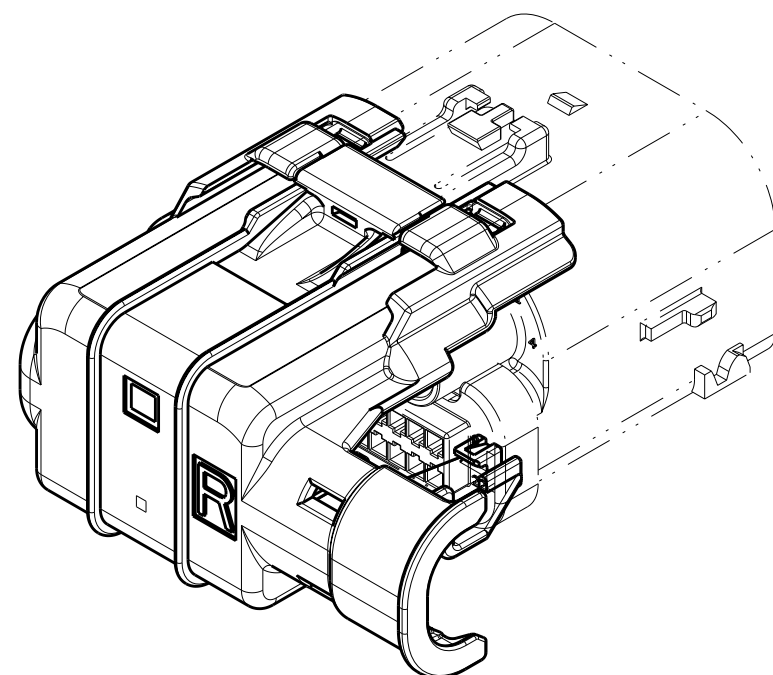
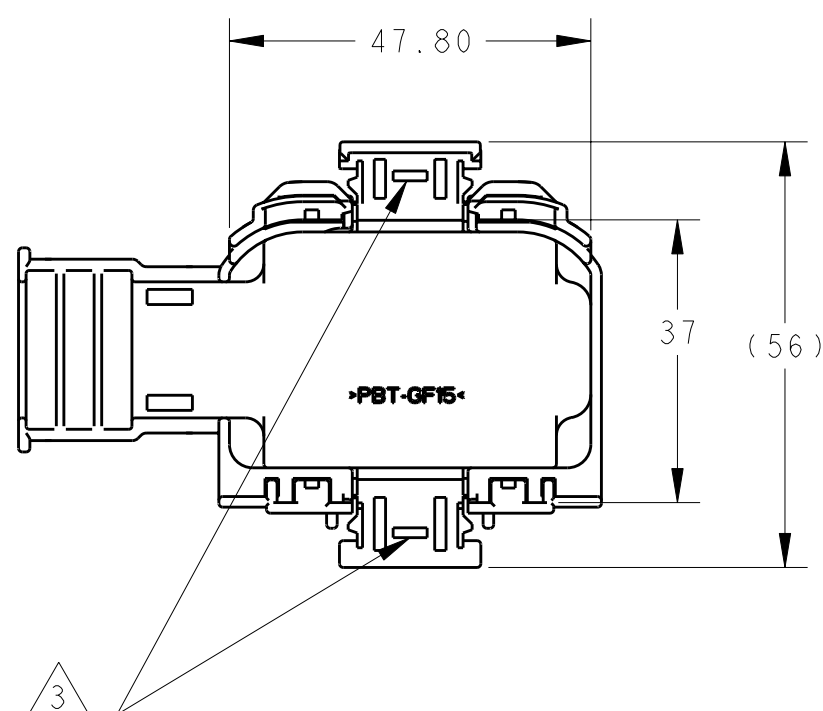


LOC	DIST	REVISIONS					
IN	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			A	RELEASED PER ECR 07-006597	22MAR2007	MHB	MHB
			AI	REVISED PER ECO-10-014244	08JUL2010	DL D	DL D

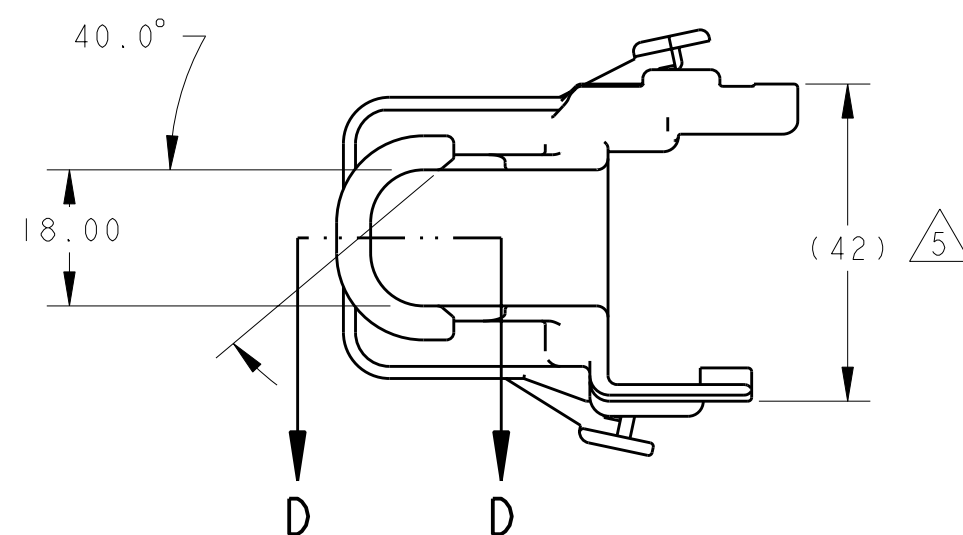

SECTION D-D 
SCALE 2:1

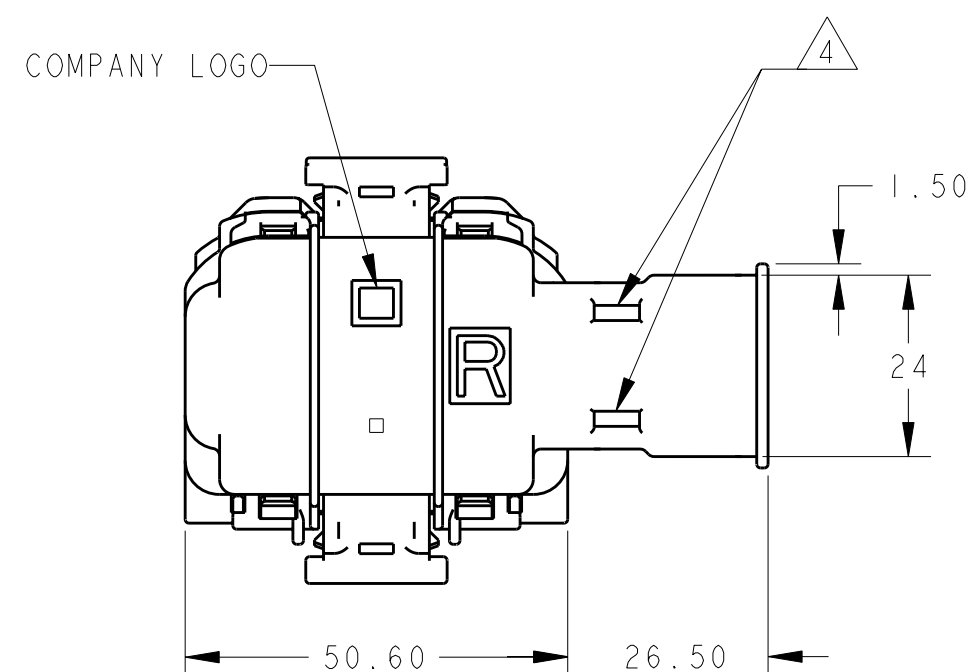

1. THIS WIRE GUIDE USED WITH 34 WAY MALE CAP ASSEMBLY
SEE TYCO ELECTRONICS DRAWING 1587042.
(PURCHASED SEPARATELY)
2. FEATURE DESIGNED TO ACCOMMODATE PLASTIC CONVOLUTE.
3. FEATURE TO ACCOMMODATE STRAIGHT SLOT SCREW DRIVER AS
A PRY POINT.
4. FEATURE TO ACCOMMODATE WIRE TIE.
5. MEASURED AT TANGENT AS SHROUD WILL BOW IN.
6. THIS COMPONENT DESIGNED TO SATISFY THE REQUIREMENTS
OF USCAR-2, REVISION 4 AS NOTED BELOW:

PARA 5.4.5 MISC COMPONENT ENGAGE/DISENGAGE FORCE
60N MAX ENGAGE
110N MIN REMOVE (STRAIGHT AXIAL PULL)

PARA 5.4.8 CONNECTOR DROP TEST.

AS SHOWN	1456722-1
DESCRIPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TWO ELECTRONICS CORPORATION IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN F KINSEY 13JUN2006 CHK F KINSEY 13JUN2006 APVD F KINSEY 13JUN2006		 Tyco Electronics Harrisburg, PA 17105-3608	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
		PRODUCT SPEC -		WIRE DRESS, 34 POSITION, CAP, RIGHT WIRE EXIT	
MATERIAL		APPLICATION SPEC -		SIZE	CAGE CODE
PBT-GF15		WEIGHT 21.85 g		DRAWING NO A200779	RESTRICTED TO -
BLACK		CUSTOMER DRAWING		SCALE	SHEET OF
				REV A	