

OBSOLETE PRODUCT

Last time buy: August 31, 2014.

[Click Here For Obsolescence Notice of February 2014.](#)

PRODUCT OVERVIEW

The HB01UYC Series offers a wide selection of input and output voltages to choose from. Each model is offered in a 24-pin DIP package and has an input to output isolation rating of 2500Vrms making it ideal for applications requiring high isolation. The dielectric withstand characteristics of each converter are measured in production to ensure barrier integrity.

The HB01UYC Series is ideal for applications where the output is susceptible to high voltage transients, such as motor drive and industrial process control applications. The low barrier capacitance gives excellent input to output dV/dt characteristics thus protecting the input control circuitry from peak transients appearing on the output.

The HB01UYC Series uses a self-oscillating circuit design technology to realize low cost and high performance. The inherent current limiting capability of the high isolation design reduces high current stresses during start-up thus increasing the capacitive load capability while maintaining high reliability.

As with all of our DC/DC converters, surface mount construction combined with extensive qualification testing assures low cost without sacrificing quality and reliability.

FEATURES

- RoHS Compliant
- High Isolation
- 2500vrms Isolation Test Voltage
- Barrier 100% Production Tested
- Low Barrier Capacitance - 10pf
- Low Leakage Current - 2ma Max
- 24-Pin Dip
- Internal Filtering
- Non-Conductive Case
- Low Cost
- Low Profile - .375"

APPLICATIONS

- Industrial Process Control
- Dc Motor Drive
- Intrinsic Safety Systems
- Ground Loop Elimination
- Medical Equipment
- Portable Test Equipment
- Data Acquisition



ELECTRICAL SPECIFICATIONS

Specifications typical at $T_A = +25^\circ\text{C}$, nominal input voltage, rated output current unless otherwise specified.


MODEL	NOMINAL INPUT VOLTAGE (V _{DC})	RATED OUTPUT VOLTAGE (V _{DC})	RATED OUTPUT CURRENT (mA)	INPUT CURRENT		EFFICIENCY (%)
				MIN LOAD (mA)	RATED LOAD (mA)	
HB01U05S05YC	5	5	200	63	290	68
HB01U05S12YC	5	12	83	63	290	70
HB01U05S15YC	5	15	67	63	290	73
HB01U12S05YC	12	5	200	20	120	68
HB01U12S12YC	12	12	83	20	120	70
HB01U12S15YC	12	15	67	20	114	73
HB01U15S05YC	15	5	200	25	98	68
HB01U15S12YC	15	12	83	25	95	70
HB01U15S15YC	15	15	67	25	90	73
HB01U24S05YC	24	5	200	13	61	68
HB01U24S12YC	24	12	83	13	60	70
HB01U24S15YC	24	15	67	13	57	73
HB01U05D05YC	5	±5	±100	63	290	68
HB01U05D12YC	5	±12	±42	63	285	70
HB01U05D15YC	5	±15	±34	63	275	73
HB01U12D05YC	12	±5	±100	20	123	68
HB01U12D12YC	12	±12	±42	20	118	70
HB01U12D15YC	12	±15	±34	20	114	73
HB01U15D05YC	15	±5	±100	25	98	68
HB01U15D12YC	15	±12	±42	25	95	70
HB01U15D15YC	15	±15	±34	25	90	73
HB01U24D05YC	24	±5	±100	13	61	68
HB01U24D12YC	24	±12	±42	13	60	70
HB01U24D15YC	24	±15	±34	13	57	73

COMMON SPECIFICATIONS

Specifications typical at $T_A = +25^\circ\text{C}$, nominal input voltage, rated output current unless otherwise specified.

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
INPUT					
Voltage Range		4.5 10.8 13.5 20	5 12 15 24 35	5.5 13.2 16.5 30	V _{DC} V _{DC} V _{DC} V _{DC} mAp-p
Reflected Ripple Current					
ISOLATION					
Rated Voltage		3535			V _{DC}
Test Voltage	60 Hz, 10 Seconds	2500			V _{rms}
Resistance			10		GΩ
Capacitance			10		pF
Leakage Current	$V_{ISO} = 240\text{VAC}$, 60Hz		1	2	μArms
OUTPUT					
Rated Power			1		W
Voltage Setpoint Accuracy			±3	±5	%
Temperature Coefficient			±0.02		%/°C
Ripple & Noise	BW = DC to 10MHz BW = 10Hz to 2MHz		50 25		mVp-p mV _{rms}
Line Regulation	High Line to Low Line		±1.5		%/% Vin
Load Regulation	See Performance Curves (Min Load = 5%)				
GENERAL					
Switching Frequency			160		kHz
Package Weight			12		g
MTTF per MIL-HDBK-217, Rev. F	Circuit Stress Method		2,000,000		Hr
Ground Benign	$T_A = +25^\circ\text{C}$				
TEMPERATURE					
Specification		-25		+70	°C
Operation		-40		+85	°C
Storage		-40		+110	°C

MECHANICAL Package/Pinout "Y"

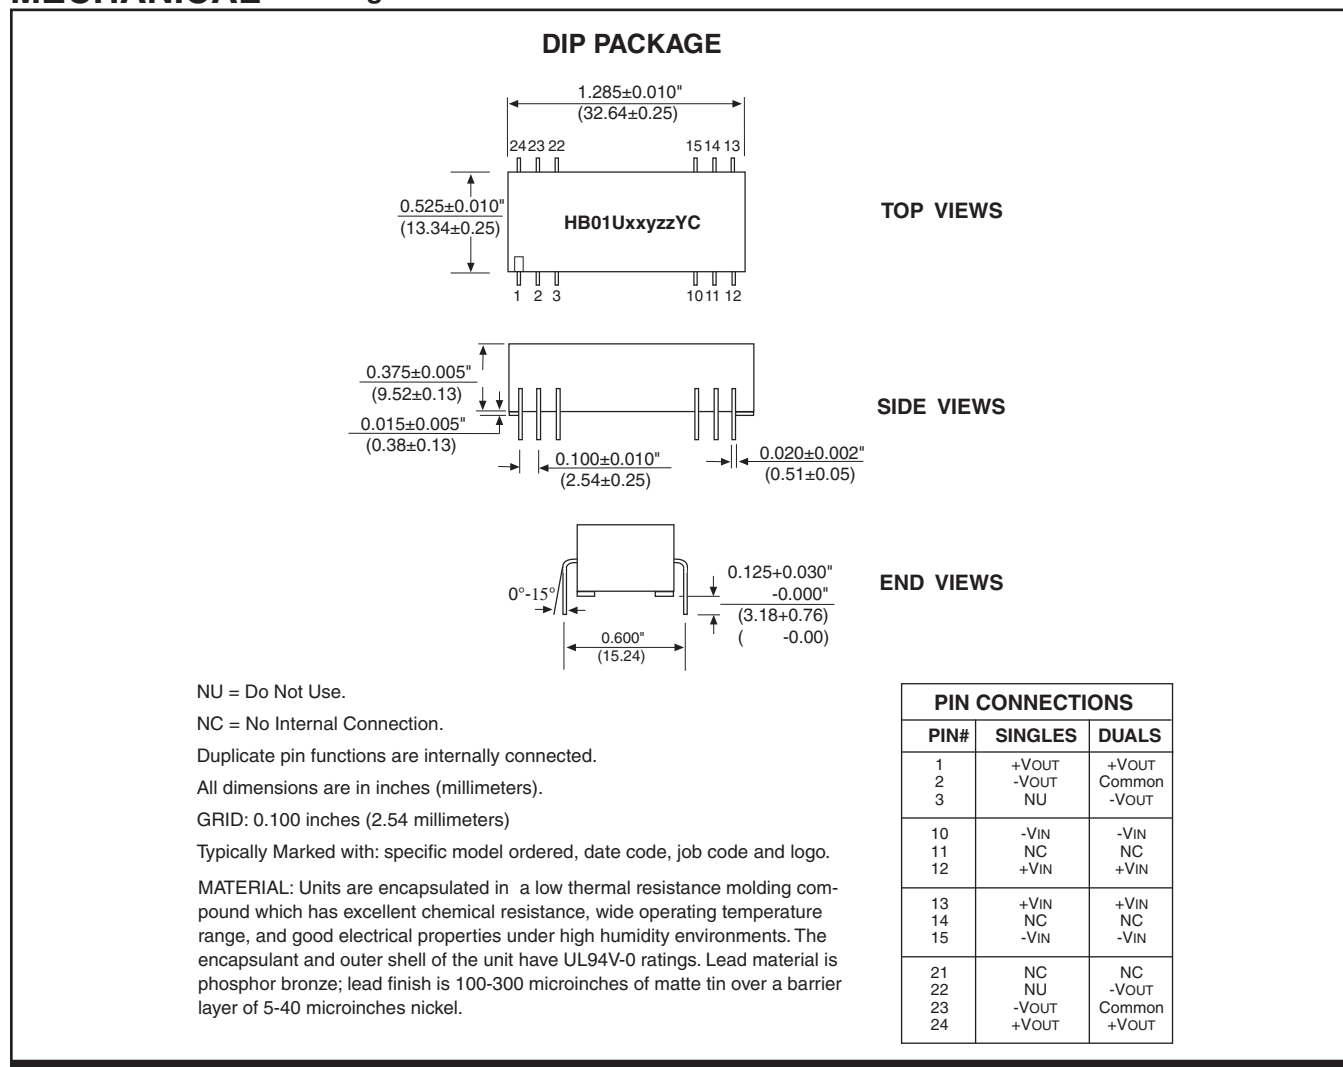

THROUGH-HOLE SOLDERING INFORMATION

These devices are intended for wave soldering or manual soldering.

They are not intended to be subject to surface mount processes under any circumstances.

The normal wave soldering process can be used with these devices where the device is subjected to a maximum wave temperature of 260°C for a period of no more than 10 seconds. Within this time and temperature range, the integrity of the device's plastic body will not be compromised and internal temperatures within the converter will not exceed 175°C. Care should be taken to control manual soldering limits identical to that of wave soldering.

ABSOLUTE MAXIMUM RATINGS

Internal Power Dissipation.....0.5 Watt
 Short Circuit Duration.....5 Min
 Lead Temperature (soldering, 10 seconds max).....+300°C*








*Note: Refer to Reflow Profile for SMD Models.

ORDERING INFORMATION

Device Family **HB01U** **xx** **yy** **zz** **Y** **C**
 HB Indicates DC/DC Converter
 Model Number
 Where:
 xx = Input Voltage
 yy = Number of Outputs (Single "S", Dual "D")
 zz = Output Voltage
 Package Option
 RoHS Compliant

TYPICAL PERFORMANCE CURVES

Specifications typical at $T_A = +25^\circ\text{C}$, nominal input voltage, rated output current unless otherwise specified.

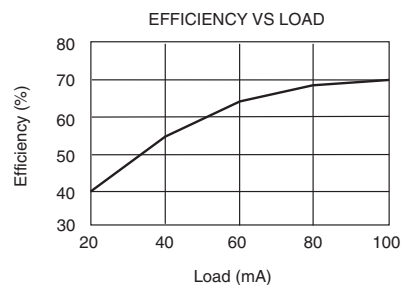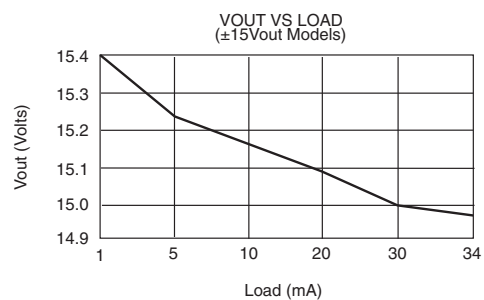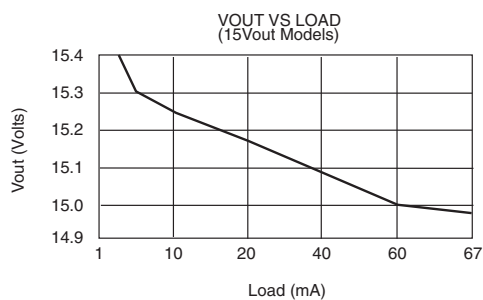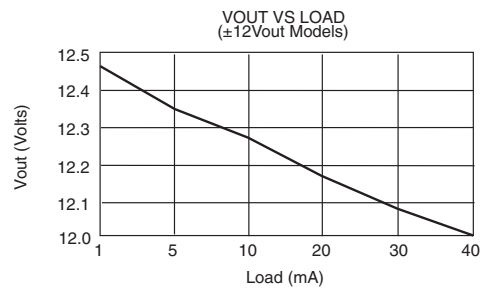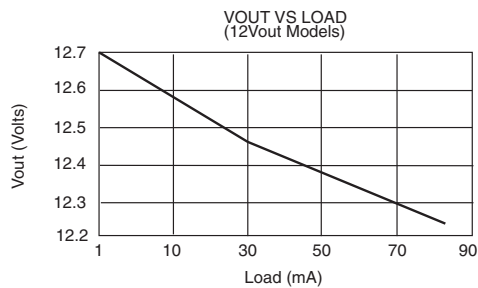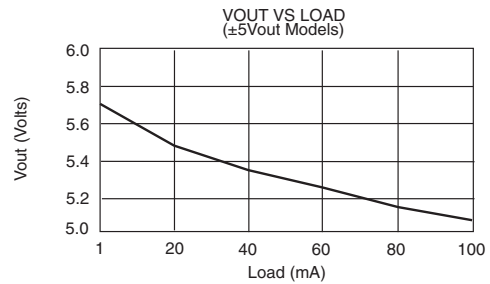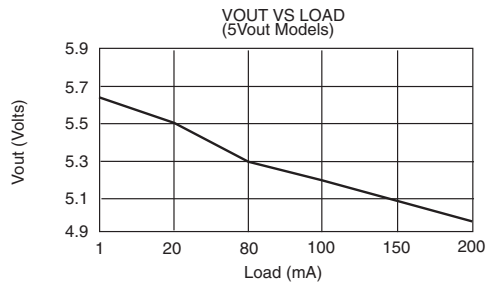

Murata Power Solutions, Inc.
11 Cabot Boulevard, Mansfield, MA 02048-1151 U.S.A.
ISO 9001 and 14001 REGISTERED



This product is subject to the following [operating requirements](#)
and the [Life and Safety Critical Application Sales Policy](#):
Refer to: <http://www.murata-ps.com/requirements/>

Murata Power Solutions, Inc. makes no representation that the use of its products in the circuits described herein, or the use of other technical information contained herein, will not infringe upon existing or future patent rights. The descriptions contained herein do not imply the granting of licenses to make, use, or sell equipment constructed in accordance therewith. Specifications are subject to change without notice.

© 2014 Murata Power Solutions, Inc.