

TOSHIBA Bipolar Linear Integrated Circuit Silicon Monolithic

TA78L05PF, TA78L06PF, TA78L07PF, TA78L08PF, TA78L09PF, TA78L10PF, TA78L12PF, TA78L15PF

5 V, 6 V, 7V, 8 V, 9 V, 10 V, 12 V, 15V

3-Terminal Positive Voltage Regulators


Housed in a very small and thin PS-8 package, the TA78L**PF series of fixed-voltage monolithic integrated circuit voltage regulators is designed for a wide range of applications. One of these regulators can drive up to 0.15 A of output current. The series offers devices with low-output voltages: 5 V, 6 V, 7 V, 8 V, 9 V, 10 V, 12 V, and 15 V.

Features

- Maximum output current: 0.15 A
- Output voltage accuracy: $V_{OUT} \pm 4\%$ (@ $T_j = 25^\circ\text{C}$)
- Protection function: overheating/overcurrent
- Package type: PS-8 is a flat lead, 8-pin package.

This is smaller and thinner than the previous PW-Mini, with a 47% decrease in height and a 54% decrease in mounting area.


- Lead-free products

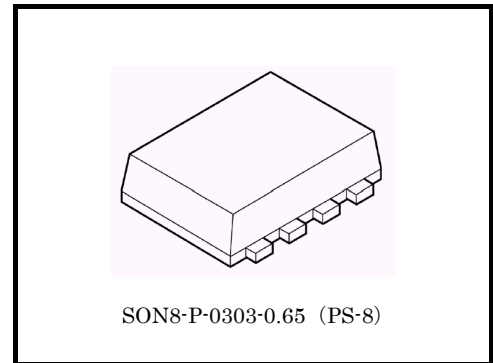

Weight: 0.08 g (typ.)


Pin Assignment/Marking

Product No.	Marking (5 digits)
TA78L05PF	78L05
TA78L06PF	78L06
TA78L07PF	78L07
TA78L08PF	78L08
TA78L09PF	78L09
TA78L10PF	78L10
TA78L12PF	78L12
TA78L15PF	78L15

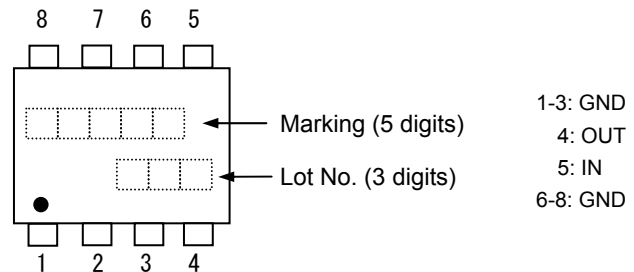

*(ϵ) on the lower left of the marking indicates Pin 1.

* Weekly code: (Three digits)

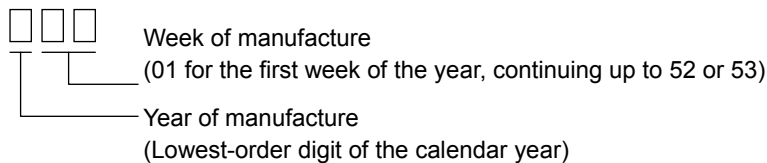


How to Order

Product No.	Packing Type and Unit for Orders
TA78L**PF (TE85L,F)	Embossed-tape packing: 2000 (1 tape)

Note 1: In the actual product number, "***" is replaced by the output voltage of the product.

Block Diagram

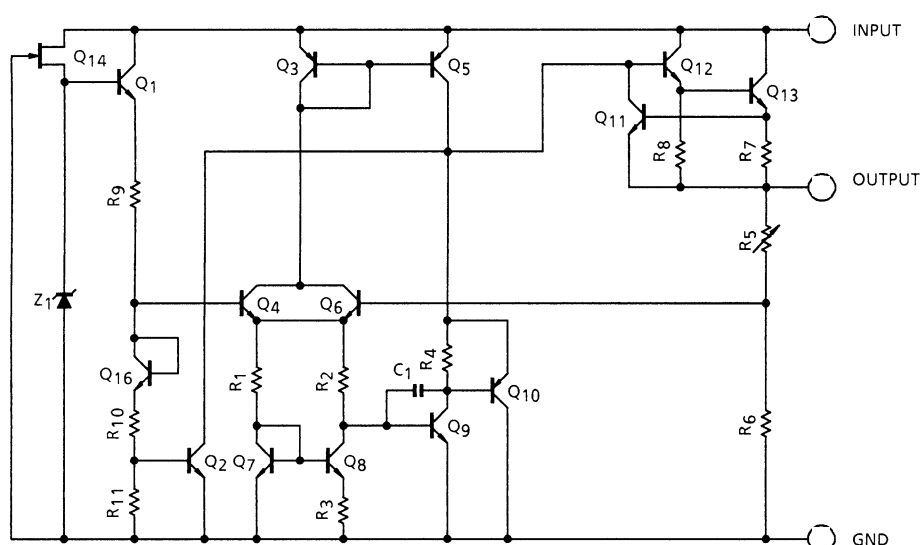

Absolute Maximum Ratings (Ta = 25°C)

Characteristics	Symbol	Rating	Unit
Input voltage	V_{IN}	35	V
Output current	I_{OUT}	0.15	A
Operating temperature	T_{opr}	-30~85	°C
Junction temperature	T_j	150	°C
Storage temperature	T_{stg}	-55~150	°C
Power dissipation (Note 4a)	P_D	1.3	W
Power dissipation (Note 4b)	P_D	0.62	W

Note 2: Do not apply external current and voltage (including negative voltage) to pins other than those specified.

Note 3: Using continuously under heavy loads (e.g. the application of high temperature/current/voltage and the significant change in temperature, etc.) may cause this product to decrease in the reliability significantly even if the operating conditions (i.e. operating temperature/current/voltage, etc.) are within the absolute maximum ratings and the operating ranges.


Please design the appropriate reliability upon reviewing the Toshiba Semiconductor Reliability Handbook ("Handling Precautions"/Derating Concept and Methods) and individual reliability data (i.e. reliability test report and estimated failure rate, etc).

Thermal resistance

Characteristics	Symbol	Rating	Unit
Thermal resistance (junction to ambient) (Note 4a)	$R_{th(j-a)}$	97	°C/W
Thermal resistance (junction to ambient) (Note 4b)	$R_{th(j-a)}$	202	°C/W


Note 4:

(a) Device mounted on a glass-epoxy board



FR-4
 $25.4 \times 25.4 \times 1.6$
 Unit: (mm)
 Cu base thickness
 35 μ m

(b) Device mounted on a glass-epoxy board



FR-4
 $25.4 \times 25.4 \times 1.6$
 Unit: (mm)
 Cu base thickness
 35 μ m

TA78L05PF
Electrical Characteristics

($V_{IN} = 10\text{ V}$, $I_{OUT} = 40\text{ mA}$, $C_{IN} = 0.33\text{ }\mu\text{F}$, $C_{OUT} = 0.1\text{ }\mu\text{F}$, $0^\circ\text{C} \leq T_j \leq 125^\circ\text{C}$, unless otherwise specified)

Characteristics	Symbol	Test Circuit	Test Condition		Min	Typ.	Max	Unit
Output voltage	V _{OUT}	1	T _j = 25°C		4.8	5.0	5.2	V
Line regulation	Reg-line	1	T _j = 25°C	7.0 V ≤ V _{IN} ≤ 20 V	—	55	150	mV
				8.0 V ≤ V _{IN} ≤ 20 V	—	45	100	
Load regulation	Reg-load	1	T _j = 25°C	1.0 mA ≤ I _{OUT} ≤ 100 mA	—	11	60	mV
				1.0 mA ≤ I _{OUT} ≤ 40 mA	—	5.0	30	
Output voltage	V _{OUT}	1	T _j = 25°C	7.0 V ≤ V _{IN} ≤ 20 V, 1.0 mA ≤ I _{OUT} ≤ 40 mA	4.75	—	5.25	V
				1.0 mA ≤ I _{OUT} ≤ 70 mA	4.75	—	5.25	
Quiescent current	I _B	1	T _j = 25°C		—	3.1	6.0	mA
			T _j = 125°C		—	—	5.5	
Quiescent current change	ΔI _B	1	T _j = 25°C	8.0 V ≤ V _{IN} ≤ 20 V	—	—	1.5	mA
				1.0 mA ≤ I _{OUT} ≤ 40 mA	—	—	0.1	
Output noise voltage	V _{NO}	2	T _a = 25°C, 10 Hz ≤ f ≤ 100 kHz		—	40	—	μV _{rms}
Ripple rejection ratio	R.R.	3	f = 120 Hz, 8.0 V ≤ V _{IN} ≤ 18 V, T _j = 25°C		41	49	—	dB
Dropout voltage	V _D	1	T _j = 25°C, I _{OUT} = 150 mA		—	2.0	—	V
Average temperature coefficient of output voltage	T _{CVO}	1	I _{OUT} = 5 mA		—	−0.6	—	mV/°C

TA78L06PF
Electrical Characteristics

($V_{IN} = 11\text{ V}$, $I_{OUT} = 40\text{ mA}$, $C_{IN} = 0.33\text{ }\mu\text{F}$, $C_{OUT} = 0.1\text{ }\mu\text{F}$, $0^\circ\text{C} \leq T_j \leq 125^\circ\text{C}$, unless otherwise specified)

Characteristics	Symbol	Test Circuit	Test Condition		Min	Typ.	Max	Unit
Output voltage	V _{OUT}	1	T _j = 25°C		5.76	6.0	6.24	V
Line regulation	Reg-line	1	T _j = 25°C	8.1 V ≤ V _{IN} ≤ 21 V	—	50	150	mV
				9.0 V ≤ V _{IN} ≤ 21 V	—	45	110	
Load regulation	Reg-load	1	T _j = 25°C	1.0 mA ≤ I _{OUT} ≤ 100 mA	—	12	70	mV
				1.0 mA ≤ I _{OUT} ≤ 40 mA	—	5.5	35	
Output voltage	V _{OUT}	1	T _j = 25°C	8.1 V ≤ V _{IN} ≤ 21 V, 1.0 mA ≤ I _{OUT} ≤ 40 mA	5.7	—	6.3	V
				1.0 mA ≤ I _{OUT} ≤ 70 mA	5.7	—	6.3	
Quiescent current	I _B	1	T _j = 25°C	—	3.1	6.0	mA	
			T _j = 125°C	—	—	5.5		
Quiescent current change	ΔI _B	1	T _j = 25°C	9.0 V ≤ V _{IN} ≤ 20 V	—	—	1.5	mA
				1.0 mA ≤ I _{OUT} ≤ 40 mA	—	—	0.1	
Output noise voltage	V _{NO}	2	T _a = 25°C, 10 Hz ≤ f ≤ 100 kHz		—	40	—	μV _{rms}
Ripple rejection ratio	R.R.	3	f = 120 Hz, 9.0 V ≤ V _{IN} ≤ 19 V, T _j = 25°C		39	47	—	dB
Dropout voltage	V _D	1	T _j = 25°C, I _{OUT} = 150 mA		—	2.0	—	V
Average temperature coefficient of output voltage	T _{CVO}	1	I _{OUT} = 5 mA		—	−0.7	—	mV/°C

TA78L07PF
Electrical Characteristics

($V_{IN} = 12\text{ V}$, $I_{OUT} = 40\text{ mA}$, $C_{IN} = 0.33\text{ }\mu\text{F}$, $C_{OUT} = 0.1\text{ }\mu\text{F}$, $0^\circ\text{C} \leq T_j \leq 125^\circ\text{C}$, unless otherwise specified)

Characteristics	Symbol	Test Circuit	Test Condition		Min	Typ.	Max	Unit
Output voltage	V _{OUT}	1	T _j = 25°C		6.72	7.0	7.28	V
Line regulation	Reg.line	1	T _j = 25°C	9.2 V ≤ V _{IN} ≤ 22 V	—	50	160	mV
				10 V ≤ V _{IN} ≤ 22 V	—	45	115	
Load regulation	Reg.load	1	T _j = 25°C	1.0 mA ≤ I _{OUT} ≤ 100 mA	—	13	75	mV
				1.0 mA ≤ I _{OUT} ≤ 40 mA	—	6.0	40	
Output voltage	V _{OUT}	1	T _j = 25°C	9.2 V ≤ V _{IN} ≤ 22 V, 1.0 mA ≤ I _{OUT} ≤ 40 mA	6.65	—	7.35	V
				1.0 mA ≤ I _{OUT} ≤ 70 mA	6.65	—	7.35	
Quiescent current	I _B	1	T _j = 25°C		—	3.1	6.5	mA
			T _j = 125°C		—	—	6.0	
Quiescent current change	ΔI _B	1	T _j = 25°C	10 V ≤ V _{IN} ≤ 22 V	—	—	1.5	mA
				1.0 mA ≤ I _{OUT} ≤ 40 mA	—	—	0.1	
Output noise voltage	V _{NO}	2	T _a = 25°C, 10 Hz ≤ f ≤ 100 kHz		—	50	—	μV _{rms}
Ripple rejection ratio	R.R.	3	f = 120 Hz, 10 V ≤ V _{IN} ≤ 20 V, T _j = 25°C		37	46	—	dB
Dropout voltage	V _D	1	T _j = 25°C, I _{OUT} = 150 mA		—	2.0	—	V
Average temperature coefficient of output voltage	T _{CVO}	1	I _{OUT} = 5 mA		—	−0.75	—	mV/°C

TA78L08PF
Electrical Characteristics

($V_{IN} = 14\text{ V}$, $I_{OUT} = 40\text{ mA}$, $C_{IN} = 0.33\text{ }\mu\text{F}$, $C_{OUT} = 0.1\text{ }\mu\text{F}$, $0^\circ\text{C} \leq T_j \leq 125^\circ\text{C}$, unless otherwise specified)

Characteristics	Symbol	Test Circuit	Test Condition		Min	Typ.	Max	Unit
Output voltage	V _{OUT}	1	T _j = 25°C		7.7	8.0	8.3	V
Line regulation	Reg.line	1	T _j = 25°C	10.5 V ≤ V _{IN} ≤ 23 V	—	20	175	mV
				11 V ≤ V _{IN} ≤ 23 V	—	12	125	
Load regulation	Reg.load	1	T _j = 25°C	1.0 mA ≤ I _{OUT} ≤ 100 mA	—	15	80	mV
				1.0 mA ≤ I _{OUT} ≤ 40 mA	—	7.0	40	
Output voltage	V _{OUT}	1	T _j = 25°C	10.5 V ≤ V _{IN} ≤ 23 V, 1.0 mA ≤ I _{OUT} ≤ 40 mA	7.6	—	8.4	V
				1.0 mA ≤ I _{OUT} ≤ 70 mA	7.6	—	8.4	
Quiescent current	I _B	1	T _j = 25°C		—	3.1	6.5	mA
			T _j = 125°C		—	—	6.0	
Quiescent current change	ΔI _B	1	T _j = 25°C	11 V ≤ V _{IN} ≤ 23 V	—	—	1.5	mA
				1.0 mA ≤ I _{OUT} ≤ 40 mA	—	—	0.1	
Output noise voltage	V _{NO}	2	T _a = 25°C, 10 Hz ≤ f ≤ 100 kHz		—	60	—	μV _{rms}
Ripple rejection ratio	R.R.	3	f = 120 Hz, 12 V ≤ V _{IN} ≤ 23 V, T _j = 25°C		37	45	—	dB
Dropout voltage	V _D	1	T _j = 25°C, I _{OUT} = 150 mA		—	2.0	—	V
Average temperature coefficient of output voltage	T _{CVO}	1	I _{OUT} = 5 mA		—	−0.8	—	mV/°C

TA78L09PF
Electrical Characteristics

($V_{IN} = 15\text{ V}$, $I_{OUT} = 40\text{ mA}$, $C_{IN} = 0.33\text{ }\mu\text{F}$, $C_{OUT} = 0.1\text{ }\mu\text{F}$, $0^{\circ}\text{C} \leq T_j \leq 125^{\circ}\text{C}$, unless otherwise specified)

Characteristics	Symbol	Test Circuit	Test Condition		Min	Typ.	Max	Unit
Output voltage	V _{OUT}	1	T _j = 25°C		8.64	9.0	9.36	V
Line regulation	Reg-line	1	T _j = 25°C	11.4 V ≤ V _{IN} ≤ 24 V	—	80	200	mV
				12 V ≤ V _{IN} ≤ 24 V	—	20	160	
Load regulation	Reg-load	1	T _j = 25°C	1.0 mA ≤ I _{OUT} ≤ 100 mA	—	17	90	mV
				1.0 mA ≤ I _{OUT} ≤ 40 mA	—	8.0	45	
Output voltage	V _{OUT}	1	T _j = 25°C	11.4 V ≤ V _{IN} ≤ 24 V, 1.0 mA ≤ I _{OUT} ≤ 40 mA	8.55	—	9.45	V
				1.0 mA ≤ I _{OUT} ≤ 70 mA	8.55	—	9.45	
Quiescent current	I _B	1	T _j = 25°C		—	3.2	6.5	mA
			T _j = 125°C		—	—	6.0	
Quiescent current change	ΔI _B	1	T _j = 25°C	12 V ≤ V _{IN} ≤ 24 V	—	—	1.5	mA
				1.0 mA ≤ I _{OUT} ≤ 40 mA	—	—	0.1	
Output noise voltage	V _{NO}	2	T _a = 25°C, 10 Hz ≤ f ≤ 100 kHz		—	65	—	μV _{rms}
Ripple rejection ratio	R.R.	3	f = 120 Hz, 12 V ≤ V _{IN} ≤ 24 V, T _j = 25°C		36	44	—	dB
Dropout voltage	V _D	1	T _j = 25°C, I _{OUT} = 150 mA		—	2.0	—	V
Average temperature coefficient of output voltage	T _{CVO}	1	I _{OUT} = 5 mA		—	−0.85	—	mV/°C

TA78L10PF
Electrical Characteristics

($V_{IN}=16\text{ V}$, $I_{OUT}=40\text{ mA}$, $C_{IN} = 0.33\text{ }\mu\text{F}$, $C_{OUT} = 0.1\text{ }\mu\text{F}$, $0^{\circ}\text{C} \leq T_j \leq 125^{\circ}\text{C}$, unless otherwise specified)

Characteristics	Symbol	Test Circuit	Test Condition		Min	Typ.	Max	Unit
Output voltage	V _{OUT}	1	T _j = 25°C		9.6	10	10.4	V
Line regulation	Reg-line	1	T _j = 25°C	12.5 V ≤ V _{IN} ≤ 25 V	—	80	230	mV
				13 V ≤ V _{IN} ≤ 25 V	—	30	170	
Load regulation	Reg-load	1	T _j = 25°C	1.0 mA ≤ I _{OUT} ≤ 100 mA	—	18	90	mV
				1.0 mA ≤ I _{OUT} ≤ 40 mA	—	8.5	45	
Output voltage	V _{OUT}	1	T _j = 25°C	12.5 V ≤ V _{IN} ≤ 25 V, 1.0 mA ≤ I _{OUT} ≤ 40 mA	9.5	—	10.5	V
				1.0 mA ≤ I _{OUT} ≤ 70 mA	9.5	—	10.5	
Quiescent current	I _B	1	T _j = 25°C		—	3.2	6.5	mA
			T _j = 125°C		—	—	6.0	
Quiescent current change	ΔI _B	1	T _j = 25°C	13 V ≤ V _{IN} ≤ 25 V	—	—	1.5	mA
				1.0 mA ≤ I _{OUT} ≤ 40 mA	—	—	0.1	
Output noise voltage	V _{NO}	2	T _a = 25°C, 10 Hz ≤ f ≤ 100 kHz		—	70	—	μV _{rms}
Ripple rejection ratio	R.R.	3	f = 120 Hz, 13 V ≤ V _{IN} ≤ 24 V, T _j = 25°C		36	43	—	dB
Dropout voltage	V _D	1	T _j = 25°C, I _{OUT} = 150 mA		—	2.0	—	V
Average temperature coefficient of output voltage	T _{CVO}	1	I _{OUT} = 5 mA		—	−0.9	—	mV/°C

TA78L12PF
Electrical Characteristics

($V_{IN} = 19\text{ V}$, $I_{OUT} = 40\text{ mA}$, $C_{IN} = 0.33\text{ }\mu\text{F}$, $C_{OUT} = 0.1\text{ }\mu\text{F}$, $0^\circ\text{C} \leq T_j \leq 125^\circ\text{C}$, unless otherwise specified)

Characteristics	Symbol	Test Circuit	Test Condition		Min	Typ.	Max	Unit
Output voltage	V _{OUT}	1	T _j = 25°C		11.52	12	12.48	V
Line regulation	Reg-line	1	T _j = 25°C	14.5 V ≤ V _{IN} ≤ 27 V	—	120	250	mV
				16 V ≤ V _{IN} ≤ 27 V	—	100	200	
Load regulation	Reg-load	1	T _j = 25°C	1.0 mA ≤ I _{OUT} ≤ 100 mA	—	20	100	mV
				1.0 mA ≤ I _{OUT} ≤ 40 mA	—	10	50	
Output voltage	V _{OUT}	1	T _j = 25°C	14.5 V ≤ V _{IN} ≤ 27 V, 1.0 mA ≤ I _{OUT} ≤ 40 mA	11.4	—	12.6	V
				1.0 mA ≤ I _{OUT} ≤ 70 mA	11.4	—	12.6	
Quiescent current	I _B	1	T _j = 25°C		—	3.2	6.5	mA
			T _j = 125°C		—	—	6.0	
Quiescent current change	ΔI _B	1	T _j = 25°C	16 V ≤ V _{IN} ≤ 27 V	—	—	1.5	mA
				1.0 mA ≤ I _{OUT} ≤ 40 mA	—	—	0.1	
Output noise voltage	V _{NO}	2	T _a = 25°C, 10 Hz ≤ f ≤ 100 kHz		—	80	—	μV _{rms}
Ripple rejection ratio	R.R.	3	f = 120 Hz, 15 V ≤ V _{IN} ≤ 25 V, T _j = 25°C		36	41	—	dB
Dropout voltage	V _D	1	T _j = 25°C, I _{OUT} = 150 mA		—	2.0	—	V
Average temperature coefficient of output voltage	T _{CVO}	1	I _{OUT} = 5 mA		—	−1.0	—	mV/°C

TA78L15PF
Electrical Characteristics


($V_{IN} = 23\text{ V}$, $I_{OUT} = 40\text{ mA}$, $C_{IN} = 0.33\text{ }\mu\text{F}$, $C_{OUT} = 0.1\text{ }\mu\text{F}$, $0^\circ\text{C} \leq T_j \leq 125^\circ\text{C}$, unless otherwise specified)

Characteristics	Symbol	Test Circuit	Test Condition		Min	Typ.	Max	Unit
Output voltage	V _{OUT}	1	T _j = 25°C		14.4	15	15.6	V
Line regulation	Reg-line	1	T _j = 25°C	17.5 V ≤ V _{IN} ≤ 30 V	—	130	300	mV
				20 V ≤ V _{IN} ≤ 30 V	—	110	250	
Load regulation	Reg-load	1	T _j = 25°C	1.0 mA ≤ I _{OUT} ≤ 100 mA	—	25	150	mV
				1.0 mA ≤ I _{OUT} ≤ 40 mA	—	12	75	
Output voltage	V _{OUT}	1	T _j = 25°C	17.5 V ≤ V _{IN} ≤ 30 V, 1.0 mA ≤ I _{OUT} ≤ 40 mA	14.25	—	15.75	V
				1.0 mA ≤ I _{OUT} ≤ 70 mA	14.25	—	15.75	
Quiescent current	I _B	1	T _j = 25°C		—	3.3	6.5	mA
			T _j = 125°C		—	—	6.0	
Quiescent current change	ΔI _B	1	T _j = 25°C	20 V ≤ V _{IN} ≤ 30 V	—	—	1.5	mA
				1.0 mA ≤ I _{OUT} ≤ 40 mA	—	—	0.1	
Output noise voltage	V _{NO}	2	T _a = 25°C, 10 Hz ≤ f ≤ 100 kHz		—	90	—	μV _{rms}
Ripple rejection ratio	R.R.	3	f = 120 Hz, 18.5 V ≤ V _{IN} ≤ 28.5 V, T _j = 25°C		34	40	—	dB
Dropout voltage	V _D	1	T _j = 25°C, I _{OUT} = 150 mA		—	2.0	—	V
Average temperature coefficient of output voltage	T _{CV} O	1	I _{OUT} = 5 mA		—	-1.3	—	mV/°C

Electrical Characteristics for All Products


Generally, the characteristics of power supply ICs change according to temperature fluctuations. The specification $T_j = 25^\circ\text{C}$ is based on a state where temperature increase has no effect (assuming no fluctuation in the characteristics) as ascertained by pulse tests.

Test Circuit 1/Standard Application

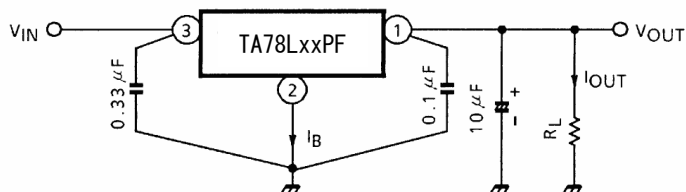








Use capacitors to connect the input terminal and GND and the output terminal and GND. The capacitances should be determined experimentally. In particular, adequate investigation should be made to ensure there is no problem even in high or low temperatures.




Test Circuit 2

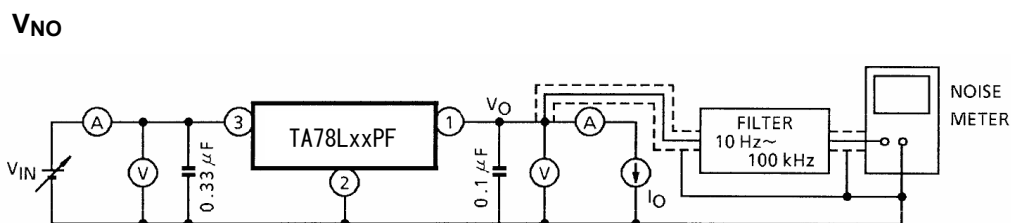

Test Circuit 3

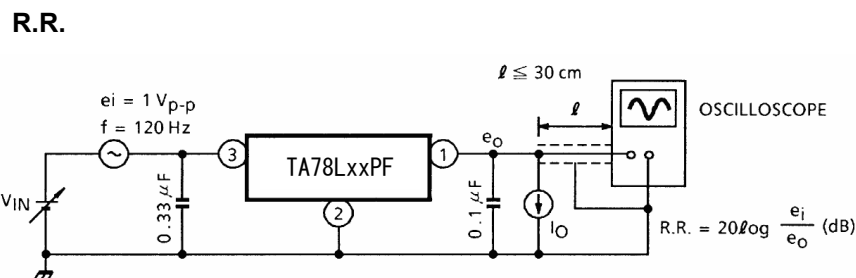


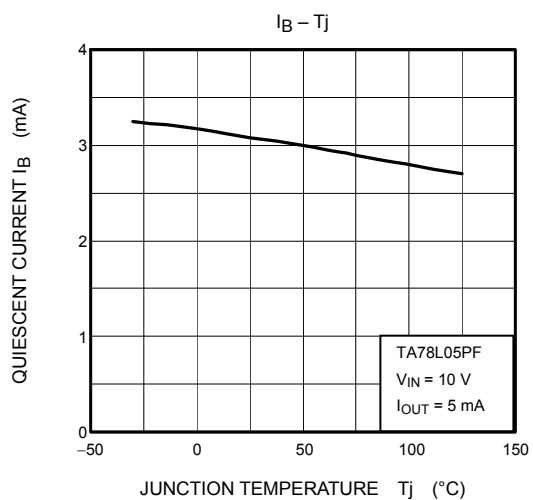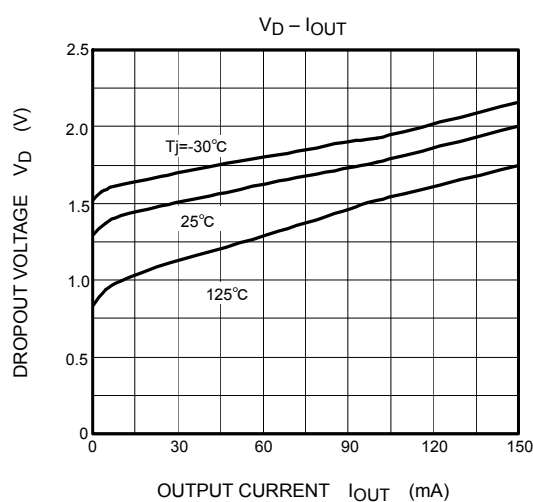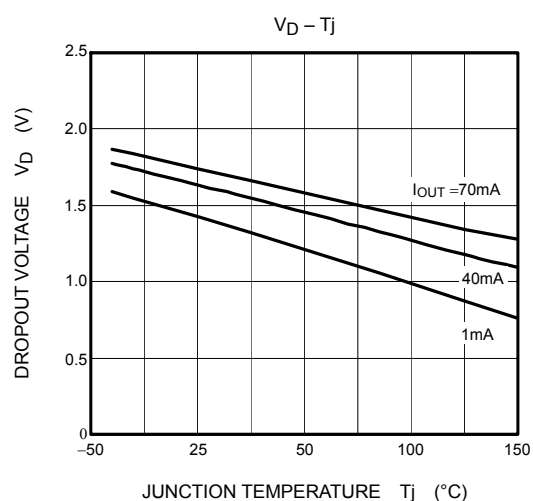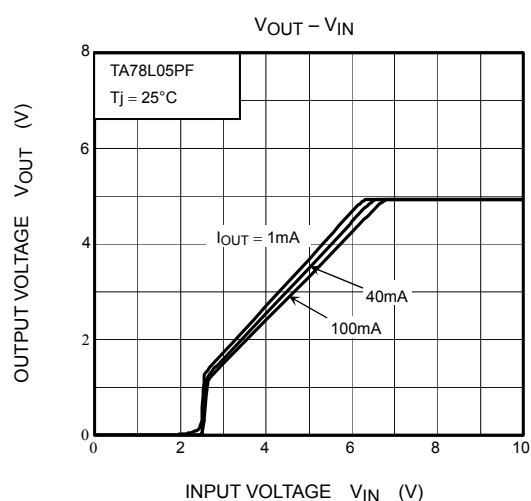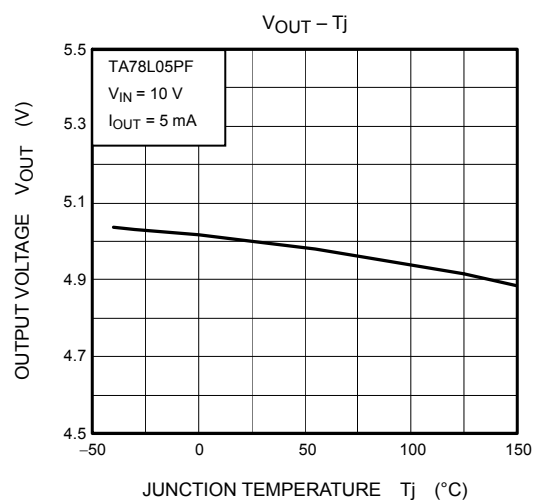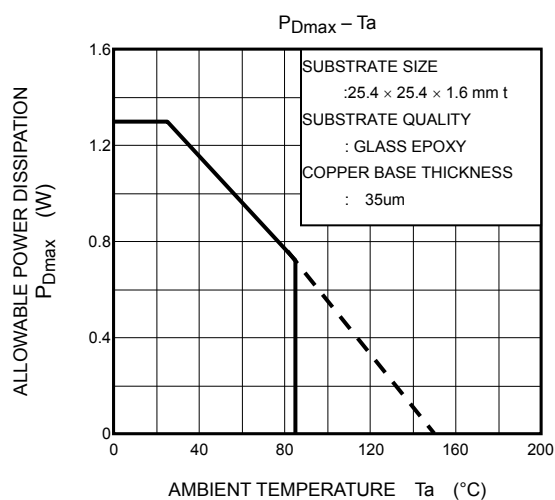

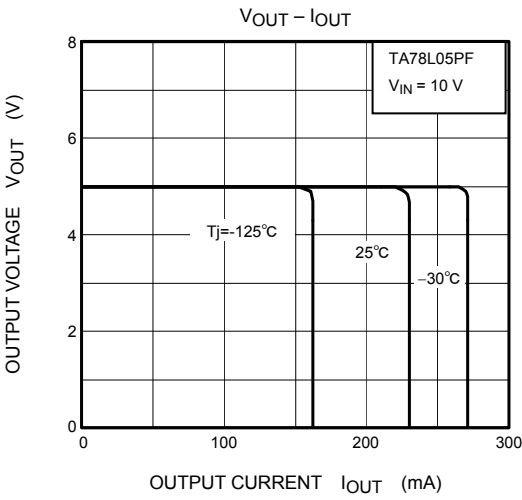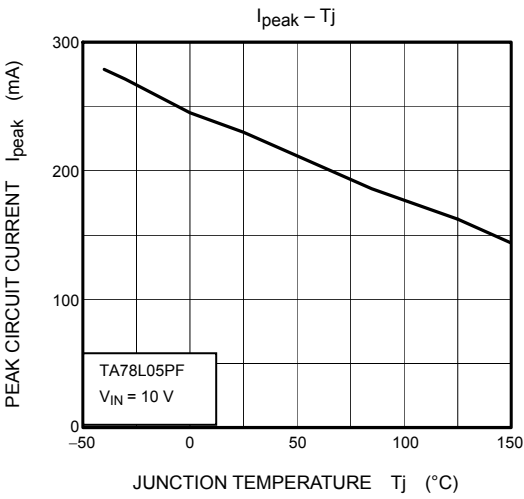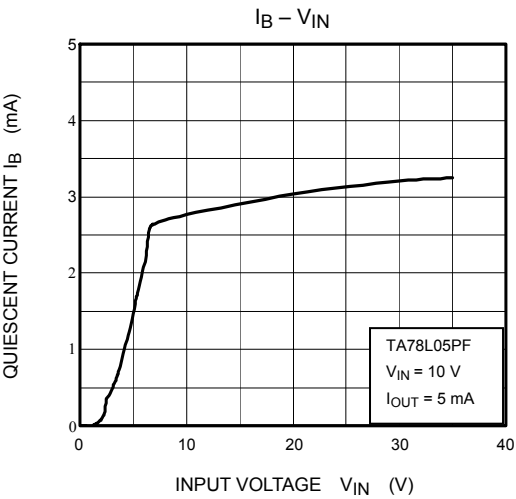

Precautions for Use

If a high voltage in excess of the output voltage (typ. value) of the IC is applied to the output terminal of the IC, the IC may be destroyed. To prevent such application of excessive voltage, connect a Zener diode between the output terminal and GND.

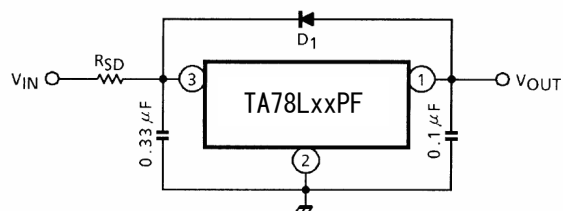

D₁ : IC protective diode

When surge voltage is applied to IC output terminal or $V_{IN} < V_{OUT}$ at the time of power ON/OFF, always connect the high speed swithing diode D₁.


R_{SD} : Power limiting resistor

If V_{IN} is too high, always connect R_{SD} in order to reduce power consumption of IC.

Package Dimensions

SON8-P-0303-0.65 (PS-8)

Unit: mm

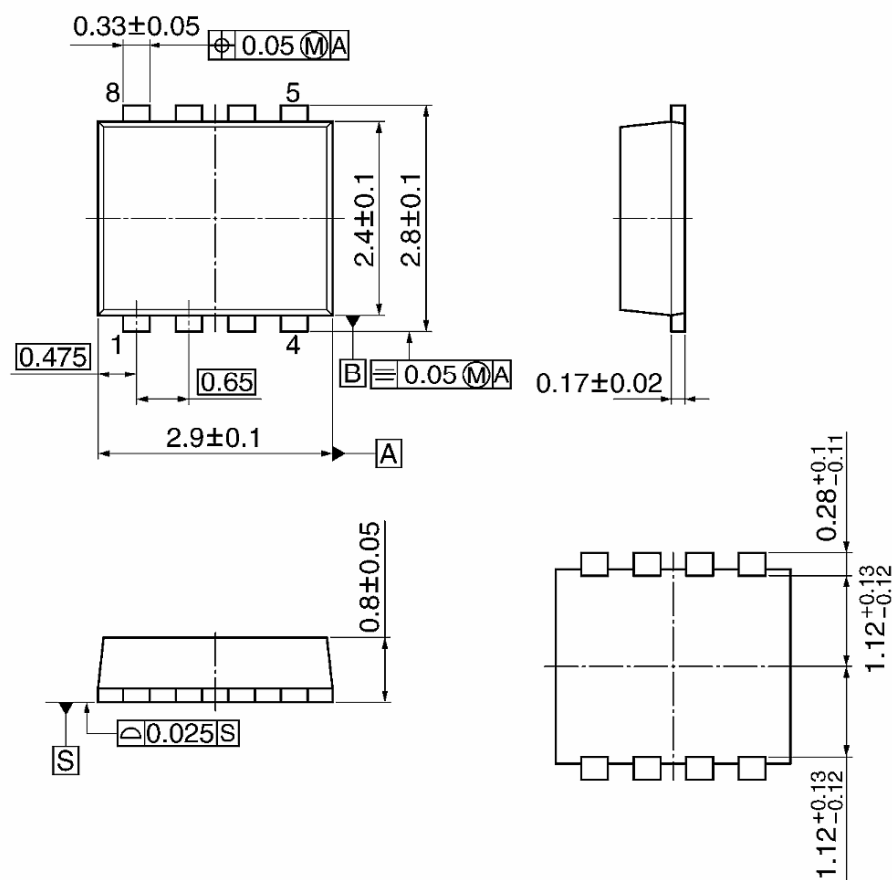

Weight: 0.08 g (typ.)

RESTRICTIONS ON PRODUCT USE

20070701-EN

- The information contained herein is subject to change without notice.
- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property.
In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc.
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- The products described in this document shall not be used or embedded to any downstream products of which manufacture, use and/or sale are prohibited under any applicable laws and regulations.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA for any infringements of patents or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patents or other rights of TOSHIBA or the third parties.
- Please contact your sales representative for product-by-product details in this document regarding RoHS compatibility. Please use these products in this document in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances. Toshiba assumes no liability for damage or losses occurring as a result of noncompliance with applicable laws and regulations.