

LM119/219/319

Dual Voltage Comparator

Product Specification

DESCRIPTION

The LM119 series are precision high-speed dual comparators fabricated on a single monolithic chip. They are designed to operate over a wide range of supply voltages down to a single 5V logic supply and ground. Further, they have higher gain and lower input currents than devices like the μ A710. The uncommitted collector of the output stage makes the LM119 compatible with RTL, DTL, and TTL as well as capable of driving lamps and relays at currents up to 25mA.

Although designed primarily for applications requiring operation from digital logic supplies, the LM119 series are fully specified for power supplies up to $\pm 15V$. It features faster response than the LM111 at the expense of higher power dissipation. However, the high-speed, wide operating voltage range and low


package count make the LM119 much more versatile than older devices like the μ A711.

The LM119 is specified from $-55^{\circ}C$ to $+125^{\circ}C$, the LM219 is specified from $-25^{\circ}C$ to $+85^{\circ}C$, and the LM319 is specified from $0^{\circ}C$ to $+70^{\circ}C$.


FEATURES

- Two independent comparators
- Operates from a single 5V supply
- Typically 80ns response time at $\pm 15V$
- Minimum fanout of 3 (each side)
- Maximum input current of $1\mu A$ over temperature
- Inputs and outputs can be isolated from system ground
- High common-mode slew rate
- MIL-STD-883A, B, C available

PIN CONFIGURATION

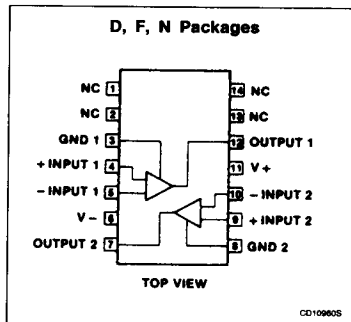

EQUIVALENT SCHEMATIC

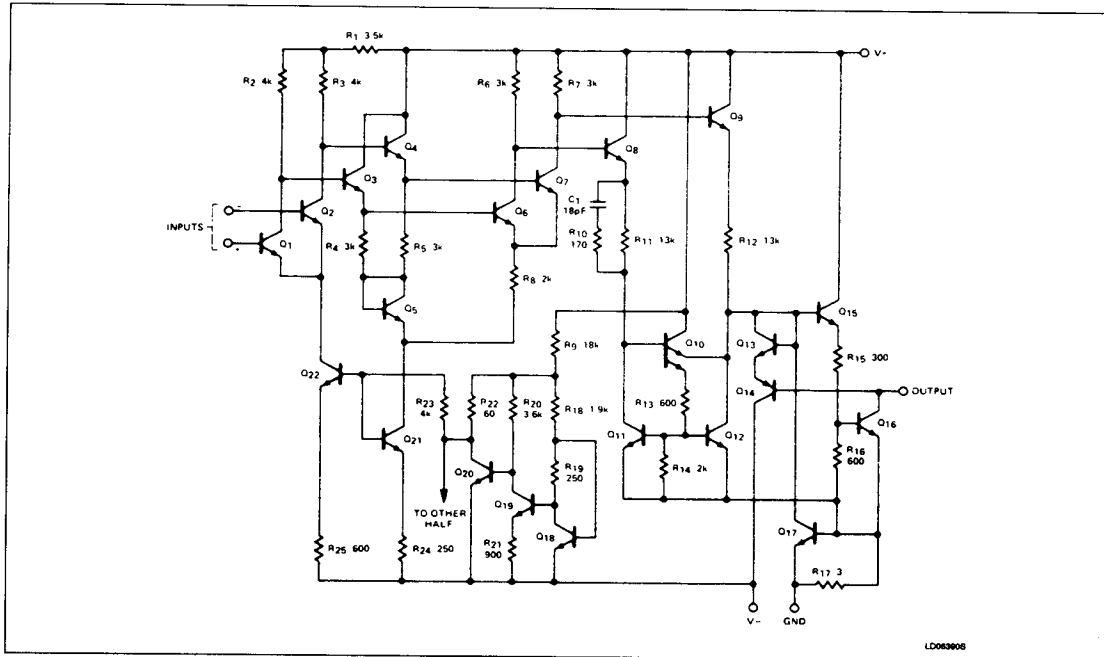

Dual Voltage Comparator

LM119/219/319

ORDERING INFORMATION

DESCRIPTION	TEMPERATURE RANGE	ORDER CODE
14-Pin Cerdip	-55°C to +125°C	LM119F
14-Pin Cerdip	-25°C to +85°C	LM219F
14-Pin Plastic SO	0 to +70°C	LM319D
14-Pin Cerdip	0 to +70°C	LM319F
14-Pin Plastic DIP	0 to +70°C	LM319N

ABSOLUTE MAXIMUM RATINGS

SYMBOL	PARAMETER	RATING	UNIT
V_S	Total supply voltage	36	V
	Output to negative supply voltage	36	V
	Ground to negative supply voltage	25	V
	Ground to positive supply voltage	18	V
	Differential input voltage	± 5	V
V_{IN}	Input voltage ¹	± 15	V
	Maximum power dissipation, $T_A = 25^\circ\text{C}$ (still-air) ²		
	F package	1190	mW
	N package	1420	mW
	D package	1040	mW
	Output short-circuit duration	10	s
T_A	Operating temperature range		$^\circ\text{C}$
	LM119	-55 to +125	$^\circ\text{C}$
	LM219	-25 to +85	$^\circ\text{C}$
	LM319	0 to +70	$^\circ\text{C}$
T_{STG}	Storage temperature range	-65 to +150	$^\circ\text{C}$
T_{SOLD}	Lead soldering temperature (10sec max)	300	$^\circ\text{C}$

NOTES:

- For supply voltages less than $\pm 15\text{V}$, the absolute maximum rating is equal to the supply voltage.
- Derate above 25°C , at the following rates:
 F package at $9.5\text{mW}/^\circ\text{C}$
 N package at $11.4\text{mW}/^\circ\text{C}$
 D package at $8.3\text{mW}/^\circ\text{C}$

Dual Voltage Comparator

LM119/219/319

DC ELECTRICAL CHARACTERISTICS $V_S = \pm 15V$, for LM119, $-55^\circ C \leq T_A \leq 125^\circ C$
 LM219, $-25^\circ C \leq T_A \leq 85^\circ C$
 LM319, $0^\circ C \leq T_A \leq 70^\circ C$ } unless otherwise specified.

SYMBOL	PARAMETER	TEST CONDITIONS	LM119/219			LM319			UNIT
			Min	Typ	Max	Min	Typ	Max	
V_{OS}	Input offset voltage ^{1, 2}	$R_S \leq 5k\Omega$, $T_A = 25^\circ C$ Over temp.		0.7	4.0 7		2.0	8.0 10	mV mV
I_{OS}	Input offset current ^{1, 2}	$T_A = 25^\circ C$ Over temp.		30	75 100		80	200 300	nA nA
I_B	Input bias current ¹	$T_A = 25^\circ C$ Over temp.		150	500 1000		250	1000 1200	nA nA
A_V	Voltage gain	$T_A = 25^\circ C$	10	40		8	40		V/mV
V_{OL}	Saturation voltage	$V_{IN} \leq -5mV$, $I_{OUT} = 25mA$, $T_A = 25^\circ C$		0.75	1.5				V
		$V_{IN} \leq -10mV$, $I_{OUT} = 25mA$, $T_A = 25^\circ C$					0.75	1.5	V
		$V_+ \geq 4.5V$, $V_- = 0$ $V_{IN} \leq -6mV$, $I_{OUT} = 3.2mA$ $T_A \geq 0^\circ C$		0.23	0.4 0.6				V
		$T_A \leq 0^\circ C$ $V_{IN} \leq -10mV$, $I_{OUT} = 3.2mA$					0.3	0.4	V
I_{OH}	Output leakage current	$V_- = 0V$, $V_{IN} \geq 5mV$ $V_{OUT} = 35V$, $T_A = 25^\circ C$ Over temp.		0.2 1	2 10				μA μA
		$V_- = 0V$, $V_{IN} \geq 10mV$ $V_{OUT} = 35V$, $T_A = 25^\circ C$					0.2	10	μA
V_{IN}	Input voltage range	$V_S = \pm 15V$ $V_+ = 5V$, $V_- = 0V$	1	± 13	3	1	± 13	3	V V
V_{ID}	Differential input voltage				± 5			± 5	V
I_+	Positive supply current	$V_+ = 5V$, $V_- = 0V$, $T_A = 25^\circ C$		4.3			4.3		mA
I_+	Positive supply current	$V_S = \pm 15V$, $T_A = 25^\circ C$		8.0	11.5		8.0	12.5	mA
I_-	Negative supply current	$V_S = \pm 15V$, $T_A = 25^\circ C$		3.0	4.5		3.0	5.0	mA

NOTES:

- V_{OS} , I_{OS} and I_B specifications apply for a supply voltage range of $V_S = \pm 15V$ down to a single 5V supply.
- The offset voltages and offset currents given are the maximum values required to drive the output to within 1V of either supply with a 1mA load. Thus these parameters define an error band and take into account the worst case effects of voltage gain and input impedance.

AC ELECTRICAL CHARACTERISTICS


SYMBOL	PARAMETER	TEST CONDITIONS	LIMITS			UNIT
			Min	Typ	Max	
t_R	Response time ¹	$V_S = \pm 15V$, $T_A = 25^\circ C$ $R_L = 500\Omega$ (see test figure)		80		ns

NOTE:







- The response time specified is for a 100mV step with 5mV overdrive.

Dual Voltage Comparator

TEST CIRCUIT

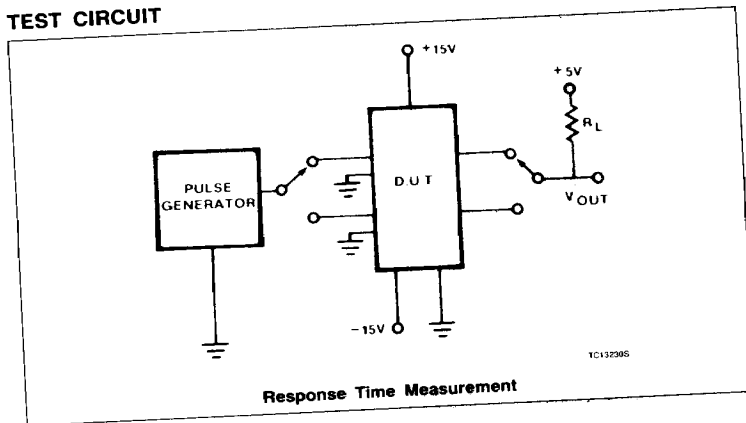

TYPICAL PERFORMANCE CHARACTERISTICS

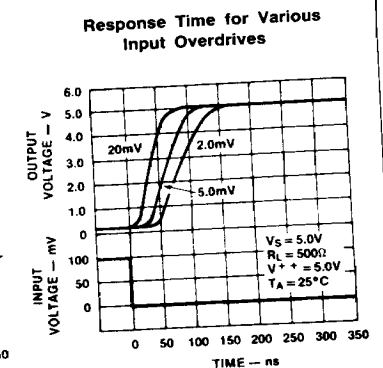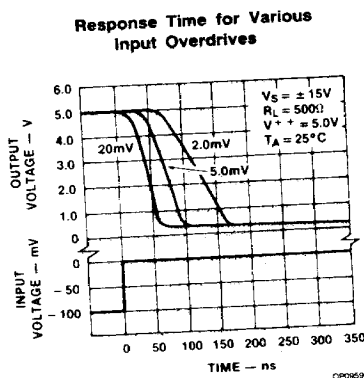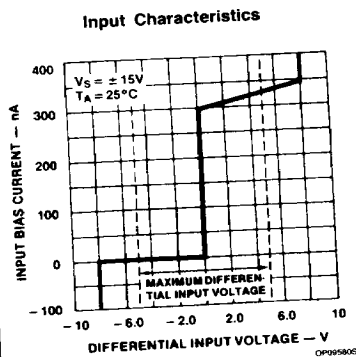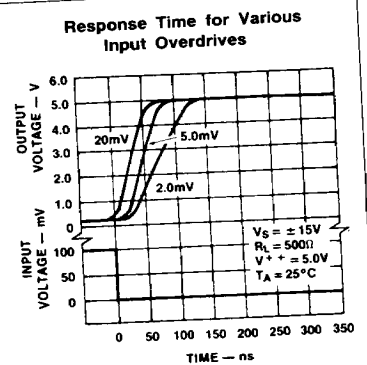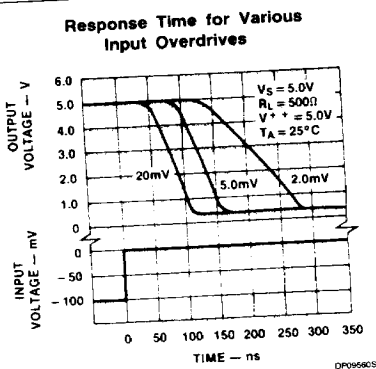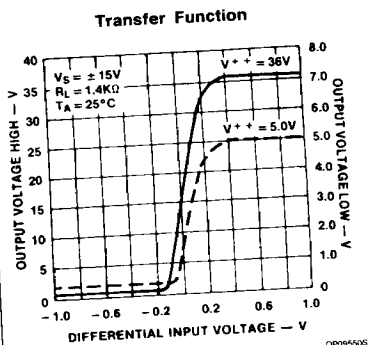


Dual Voltage Comparator

LM119/219/319


TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

Output Saturation Voltage




OP096105

Supply Current




OP096205


Output Limiting Characteristics

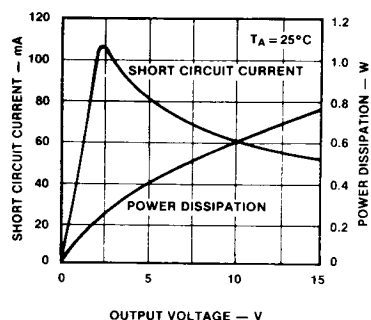


OP096305

Input Currents
(LM119/219)


OP096455

Common-Mode Limits
(LM119/219)


OP096505

Supply Current
(LM119/219)


OP096605

Input Currents
(LM319)

OP096705

Supply Currents
(LM319)

OP096815


Common-Mode Limits
(LM319)

OP096905

Dual Voltage Comparator


LM119/219/319

TYPICAL APPLICATIONS



TC132415

Relay Driver




TC132505

Window Detector

NOTES:

$V_{OUT} = 5V$ for $V_{LT} < V_{IN} < V_{UT}$
 $V_{OUT} = 0V$ for $V_{IN} < V_{LT}$ or $V_{IN} > V_{UT}$

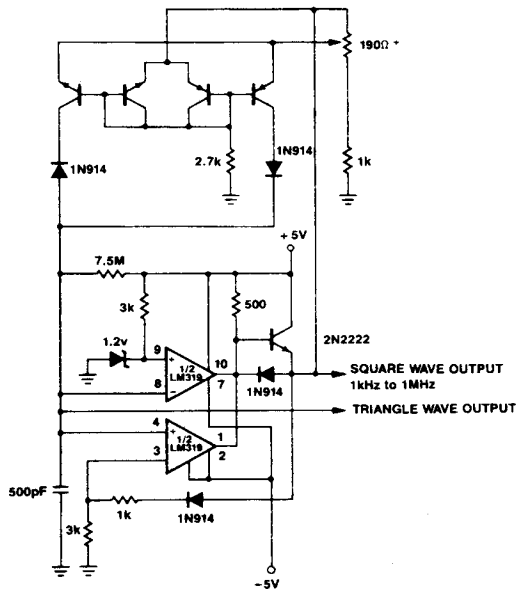

TC132615

NOTE:

Frequency adjust must be buffered for $R_L \leq 10\Omega$

Wide Range Variable Oscillator