


PRESSURE SENSOR

0 to 200 kPa (0 to 29.0 psi)

Features

- **Absolute pressure sensor**
- **High reliability and low drift over lifetime**
- **High media compatibility**
- **Backside media access**
- **Wide temperature operating range**
- **Robust miniature surface mount package**
- **Electrical connection on one side of package**
- **Tube connection option**

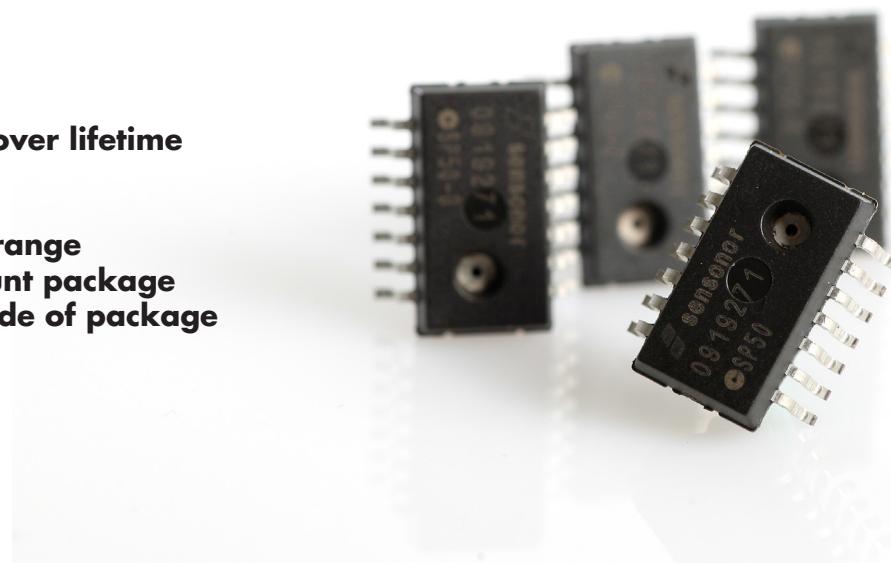

Description

The SP50-2 uncompensated piezoresistive pressure sensor is designed for affordable and reliable pressure measurements in a broad range of industrial applications and designs. The design consists of a bulk micromachined pressure sensor die mounted in a surface mount package.

SP50-2 has excellent media compatibility due to the patented triple stack sensor design with buried backside piezoresistive elements. With the backside media access, the piezo resistors will not come in direct contact with the measurement media. The design improves stability and sensor lifetime compared to many traditional sensor designs.

The design and performance of SP50-2 makes it ideal for high accuracy measurements, also in harsh environments. The long term stability is outstanding and has been proven in applications during a period of more than 10 years.

SP50-2 is packaged in a proven 14 pin, SOIC package that can be handled by automatic production lines.

The sensor can be connected to passive compensation and/or signal conditioning as required for a given application.





The SP50-2T version has a tube connection to ease pressure connection.

SP50-2
SP50-2T


GENERAL CONDITIONS

Parameter	Min	Typ	Max	Unit	Comments
Operating supply voltage		5.0		V	
Operating temperature	-40		125	°C	
Operating pressure	0		200	kPa	Absolute pressure
Overload pressure	600			kPa	
Breakdown voltage		14		V	At $I=5.0\mu A$
Leakage current		0.2		nA	At $V_{dd}=4.0V$


MECHANICAL DIMENSIONS

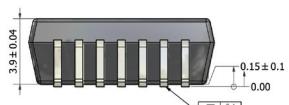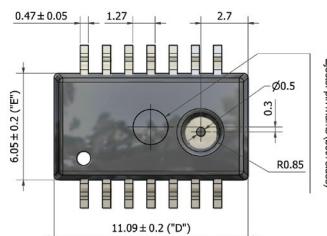

NON-LINEARITY

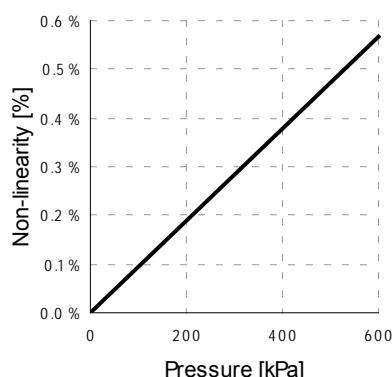


PIN OUT AND LASER MARKING

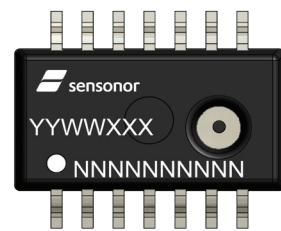

YYWWXXXX : Lot number
NNNNNNNNNN: Product name

1	NC
2	NC
3	PP
4	PN
5	VDD
6	NEPI
7	VSS
8	VSS
9	NC
10	NC
11	NC
12	NC
13	NC
14	NC

TUBE CONNECTION OPTION



ORDERING INFORMATION

Description

Model

Delivered on blister tape

SP50-2

With tube connection

SP50-2T

CONTACT INFORMATION

Sensonor Technologies AS

Phone: +47 3303 5000 - Fax: +47 3303 5005

sales@sensonor.no www.sensonor.com

Information furnished by Senonor Technologies is believed to be accurate and reliable. However, no responsibility is assumed by Senonor Technologies for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Senonor Technologies reserves the right to make changes without further notice to any products herein. Senonor Technologies makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Senonor Technologies assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. No license is granted by implication or otherwise under any patent or patent rights of Senonor Technologies. Trademarks and registered trademarks are the property of their respective owners. Senonor Technologies products are not intended for any application in which the failure of the Senonor Technologies product could create a situation where personal injury or death may occur. Should Buyer purchase or use Senonor Technologies products for any such unintended or unauthorized application, Buyer shall indemnify and hold Senonor Technologies and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable legal fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Senonor Technologies was negligent regarding the design or manufacture of the part.