



FE-XAL-AL 630VDC Audio Capacitors Polyester Film, Aluminium Foil

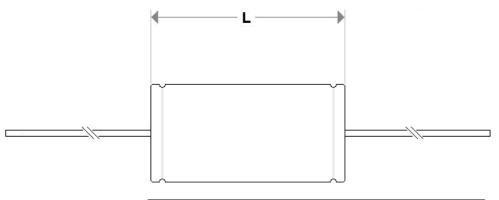



CAPACITANCE μF	D	L
0.01 - 0.05	15mm	34mm
0.05+ - 0.47	25mm	54mm
0.47+ -0.8	35mm	54mm
0.8+ - 5.0	45mm	95mm
5.0+ - 10.0	65mm	95mm

AMPOHM Audio Capacitors are specially designed for high performance audio systems, used in various applications. These polyester film capacitors are hand wound using high purity aluminium foil and have their 1.0mm diameter tinned copper leads hand solder sealed to the eyelets in the end discs. They are hermetically sealed in an aluminium housing with phenolic resin and rubber end discs, all being individually hand tested.

Custom Designs available

 $\begin{array}{lll} \mbox{Type:} & \mbox{FE-XAL-AL} \\ \mbox{Capacitance:} & 0.01 \mu \mbox{F} - 10.0 \mu \mbox{F} \\ \mbox{Dissipation Factor:} & < 0.01 \mbox{@ 1KHz} \\ \mbox{Tolerance:} & +/- 20\% \mbox{ up to } 0.1 \mu \mbox{F} \end{array}$

+/- 10% up to 5.0μF +/- 5% above 5.0μF

Rated Voltage: 630V DC
Temperature Range: -40 to +85C

Outer Foil: Line on label denotes outer foil

Marking: AMPOHM

AIDIO CAPACITOR TYPE VALUE/VOLTAGE SPEC DATE CODE

Line on label denotes outer foil

Witness Innovation... Experience Technology







Registered in England & Wales No: 5654904 VAT Registration: 874 7628 73