


# DLVR Series Low Voltage Digital Pressure Sensors



## Features

- 1 to 60 inH<sub>2</sub>O Pressure Ranges
- 3.3V Supply Voltage Standard / 5V Option
- I<sup>2</sup>C Standard Interface / SPI Interface Option
- Better than 1.0% Accuracy Over Temperature Typical

## Applications

- Medical Breathing
- Environmental Controls
- HVAC
- Industrial Controls
- Portable/Hand-Held Equipment

## General Description

The DLVR Series Mini Digital Output Sensor is based on All Sensors' CoBeam<sup>2</sup>™ Technology. This reduces package stress susceptibility, resulting in improved overall long term stability. The technology also vastly improves position sensitivity compared to single die devices.

The supply voltage options ease integration of the sensors into a wide range of process control and measurement systems, allowing direct connection to serial communications channels. For battery-powered systems, the sensors can enter very low-power modes between readings to minimize load on the power supply.

These calibrated and compensated sensors provide accurate, stable output over a wide temperature range. This series is intended for use with non-corrosive, non-ionic working fluids such as air, dry gases and the like. A protective parylene coating is optionally available for moisture/harsh media protection.

| Standard Pressure Ranges |                            |                        |                        |               | Equivalent Circuit |
|--------------------------|----------------------------|------------------------|------------------------|---------------|--------------------|
| Device                   | Operating Range            | Proof Pressure         | Burst Pressure         | Nominal Span  |                    |
| DLVR-L01D                | ±1 inH <sub>2</sub> O      | 100 inH <sub>2</sub> O | 300 inH <sub>2</sub> O | ±6,553 counts |                    |
| DLVR-L02D                | ±2 inH <sub>2</sub> O      | 100 inH <sub>2</sub> O | 300 inH <sub>2</sub> O | ±6,553 counts |                    |
| DLVR-L05D                | ±5 inH <sub>2</sub> O      | 200 inH <sub>2</sub> O | 300 inH <sub>2</sub> O | ±6,553 counts |                    |
| DLVR-L10D                | ±10 inH <sub>2</sub> O     | 200 inH <sub>2</sub> O | 300 inH <sub>2</sub> O | ±6,553 counts |                    |
| DLVR-L30D                | ±30 inH <sub>2</sub> O     | 200 inH <sub>2</sub> O | 500 inH <sub>2</sub> O | ±6,553 counts |                    |
| DLVR-L60D                | ±60 inH <sub>2</sub> O     | 200 inH <sub>2</sub> O | 800 inH <sub>2</sub> O | ±6,553 counts |                    |
| DLVR-L01G                | 0 to 1 inH <sub>2</sub> O  | 100 inH <sub>2</sub> O | 300 inH <sub>2</sub> O | 13,107 counts |                    |
| DLVR-L02G                | 0 to 2 inH <sub>2</sub> O  | 100 inH <sub>2</sub> O | 300 inH <sub>2</sub> O | 13,107 counts |                    |
| DLVR-L05G                | 0 to 5 inH <sub>2</sub> O  | 200 inH <sub>2</sub> O | 300 inH <sub>2</sub> O | 13,107 counts |                    |
| DLVR-L10G                | 0 to 10 inH <sub>2</sub> O | 200 inH <sub>2</sub> O | 300 inH <sub>2</sub> O | 13,107 counts |                    |
| DLVR-L30G                | 0 to 30 inH <sub>2</sub> O | 200 inH <sub>2</sub> O | 500 inH <sub>2</sub> O | 13,107 counts |                    |
| DLVR-L60G                | 0 to 60 inH <sub>2</sub> O | 200 inH <sub>2</sub> O | 800 inH <sub>2</sub> O | 13,107 counts |                    |

| Pressure Sensor Maximum Ratings       |         | Environmental Specifications     |                                                    |
|---------------------------------------|---------|----------------------------------|----------------------------------------------------|
| Supply Voltage (Vs)                   | 6 Vdc   | Temperature Ranges               |                                                    |
| Common Mode Pressure                  | 10 psig | Compensated:                     | Commercial 0°C to 70°C<br>Industrial -20°C to 85°C |
| Lead Temperature (soldering 2-4 sec.) | 270 °C  | Operating Storage                | -25°C to 85 °C<br>-40°C to 125 °C                  |
|                                       |         | Humidity Limits (non condensing) | 0 to 95% RH                                        |



## Performance Characteristics for DLVR Series - Commercial and Industrial Temperature Range

ALL PARAMETERS ARE MEASURED AT 3.3V  $\pm 5\%$  OR 5.0V  $\pm 5\%$  (DEPENDENT ON SELECTED VOLTAGE OPTION) EXCITATION AND ROOM TEMPERATURE UNLESS OTHERWISE SPECIFIED.  
PRESSURE MEASUREMENTS ARE WITH POSITIVE PRESSURE APPLIED TO PORT B.

| Parameter                                                | Min | Typ         | Max       | Units              | Notes |
|----------------------------------------------------------|-----|-------------|-----------|--------------------|-------|
| <b>Output Span</b>                                       |     |             |           |                    | 1     |
| LxxD                                                     | -   | $\pm 6,553$ | -         | Dec count          |       |
| LxxG                                                     | -   | 13,107      | -         | Dec count          |       |
| <b>Offset Output @ Zero Diff. Pressure</b>               |     |             |           |                    | -     |
| LxxD                                                     | -   | 8,192       | -         | Dec count          |       |
| LxxG                                                     | -   | 1,638       | -         | Dec count          |       |
| <b>Total Error Band</b>                                  |     |             |           |                    | 2     |
| L01x, L02x                                               | -   | $\pm 1.5$   | $\pm 2.0$ | %FSS               |       |
| L05x, L10x, L30x, L60x                                   | -   | $\pm 1.0$   | $\pm 1.5$ | %FSS               |       |
| <b>Span Temperature Shift</b>                            |     |             |           |                    | 3     |
| L01x, L02x                                               | -   | $\pm 0.5$   | -         | %FSS               |       |
| L05x, L10x, L30x, L60x                                   | -   | $\pm 0.2$   | -         | %FSS               |       |
| <b>Offset Temperature Shift</b>                          |     |             |           |                    | 3     |
| L01x, L02x                                               | -   | $\pm 0.5$   | -         | %FSS               |       |
| L05x, L10x, L30x, L60x                                   | -   | $\pm 0.2$   | -         | %FSS               |       |
| <b>Offset Warm-up Shift</b>                              |     |             |           |                    | 4     |
| L01x, L02x                                               | -   | $\pm 0.25$  | -         | %FSS               |       |
| L05x, L10x, L30x, L60x                                   | -   | $\pm 0.15$  | -         | %FSS               |       |
| <b>Offset Position Sensitivity (<math>\pm 1g</math>)</b> |     |             |           |                    | -     |
| L01x, L02x                                               | -   | $\pm 0.10$  | -         | %FSS               |       |
| L05x, L10x, L30x, L60x                                   | -   | $\pm 0.05$  | -         | %FSS               |       |
| <b>Offset Long Term Drift (One Year)</b>                 |     |             |           |                    | -     |
| L01x, L02x                                               | -   | $\pm 0.25$  | -         | %FSS               |       |
| L05x, L10x, L30x, L60x                                   | -   | $\pm 0.15$  | -         | %FSS               |       |
| <b>Linearity, Hysteresis Error</b>                       |     |             |           |                    | 6     |
| LxxD                                                     | -   | $\pm 0.25$  | -         | %FSS               |       |
| LxxG                                                     | -   | $\pm 0.10$  | -         | %FSS               |       |
| <b>Response Delay</b>                                    |     |             |           |                    | 5     |
| Sleep - Wake Pressure                                    | -   | 0.40        | 0.50      | ms                 |       |
| Sleep - Wake All                                         | -   | 1.10        | 1.40      | ms                 |       |
| <b>Update Rate</b>                                       |     |             |           |                    | 5     |
| Fast                                                     | -   | 0.40        | 1.0       | ms                 |       |
| Noise Reduced                                            | -   | 1.30        | 3.1       | ms                 |       |
| Low Power                                                | -   | 6.5         | 9.5       | ms                 |       |
| <b>Digital Resolution</b>                                |     |             |           |                    | -     |
| Output Resolution                                        | -   | 14          | -         | bit                |       |
| No Missing Codes                                         | 12  | 13          | -         | bit                |       |
| <b>Temperature Output</b>                                |     |             |           |                    | 7     |
| Resolution                                               | -   | 11          | -         | bit                |       |
| Overall Accuracy                                         | -   | 2           | -         | $^{\circ}\text{C}$ |       |
| <b>Current Requirement (3.3V Option)</b>                 |     |             |           |                    | 5     |
| Fast                                                     | -   | 3.5         | 4.3       | mA                 |       |
| Noise Reduced                                            | -   | 3.6         | 4.5       | mA                 |       |
| Low Power                                                | -   | 0.72        | 0.90      | mA                 |       |
| Sleep (Idle)                                             | -   | 0.5         | 5.0       | uA                 |       |
| <b>Current Requirement (5.0 Option)</b>                  |     |             |           |                    | 5     |
| Fast                                                     | -   | 5.0         | 6.0       | mA                 |       |
| Noise Reduced                                            | -   | 5.2         | 6.2       | mA                 |       |
| Low Power                                                | -   | 1.1         | 1.3       | mA                 |       |
| Sleep (Idle)                                             | -   | 0.5         | 5.0       | uA                 |       |

See following page for performance characteristics table notes

## Specification Notes

NOTE 1: THE SPAN IS THE ALGEBRAIC DIFFERENCE BETWEEN FULL SCALE DECIMAL COUNTS AND THE OFFSET DECIMAL COUNTS.

Pressure Output Transfer Function:

$$Pressure(inH2O) = \left( \frac{P_{out_{dig}} - OS_{dig}}{2^{14}} \right) \times FSS(inH2O)$$

Where,

$P_{out_{dig}}$  Is the sensor 14 bit digital output.

$OS_{dig}$  Is the specified digital offset (gage = 1,638 and differential = 8,192)

$FSS(inH2O)$  Is the sensor Full Scale Span in inH2O (gage = Full Scale Pressure, differential = 2 x Full Scale Pressure)

NOTE 2: TOTAL ERROR BAND COMPRISES OF OFFSET AND SPAN TEMPERATURE AND CALIBRATION ERRORS, LINEARITY AND PRESSURE HYSTERESIS ERRORS, OFFSET WARM-UP SHIFT, OFFSET POSITION SENSITIVITY AND LONG TERM OFFSET DRIFT ERRORS.

NOTE 3: SHIFT IS RELATIVE TO 25C.

NOTE 4: SHIFT IS WITHIN THE FIRST HOUR OF EXCITATION APPLIED TO THE DEVICE.

NOTE 5: PARAMETER IS CHARACTERIZED AND NOT 100% TESTED.

NOTE 6: MEASURED AT ONE-HALF FULL SCALE RATED PRESSURE USING BESY STARIGHT LINE CURVE FIT.

NOTE 7: TEMPERATURE OUTPUT CONVERSION FUNCTION:

Temperature Output Transfer Function:

$$Temperature(^{\circ}C) = T_{out_{dig}} \times \left( \frac{200}{2^{11} - 1} \right) - 50$$



## I2C / SPI Electrical Parameters for DLVR Series

| Parameter                              | Symbol              | Min  | Typ | Max  | Units    |
|----------------------------------------|---------------------|------|-----|------|----------|
| Input High Level                       | -                   | 80.0 | -   | 100  | % of Vs  |
| Input Low Level                        | -                   | 0    | -   | 20.0 | % of Vs  |
| Output Low Level                       | -                   | -    | -   | 10.0 | % of Vs  |
| I2C Pull-up Resistor                   | -                   | 1000 | -   | -    | $\Omega$ |
| I2C Load Capacitance on SDA, @ 400 kHz | C <sub>SDA</sub>    | -    | -   | 200  | pF       |
| I2C Input Capacitance (each pin)       | C <sub>I2C_IN</sub> | -    | -   | 10.0 | pF       |

## Device Options

The following is a list of factory programmable options. Consult the factory to learn more about the options.

### Interface

I2C and SPI interfaces are available. NOTE: SPI interface is only available with eight (8) lead packages.

### Supply Voltage

Devices are characterized at either 3.3V or 5.0V depending on the options selected. It is suggested to select the option that most closely matches the application supply voltage for best possible performance.

### Speed/Power

There are four options of Speed/Power. These are Fast(F), Noise Reduced(N), Low Power(L) and Sleep mode(S).

Fast Mode(F) Is the fastest operating mode where the device operates with continuous sampling at the fastest internal speed.

Noise Reduced(N): Also operates with continuous samples however the ADC is set for over sampling for noise reduction. The conversion times are resultantly longer than the Fast(F) mode however, there is approximately 1/2 bit reduction in noise.

Low Power(L): Is similar to the Fast(F) mode with exception that the device uses an internal timer to delay between pressure conversions. The internal timer time-out triggers the next conversion cycle. The update rate is commensurately lower for this mode as a result.

Sleep(S): Is similar to the Low Power(L) mode however the trigger to initiate a sample comes from the user instead of an internal timer. This is ideal for very low update rate applications that require low power usage. It is also ideal for synchronizing the data conversions with the host microprocessor.


### Coating

Parylene Coating: Parylene coating provides a moisture barrier and protection from some harsh media. Consult factory for applicability of Parylene for the target application and sensor type.

## Operation Overview

The DLVR is a digital sensor with a signal path that includes a sensing element, a 14 bit analog to digital converter, a DSP and an IO block that supports either an I2C or SPI interface (see Figure 1 below). The sensor also includes an internal temperature reference and associated control logic to support the configured operating mode. The sensing element is powered down while not being sampled to conserve power. Since there is a single ADC, there is also a multiplexer at the front end of the ADC that selects the signal source for the ADC.

Figure 1 - DLVR Essential Model

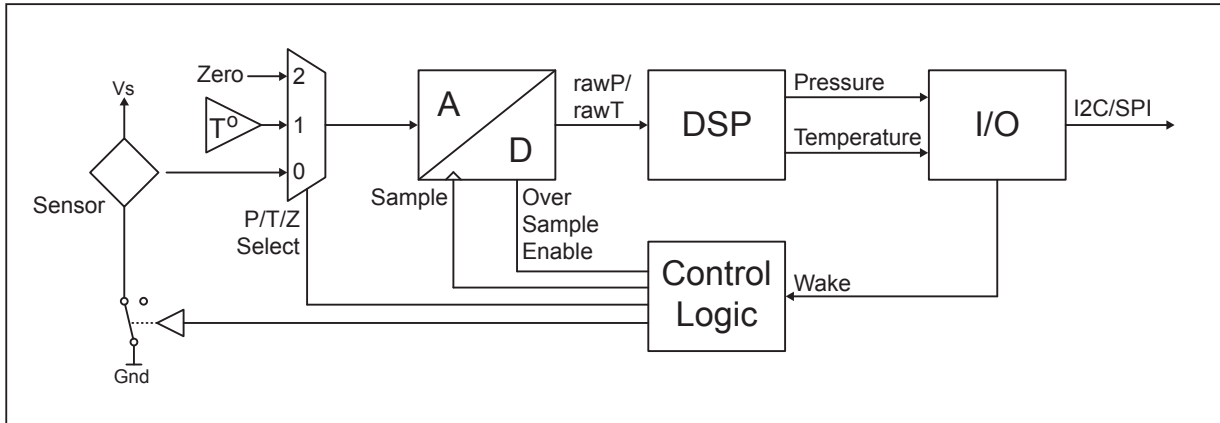

The ADC performs conversions on the raw sensor signal (P), the temperature reference (T) and a zero reference (Z) during an ADC zero cycle. It also has an oversampling mode for a noise reduced output. A conversion cycle that is measuring pressure is called a Normal cycle. A cycle where either a temperature measurement or zeroing is being performed is called a Special cycle.

The DSP receives the converted pressure and temperature information and applies a multi-order transfer function to compensate the pressure output. This transfer function includes compensation for span, offset, temperature effects of span, temperature effects of offset and second order temperature effects of both span and offset. There is also linearity compensation for gage devices and front to back linearity compensation for differential devices.

There are two effective operating modes of the sensor 1) Free Running and 2) Triggered. The control logic performs the synchronization of the internal functions according to the factory programmed Power/Speed option (see Table 1). The Control Logic also determines the Delay between ADC samples, the regularity of the Special cycles and whether or not the ADC performs the Over Sampling. Refer to Figure 2 for the communication model associated with the operating modes listed below.

**Free Running Mode:** In the free running mode, conversion cycles are initiated internally at regular intervals. There are three options available that operate in the Free Running mode (F, N and L). Two of these (F and N) run continuously while the third option (L) has an approximate 6 ms delay between conversion cycles. All three options have Special cycles inserted at regular intervals to accomplish the ADC zeroing and temperature measurements. Two of the options utilize oversampling. Refer to Table 1 for specific option controls.

**Triggered Mode:** In the Triggered Mode, a conversion cycle is initiated by the user (or host uP). There are two available methods to wake the sensor from sleep mode. The first method (Wake All) is to wake the sensor and perform all three measurement cycles (Z, T and P). This provides completely fresh data from the sensor. The second method (Wake P) is to wake the sensor from sleep and only perform the pressure measurement (P). When using this second method, it is up to the user to interleave Wake All commands at regular intervals to ensure there is sufficiently up to date temperature information. Also, the Wake Pressure method is only available from the I2C interface (not available using a SPI interface).



## Operation Overview (Cont'd)

Table 1 - DLVR Control Logic Detail

| Control Logic      |                                      |                |             |                       |                   |                    |                            |
|--------------------|--------------------------------------|----------------|-------------|-----------------------|-------------------|--------------------|----------------------------|
| Power/Speed Option | Power/Speed Description              | Operating Mode | Over Sample | Delay Between Samples | Normal ADC Cycles | Special ADC Cycles | Special ADC Cycle Interval |
| F                  | Fast                                 | Free Running   | No          | No                    | 1 (P)             | 1 (Z or T)         | 255                        |
| N                  | Noise Reduced                        |                | Yes         | No                    | 1 (P)             | 1 (Z or T)         | 255                        |
| L                  | Low Power                            |                | Yes         | Yes                   | 1 (P)             | 1 (Z or T)         | 31                         |
| S                  | Sleep <sup>(1)</sup> (Wake Pressure) | Triggered      | No          | User Defined          | 1 (P)             | n/a                | Never                      |
|                    | Sleep (Wake All)                     |                | No          | User Defined          | 1 (P)             | 2 (Z + T)          | Always                     |

Note 1) Wake from sleep with pressure only reading is not available with SPI interface (I2C only).


Figure 2 - DLVR Communication Model

### Free Running Mode [(F)ast, (N)oise Reduced and (L)ow Power Option]


| Cycle Type         | Normal Cycle |       |         | Normal Cycle |       |         | Special Cycle <sup>(1)</sup> |       |         |
|--------------------|--------------|-------|---------|--------------|-------|---------|------------------------------|-------|---------|
| Internal Operation | DSP          | Delay | ADC (P) | DSP          | Delay | ADC (P) | DSP                          | Delay | ADC (P) |
| New Data Available |              |       |         |              |       |         |                              |       |         |

Note 1: See Table 1 for frequency of Special Cycles

### Triggered Mode - Wake All [(S)leep Option]

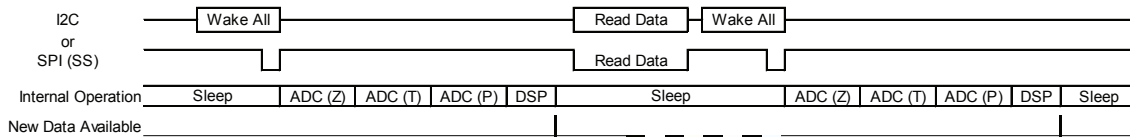

### Triggered Mode - Wake Pressure [(S)leep Option]



## Digital Interface Data Format

For either type of digital interface, the format of data returned from the sensor is the same. The first 16 bits consist of the 2 Status bits followed by the 14-bit the pressure value. The third byte provides the 8 most significant bits of the measured temperature; the fourth byte provides the 3 least significant bits of temperature, followed by 5 bits of undefined filler data. With either interface, the host may terminate the transfer after receiving the first two bytes of data from the sensor, or following the third byte (if just the most-significant 8 bits of temperature are needed). Refer to Table 2 for the overall data format of the sensor. Table 3 shows the Status Bit definition.

Table 2 - Output Data Format

|          |              |              |                 |                 |                         |
|----------|--------------|--------------|-----------------|-----------------|-------------------------|
| D[31:30] | D[29:24]     | D[23:16]     | D[15:8]         | D[7:5]          | D[4:0]                  |
| S[1:0]   | P[13:8]      | P[7:0]       | T[10:3]         | T[2:0]          | X[4:0]                  |
| Status   | Pressure MSB | Pressure LSB | Temperature MSB | Temperature LSB | Filler bits (Undefined) |

### Bit Definitions:

Status (S): Normal/command / busy / diagnostic

Pressure (P): Digital pressure reading

Temperature (T): Compensated temperature reading

Table 3- Status Bit Definitions

|                          |            |                                          |                                                             |
|--------------------------|------------|------------------------------------------|-------------------------------------------------------------|
| [00]                     | [01]       | [10]                                     | [11]                                                        |
| Current Data, no errors. | (Reserved) | Stale Data: Not updated since last read. | Error Condition: electrical fault or configuration invalid. |

## I2C Interface

### I2C Communications Overview

The I2C interface uses a set of signal sequences for communication. The following is a description of the supported sequences and their associated mnemonic. Refer to Figure 3 for the associated usage of the following signal sequences.

**Bus not Busy (I):** During idle periods both data line (SDA) and clock line (SCL) remain HIGH.

**START condition (ST):** A HIGH to LOW transition of SDA line while the clock (SCL) is HIGH is interpreted as START condition. START conditions are always set by the master. Each initial request for a pressure value has to begin with a START condition.

**Slave address (An):** The I<sup>2</sup>C-bus requires a unique address for each device. The DLVR sensor has a preconfigured slave address (0x28). After setting a START condition the master sends the address byte containing the 7 bit sensor address followed by a data direction bit (R/W). A "0" indicates a transmission from master to slave (WRITE), a "1" indicates a data request (READ).

**Acknowledge (A or N):** Data is transferred in units of 8 bits (1 byte) at a time, MSB first. Each data-receiving device, whether master or slave, is required to pull the data line LOW to acknowledge receipt of the data. The Master must generate an extra clock pulse for this purpose. If the receiver does not pull the data line down, a NACK condition exists, and the slave transmitter becomes inactive. The master determines whether to send the last command again or to set the STOP condition, ending the transfer.

**DATA valid (Dn):** State of data line represents valid data when, after a START condition, data line is stable for duration of HIGH period of clock signal. Data on line must be changed during LOW period of clock signal. There is one clock pulse per data bit.

**DATA operation:** The sensor starts to send 4 data bytes containing the current pressure and temperature values. The transmission may be halted by the host after any of the bytes by responding with a NACK.


**STOP condition (P):** LOW to HIGH transition of the SDA line while clock (SCL) is HIGH indicates a STOP condition. STOP conditions are always generated by the master.




## I2C Communications Overview (Cont'd)

Figure 3 - I2C Communication Diagram


1. Start All ( to wake sensor from Sleep mode, Zero ADC, read Temperature and read Pressure )



2. Start Pressure ( to wake sensor from Sleep mode and read Pressure only )



3. Read Data ( with examples of reading pressure, pressure plus 8 bits of temperature and pressure plus 12 bits of temperature )

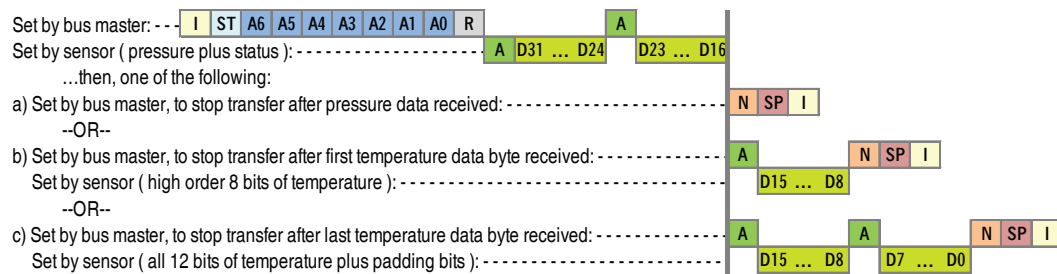

| Bus states       |    |
|------------------|----|
| Idle:            | I  |
| Start:           | ST |
| Stop:            | SP |
| Ack:             | A  |
| Nack:            | N  |
| "Read" bit (1):  | R  |
| "Write" bit (0): | W  |

| Sensor Address |      |
|----------------|------|
| A6 ... A0      |      |
| Default:       | 0x28 |

| Data format       |             |
|-------------------|-------------|
| Status:           | D31 D30     |
| Pressure data:    | D29 ... D16 |
| Temperature data: | D15 ... D5  |
| (padding bits:)   | D4 ... D0   |

Figure 3 illustrates the sequence of signals set by both the host and the sensor for each command. Note that for the DataRead command, the host has the option of responding to the second or third bytes of data with a NACK instead of ACK. This terminates the data transmission after the pressure data, or after the pressure data and upper byte of temperature, have been transmitted. See Figure 6 for the I2C timing details.

## I2C Command Sequence

Depending on whether the Fast, Noise Reduced, Low-Power, or Sleep options have been selected, the command sequence differs slightly. See Figure 3 for details of the three I2C commands.

### Fast, Noise Reduced or Low-power Configuration

The part enters Free Running mode (see table 1) after power-up: it performs an initial complete measurement, writes the calculated data to the output registers, sets the INT pin high, then goes to sleep. After a delay determined by the update rate option, the part will wake up, perform measurements, update the output registers, then go back to sleep. DataRead is the only command recognized; as with the Micropower configuration, if the INT pin is ignored, the host processor can repeat this command until the Status bits indicate an updated reading.

### Sleep Configuration

The part enters Triggered mode (see table 1) after power-up, and waits for a command from the bus master. If the StartAll command is received, the temperature, ADC zero, and pressure readings are all measured, and correction calculations are performed. When valid data is written to the output registers, the INT pin is set high, and the processing core goes back to sleep. The host processor then sends the DataRead command to shift out the updated values. If the INT pin is not monitored, the host can poll the output registers by repeating the DataRead command until the Status bits indicate that the values have been updated (see Tables 2 and 3). The response time depends on configuration options (refer to Table 1 and Performance Characteristics).

Depending on the application, pressure measurements may be performed by sending the StartPressure command, which only measures the pressure value and uses previously measured temperature data in calculating the compensated output value. This presents the result faster (in about 1/3 the delay time) than the StartAll command. This can be a useful method to synchronize the sensor with the hose controller as well as attaining the fastest overall response time without Special cycles occurring at unwanted times. The system designer should determine the interval required for sending StartAll commands, necessary to refresh the temperature

## I2C Exceptions

1. Sending a Start condition, then a Stop condition, without any transitions on the CLK line, creates a communication error for the next communication, even if the next start condition is correct and the clock pulse is applied. A second Start condition must be set, which clears the error and allows communication to proceed.
2. The Restart condition—a falling SDA edge during data transmission when the CLK clock line is still high—creates the same stall/deadlock. In the following data request, an additional Start condition must be sent for correct communication.
3. A falling SDA edge is not allowed between the start condition and the first rising SCL edge. If using an I2C address with the first bit 0, SDA must be held low from the start condition through the first bit.



## SPI Interface

### SPI Command Sequence

DLVR sensors using the SPI interface option provide 3 signals for communication: SCLK, SS (Slave Select), and MISO. This read-only signaling uses a hardware protocol to control the sensor, differing slightly with the speed/power option selected as described below:

**Fast(F), Noise Reduced(N) and Low-Power(L) Configurations:** After power-up, the part enters Free Running mode and begins its periodic conversion cycle, at the interval determined by the programmed Power/Speed option. This is the simplest configuration. The only bus interaction with the host is the SPI DataRead operations. Polling the sensor at a rate slower than the internal update rate will minimize bus activity and ensure that new values are presented with each transfer. Note that the Status bits should still be checked to verify updated data and the absence of error conditions.

**Sleep(S) Configuration:** As with the I2C option, the part enters Triggered mode after power-up, and waits for a command from the bus master. To wake the part and start a measurement cycle, the SS pin must be driven low by the host for at least 8 $\mu$ sec, then driven high. This can be done by shifting a dummy byte of 8 bits from the sensor. This bus activity can be considered the SPI StartAll command, where the rising edge of SS is the required input to start conversion. Updated conversion data is written to the output registers after a period dependent on configuration options ( see Performance Characteristics). After this update of the registers, the core goes to an inactive (sleep) state. The DataRead command simply consists of shifting out 2, 3, or 4 bytes of data from the sensor. The host can check the Status bits of the output to verify that new data has been provided. The part remains inactive following this read operation, and another StartAll operation is needed to wake the part when the next conversion is to be performed.

### SPI Bit Pattern

The sequence of bits and bus signals are shown in the following illustration (Figure 4). Refer to Figure 5 in the Interface Timing Diagram section for detailed timing data. As previously described, the incoming data may be terminated by raising SS after 2, 3, or 4 bytes have been received as illustrated below.

Figure 4 - SPI Bit Pattern

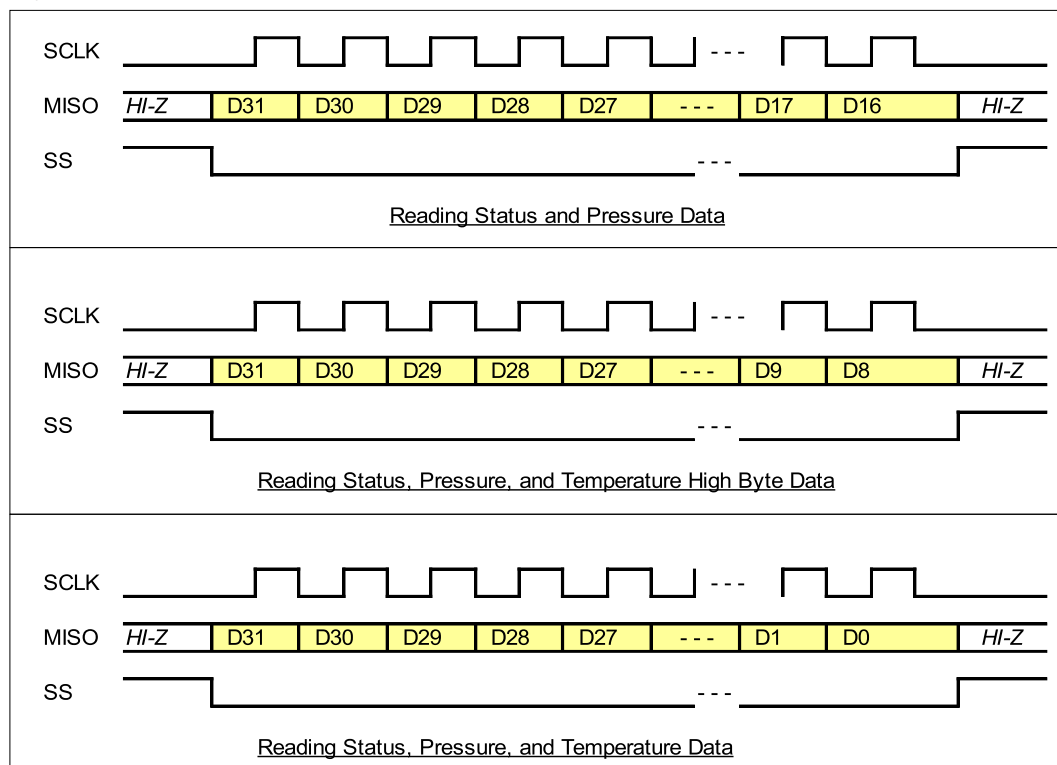


Figure 5 - SPI Timing Diagram


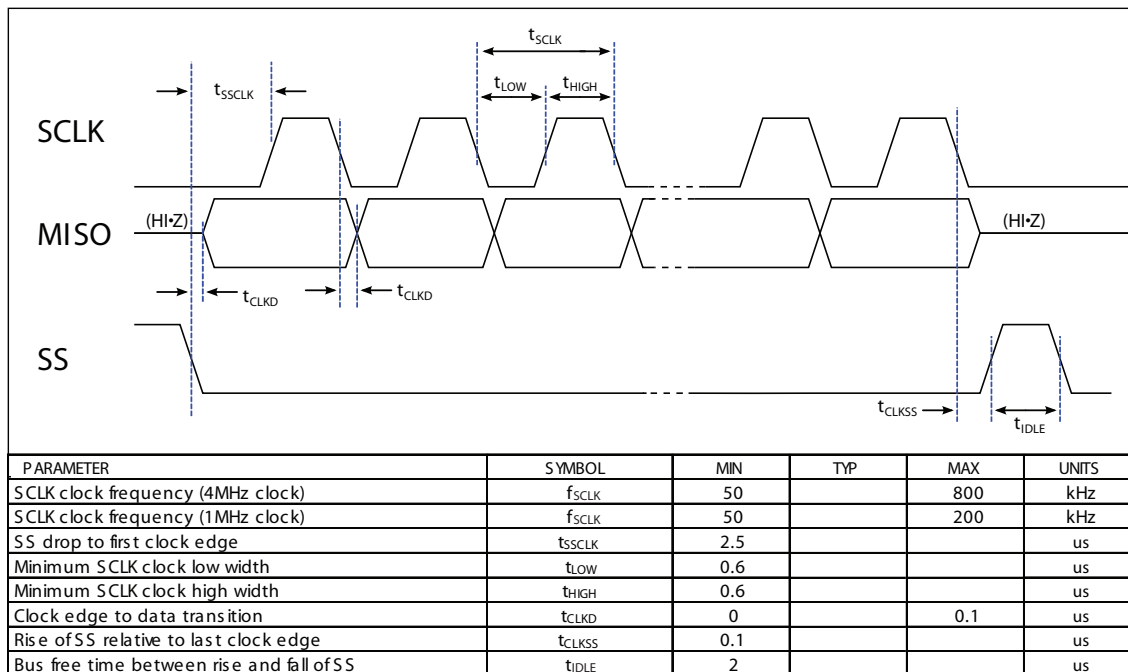


Figure 6 - I2C Timing Diagram

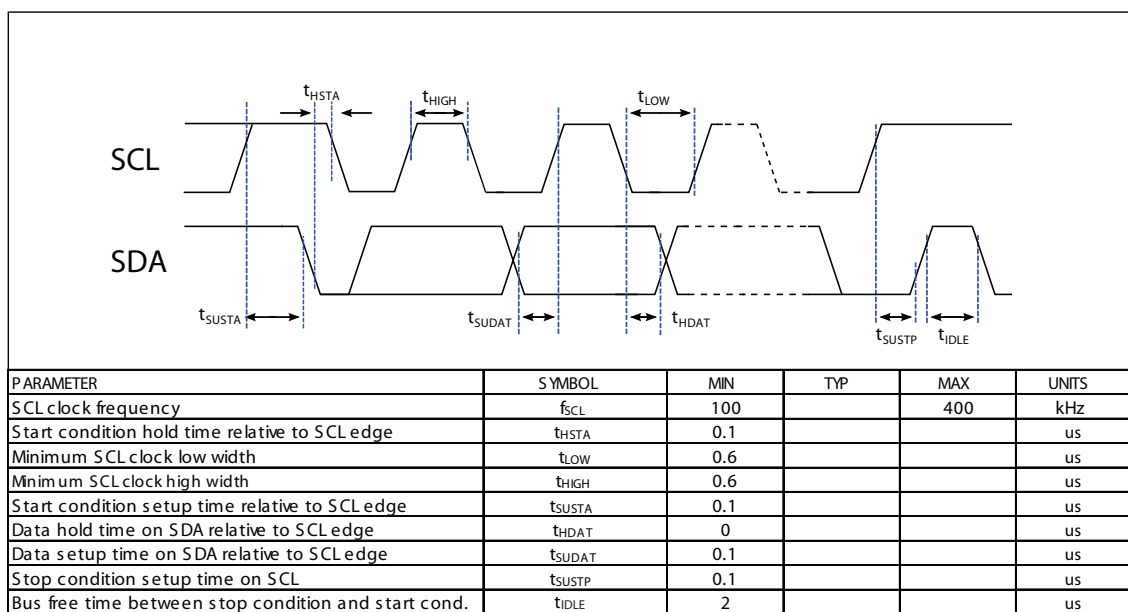

## How to Order

Refer to Table 4 for configuring a standard base part number which includes the pressure range, package and temperature range. Table 5 shows the available configuring options. The option identifier is required to complete the device part number. Refer to Table 6 for the available devices packages.

Example P/N with options: DLVR-L02D-E1NS-C-NI3F











Table 4 - How to configure a base part number

| ORDERING INFORMATION | SERIES | PRESSURE RANGE |               | PACKAGE |                  |                         |  |           |             |           |             | TEMPERATURE RANGE |             |
|----------------------|--------|----------------|---------------|---------|------------------|-------------------------|--|-----------|-------------|-----------|-------------|-------------------|-------------|
|                      | ID     | ID             | Description   | Base    | Port Orientation |                         |  | Lid Style |             | Lead Type |             | ID                | Description |
|                      |        | ID             | Description   | ID      | ID               | Description             |  | ID        | Description | ID        | Description | ID                | Description |
|                      |        |                |               |         |                  |                         |  |           |             |           |             |                   |             |
|                      | DLVR   | L01D           | ±1 inH2O      | E       | 1                | Dual Port Same Side     |  | N         | Non-Barbed  | S         | SIP         | C                 | Commercial  |
|                      |        | L02D           | ±2 inH2O      |         | 2                | Dual Port Opposite Side |  | B         | Barbed      | D         | DIP         | I                 | Industrial  |
|                      |        | L05D           | ±5 inH2O      |         |                  |                         |  |           |             | J         | J-Lead SMT  |                   |             |
|                      |        | L10D           | ±10 inH2O     |         |                  |                         |  |           |             |           |             |                   |             |
|                      |        | L30D           | ±30 inH2O     |         |                  |                         |  |           |             |           |             |                   |             |
|                      |        | L60D           | ±60 inH2O     |         |                  |                         |  |           |             |           |             |                   |             |
|                      |        | L01G           | 0 to 1 inH2O  |         |                  |                         |  |           |             |           |             |                   |             |
|                      |        | L02G           | 0 to 2 inH2O  |         |                  |                         |  |           |             |           |             |                   |             |
|                      |        | L05G           | 0 to 5 inH2O  |         |                  |                         |  |           |             |           |             |                   |             |
|                      |        | L10G           | 0 to 10 inH2O |         |                  |                         |  |           |             |           |             |                   |             |
|                      |        | L30G           | 0 to 30 inH2O |         |                  |                         |  |           |             |           |             |                   |             |
|                      |        | L60G           | 0 to 60 inH2O |         |                  |                         |  |           |             |           |             |                   |             |
| Example              | DLVR   | -              | L02D          | -       | E                | 1                       |  | N         |             | S         |             | -                 | C           |

Table 5 - How to configure an option identifier




| ORDERING INFORMATION | COATING |                  | INTERFACE |             | SUPPLY VOLTAGE |             | SPEED/POWER |               |
|----------------------|---------|------------------|-----------|-------------|----------------|-------------|-------------|---------------|
|                      | ID      | Description      | ID        | Description | ID             | Description | ID          | Description   |
|                      | N       | No Coating       | I         | I2C         | 3              | 3.3V        | F           | Fast          |
|                      | P       | Parylene Coating | S         | SPI         | 5              | 5.0V        | N           | Noise reduced |
|                      |         |                  |           |             |                |             | L           | Low Power     |
|                      |         |                  |           |             |                |             | S           | Sleep Mode    |
| Example              | N       |                  | I         |             | 3              |             | F           |               |

TABLE 6: Available E-Series Package Configurations

| Port Orientation        | Non-Barbed Lid Lead Style                                                                   |                                                                                             |                                                                                             |                 | Barbed Lid Lead Style                                                                       |                                                                                              |            |                 |
|-------------------------|---------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|-----------------|---------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|------------|-----------------|
|                         | SIP                                                                                         | DIP                                                                                         | J Lead SMT                                                                                  | Low Profile DIP | SIP                                                                                         | DIP                                                                                          | J Lead SMT | Low Profile DIP |
| Dual Port Same Side     | <br>E1NS | <br>E1ND | <br>E1NJ | N/A             | <br>E1BS | <br>E1BD | N/A        | N/A             |
| Dual Port Opposite Side | <br>E2NS | <br>E2ND | <br>E2NJ | N/A             | <br>E2BS | <br>E2BD | N/A        | N/A             |
| Single Port (Gage)      | N/A                                                                                         | N/A                                                                                         | N/A                                                                                         | N/A             | N/A                                                                                         | N/A                                                                                          | N/A        | N/A             |

## Package Drawings

### E1NS Package

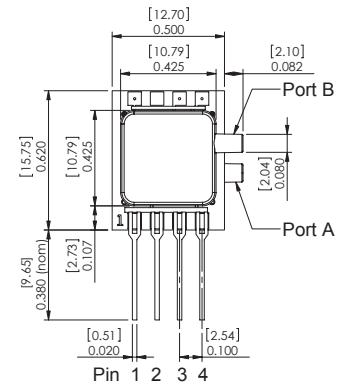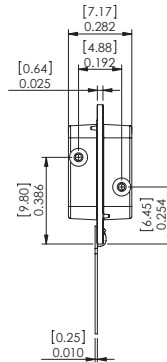




#### Pinout

- 1) Gnd
- 2) Vs
- 3) SDA
- 4) SCL

#### NOTES

- 1) Dimensions are in inches [mm]
- 2) For suggested pad layout, see drawing: PAD-01

### E1BS Package

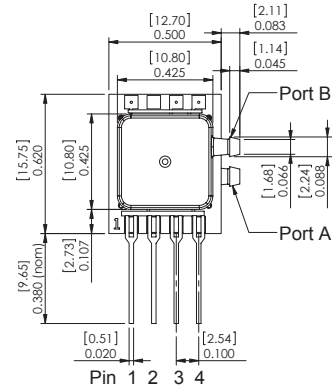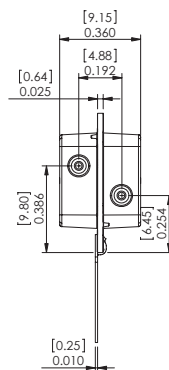

#### Pinout

- 1) Gnd
- 2) Vs
- 3) SDA
- 4) SCL




#### NOTES

- 1) Dimensions are in inches [mm]
- 2) For suggested pad layout, see drawing: PAD-01



## Package Drawings (Cont'd)




### E2NS Package

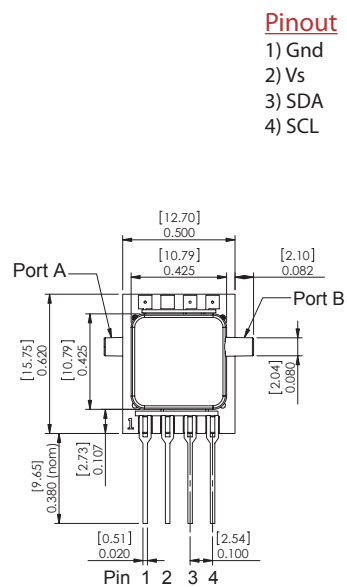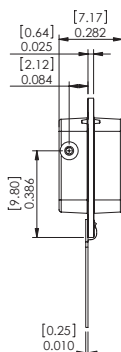

#### NOTES

- 1) Dimensions are in inches [mm]
- 2) For suggested pad layout, see drawing: PAD-01

### E2BS Package

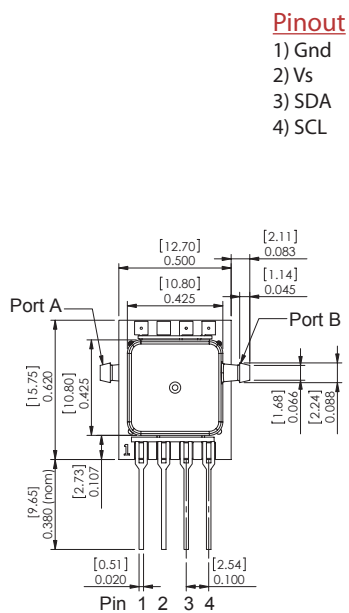
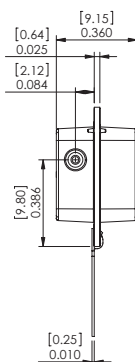



#### NOTES

- 1) Dimensions are in inches [mm]
- 2) For suggested pad layout, see drawing: PAD-01

## Package Drawings (Cont'd)

### E1ND Package

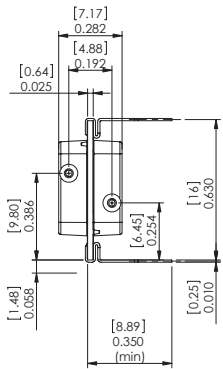


#### NOTES




- 1) Dimensions are in inches [mm]
- 2) For suggested pad layout, see drawing: PAD-03

#### Pinout

- 1) Gnd
- 2) Vs
- 3) SDA/MISO
- 4) SCL/SCLK
- 5) INT/SS
- 6) Do Not Connect
- 7) Do Not Connect
- 8) Do Not Connect

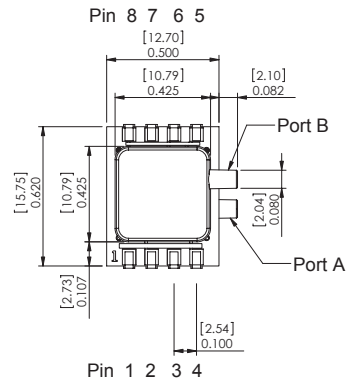

### E1BD Package

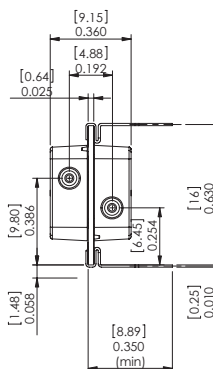


#### NOTES

- 1) Dimensions are in inches [mm]
- 2) For suggested pad layout, see drawing: PAD-03




#### Pinout

- 1) Gnd
- 2) Vs
- 3) SDA/MISO
- 4) SCL/SCLK
- 5) INT/SS
- 6) Do Not Connect
- 7) Do Not Connect
- 8) Do Not Connect

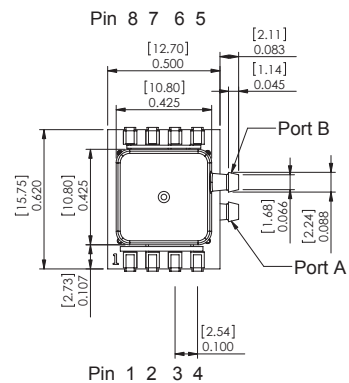

## Package Drawings (Cont'd)

### E2ND Package

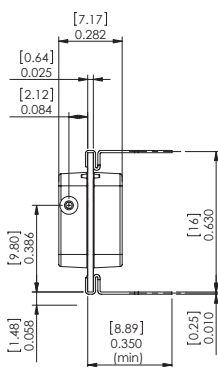


#### NOTES




- 1) Dimensions are in inches [mm]
- 2) For suggested pad layout, see drawing: PAD-03

#### Pinout

- 1) Gnd
- 2) Vs
- 3) SDA/MISO
- 4) SCL/SCLK
- 5) INT/SS
- 6) Do Not Connect
- 7) Do Not Connect
- 8) Do Not Connect

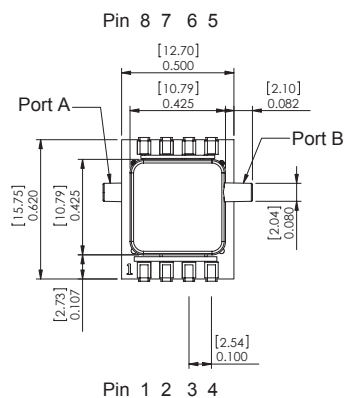

### E2BD Package

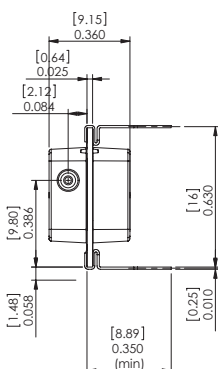


#### NOTES

- 1) Dimensions are in inches [mm]
- 2) For suggested pad layout, see drawing: PAD-03



#### Pinout

- 1) Gnd
- 2) Vs
- 3) SDA/MISO
- 4) SCL/SCLK
- 5) INT/SS
- 6) Do Not Connect
- 7) Do Not Connect
- 8) Do Not Connect

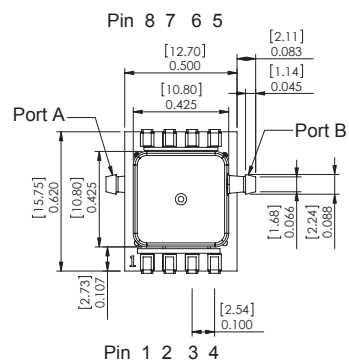


## Package Drawings (Cont'd)


### E1NJ Package



DETAIL A  
SCALE 4 : 1



A

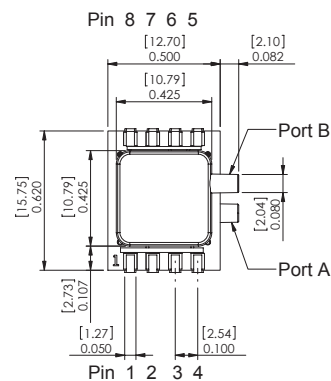



#### Pinout

- 1) Gnd
- 2) Vs
- 3) SDA/MISO
- 4) SCL/SCLK
- 5) INT/SS
- 6) Do Not Connect
- 7) Do Not Connect
- 8) Do Not Connect


#### NOTES

- 1) Dimensions are in inches [mm]
- 2) For suggested pad layout, see drawing: PAD-10


### E2NJ Package



DETAIL A  
SCALE 4 : 1



A

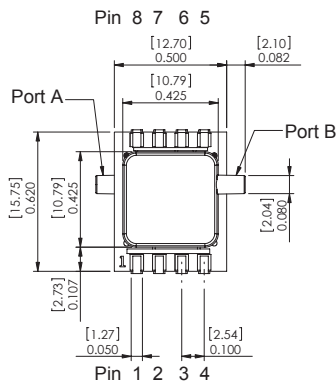

#### Pinout


- 1) Gnd
- 2) Vs
- 3) SDA/MISO
- 4) SCL/SCLK
- 5) INT/SS
- 6) Do Not Connect
- 7) Do Not Connect
- 8) Do Not Connect

#### NOTES


- 1) Dimensions are in inches [mm]
- 2) For suggested pad layout, see drawing: PAD-10




## Suggested Pad Layout

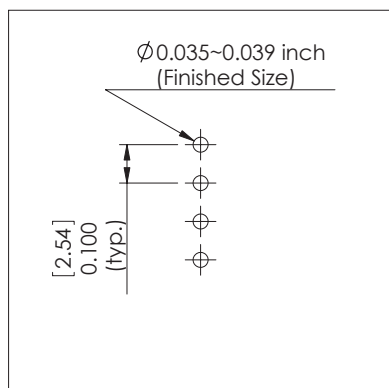

PAD-01

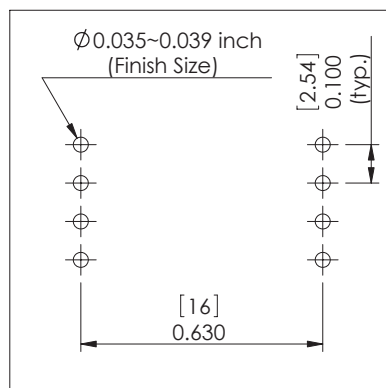

PAD-03

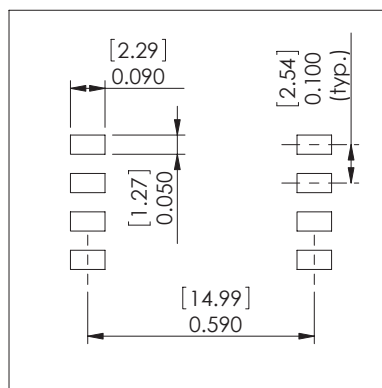

PAD-10

## Product Labeling

**All Sensors**  
**DLVR-L02D**  
**E1NS-C**  
**NI3F**  
**R9J21-3**

Company

Part Number

Lot Number

Example Device Label