



Printed: Feb 16, 2006



PRODUCT NUMBER	UNREELING DIRECTION	PLATING	WIRE RANGE	CRIMP HEIGHT	INSULATION RANGE	NOTES
PN						
75972-001	CW	50u"/1.27uM MIN Ni UNDERPLATE, OVERPLATE WITH 30u"/.76uM GOLD IN CONTACT AREA. A GOLD FLASH ON REMAINDER. CARRIER STRIP IS DEVOID OF GOLD.	22 TO 26 AWG	.035 ±.001 .89 ±.03	.028 .71 TO .103 2.62	_____
75972-001E	CW					_____
75972-004	CCW					_____
75972-004E	CCW					_____
75972-005	LOOSE PIECE	50u"/1.27uM MIN Ni UNDERPLATE, OVERPLATE WITH 30u"/.76uM GOLD IN CONTACT AREA. 50u"/1.27uM MIN TIN-LEAD IN AREA "A".				NOTE 3
75972-006	CW					_____
75972-007	CCW					_____
75972-008	LOOSE PIECE					_____

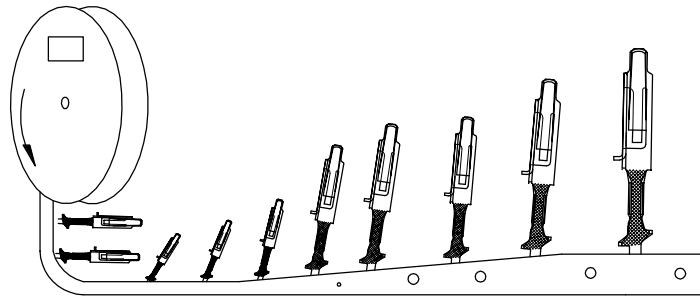

Unreeling Direction
Left to Right Into
Applicator

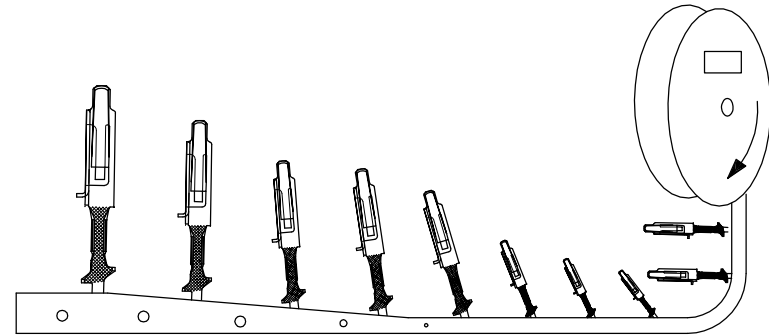

Unreeling Direction
Right to Left Into
Applicator

mat'l. code				tolerances unless otherwise specified				CUSTOMER COPY		 www.fciconnect.com			
ltr	ecn no	dr	date	linear	.XX ±.01/.X±.3				projection 	title SERPENT			
H					.XXX ±.005/.XX±.13								
					.XXXX ±.0020/.XXX±.051								
				angles	0° ±2°				 INCH/MM	product family SERPENT size dwg no 75972			
				dr	J.MUSTARD	10/13/90							
				enr	H.SUNDY	10/13/90							
				chr	H.SUNDY	10/13/90		scale 15:1	A				
				appd	H.SUNDY	10/13/90							
sheet index		revision sheet											

cage code
22526