




Weight: 1.0 g Unit: mm

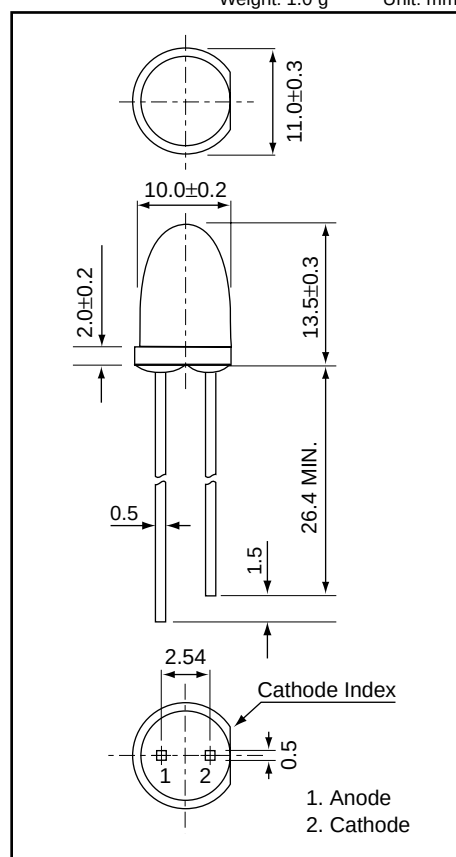

AND190GCP

GaP Green Light Emission

T-3 Package (10 mm)

Features

- Peak wavelength ($\lambda_p = 570$ nm) high bright emission
- All plastic mold type, clear colorless lens
- Low drive current, (forward current = 1 to 20 mA)
- Excellent On-Off contrast ratio
- Fast response time, capable of pulse operation
- High power luminous intensity
- Suitable for Outdoor Message Signboards

Maximum Ratings ($T_a = 25^\circ\text{C}$)

Characteristics	Symbol	Rating	Unit
Forward Current	I_F	30	mA
Reverse Voltage	V_R	5	V
Power Dissipation	P_D	125	mW
Operating Temperature Range	T_{Opr}	-40 to 85	$^\circ\text{C}$
Storage Temperature Range	T_{Stg}	-40 to 100	$^\circ\text{C}$

Electro-Optical Characteristics ($T_a = 25^\circ\text{C}$)

Characteristics	Symbol	Test Condition	Minimum	Typical	Maximum	Unit
Forward Voltage	V_F	$I_F = 20$ mA	—	2.15	2.8	V
Reverse Current	I_R	$V_R = 4$ V	—	—	100	μA
Luminous Intensity	I_V	$I_F = 20$ mA	370	700	—	mcd
Peak Emission Wavelength	λ_p	$I_F = 20$ mA	—	570	—	nm
Spectral Line Half Width	$\Delta\lambda$	$I_F = 20$ mA	—	30	—	nm
Dominant Wavelength	λ_d	$I_F = 20$ mA	—	566	—	nm
Full Viewing Angle	θ	$I_V = 1/2$ Peak	—	8	—	degree

Precaution

Please be careful of the following:

1. Soldering temperature: 260°C max
Soldering time: 5 sec. max
Soldering portion of lead: up to 1.6 mm from the body of the device
2. The lead can be formed up to 5 mm from the body of the device without forming stress.
Soldering should be performed after the lead forming.

