
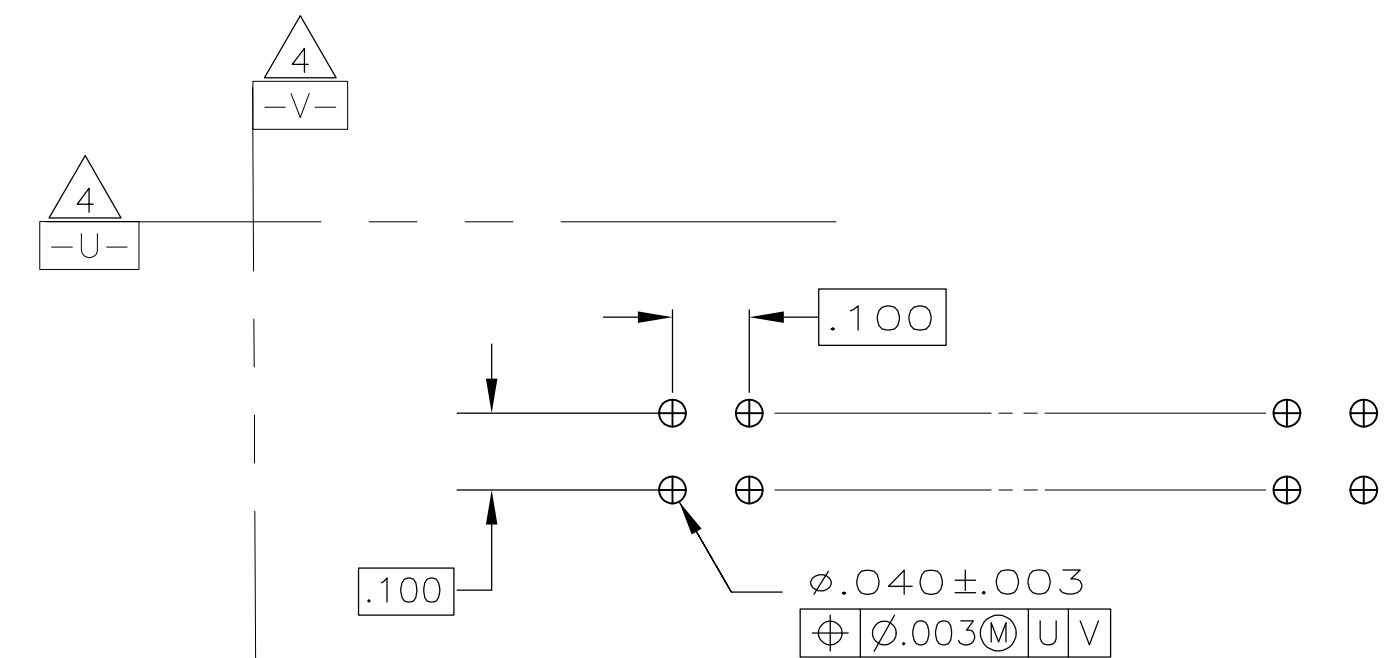
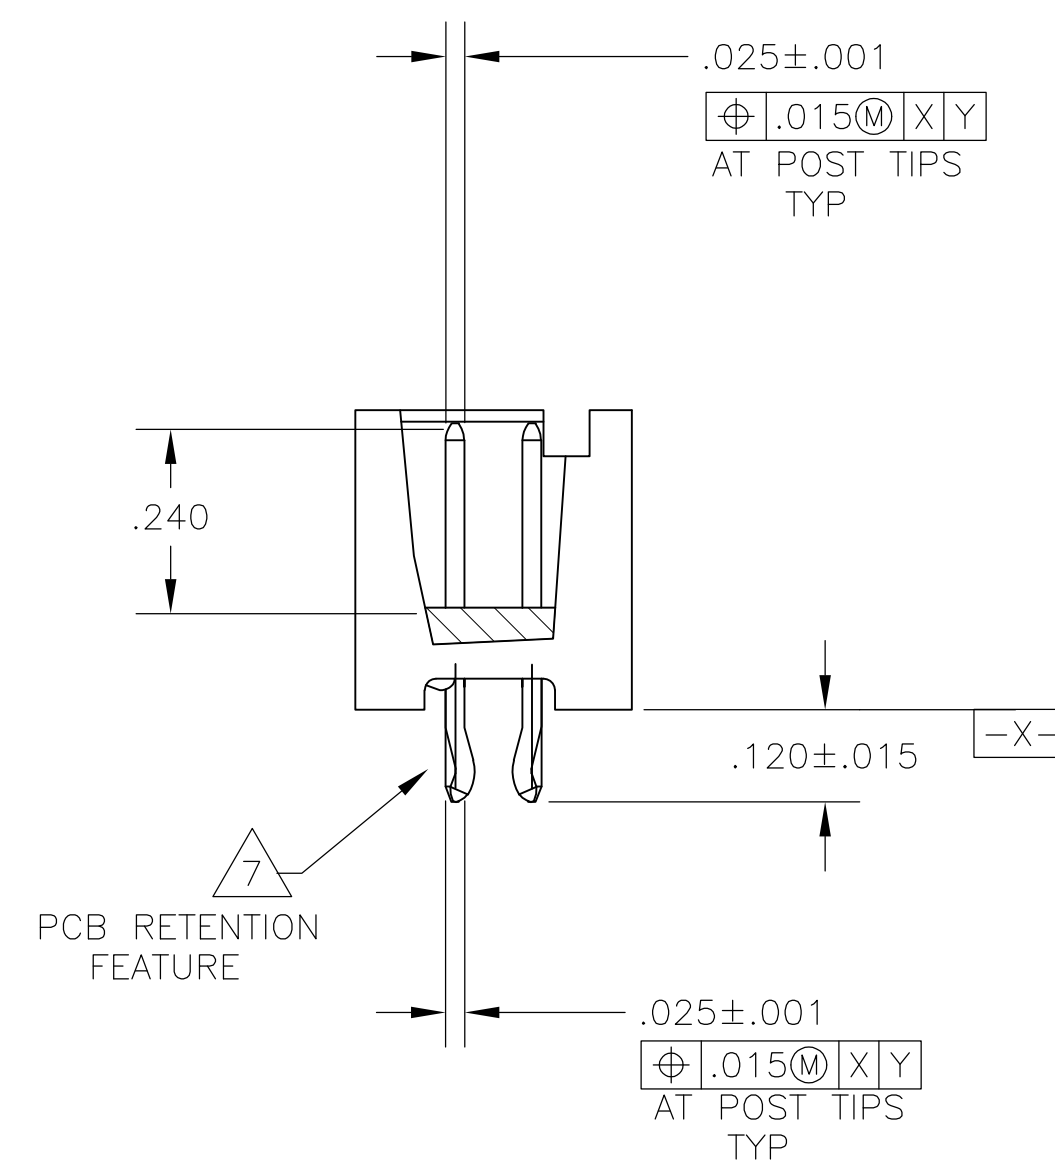
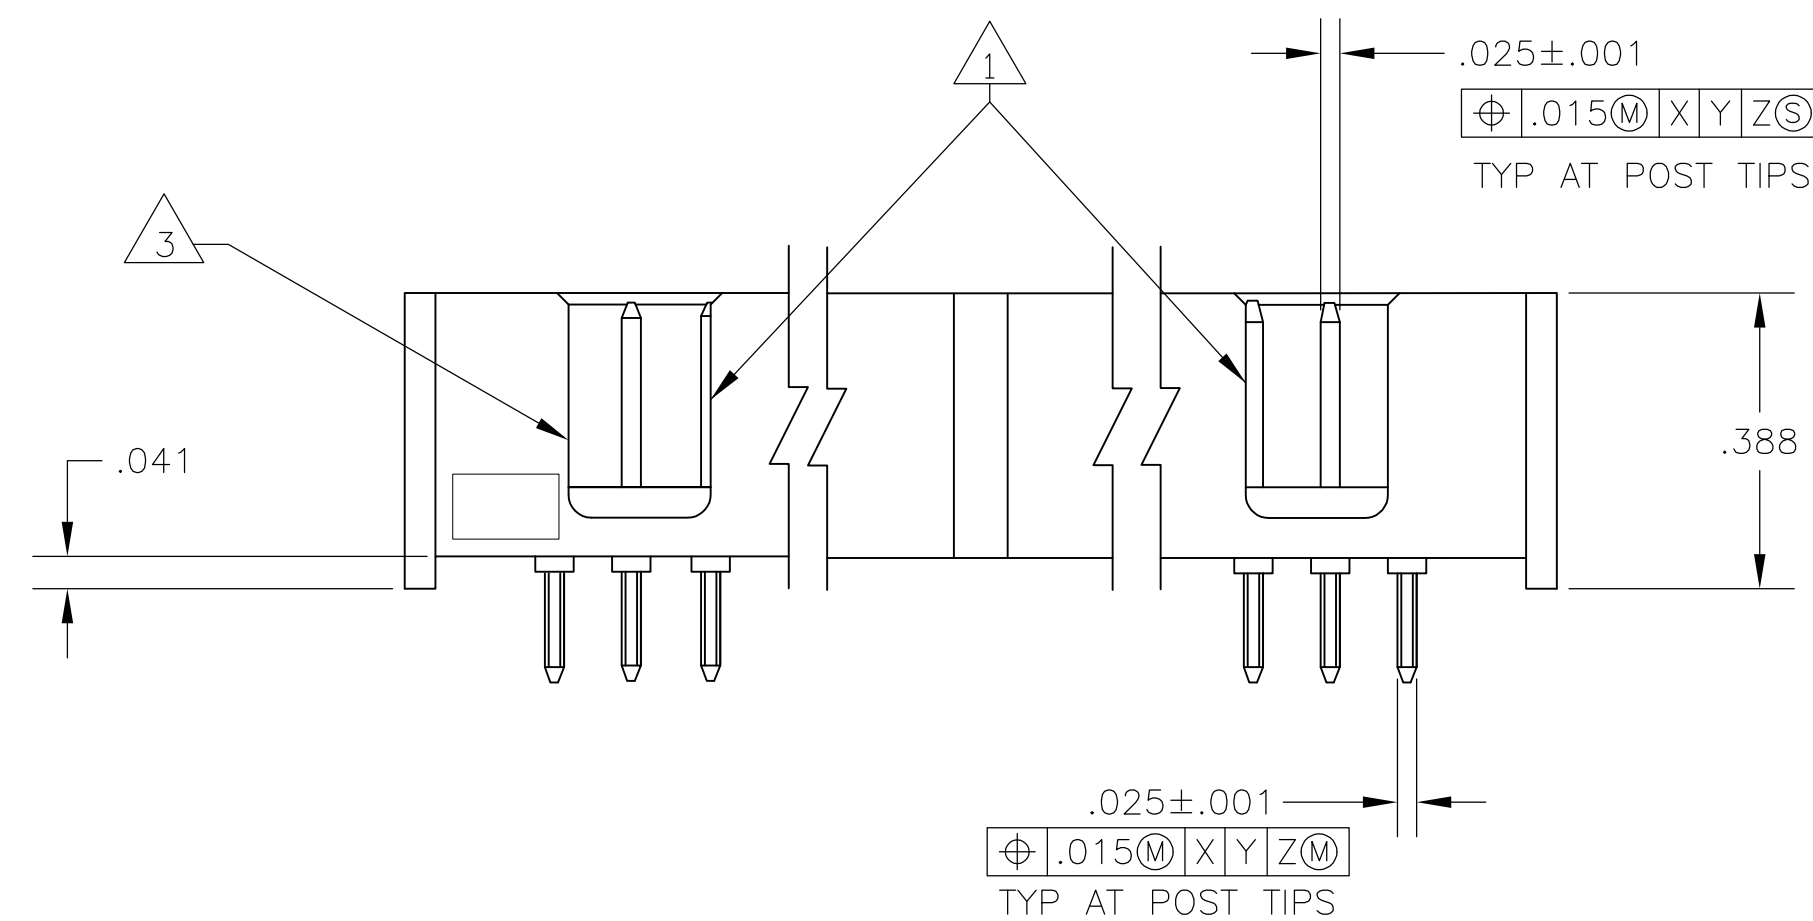


LOC	DIST	REVISIONS					
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			E	REVISED PER ECO-11-003735	17MAR2011	CJV	SLB

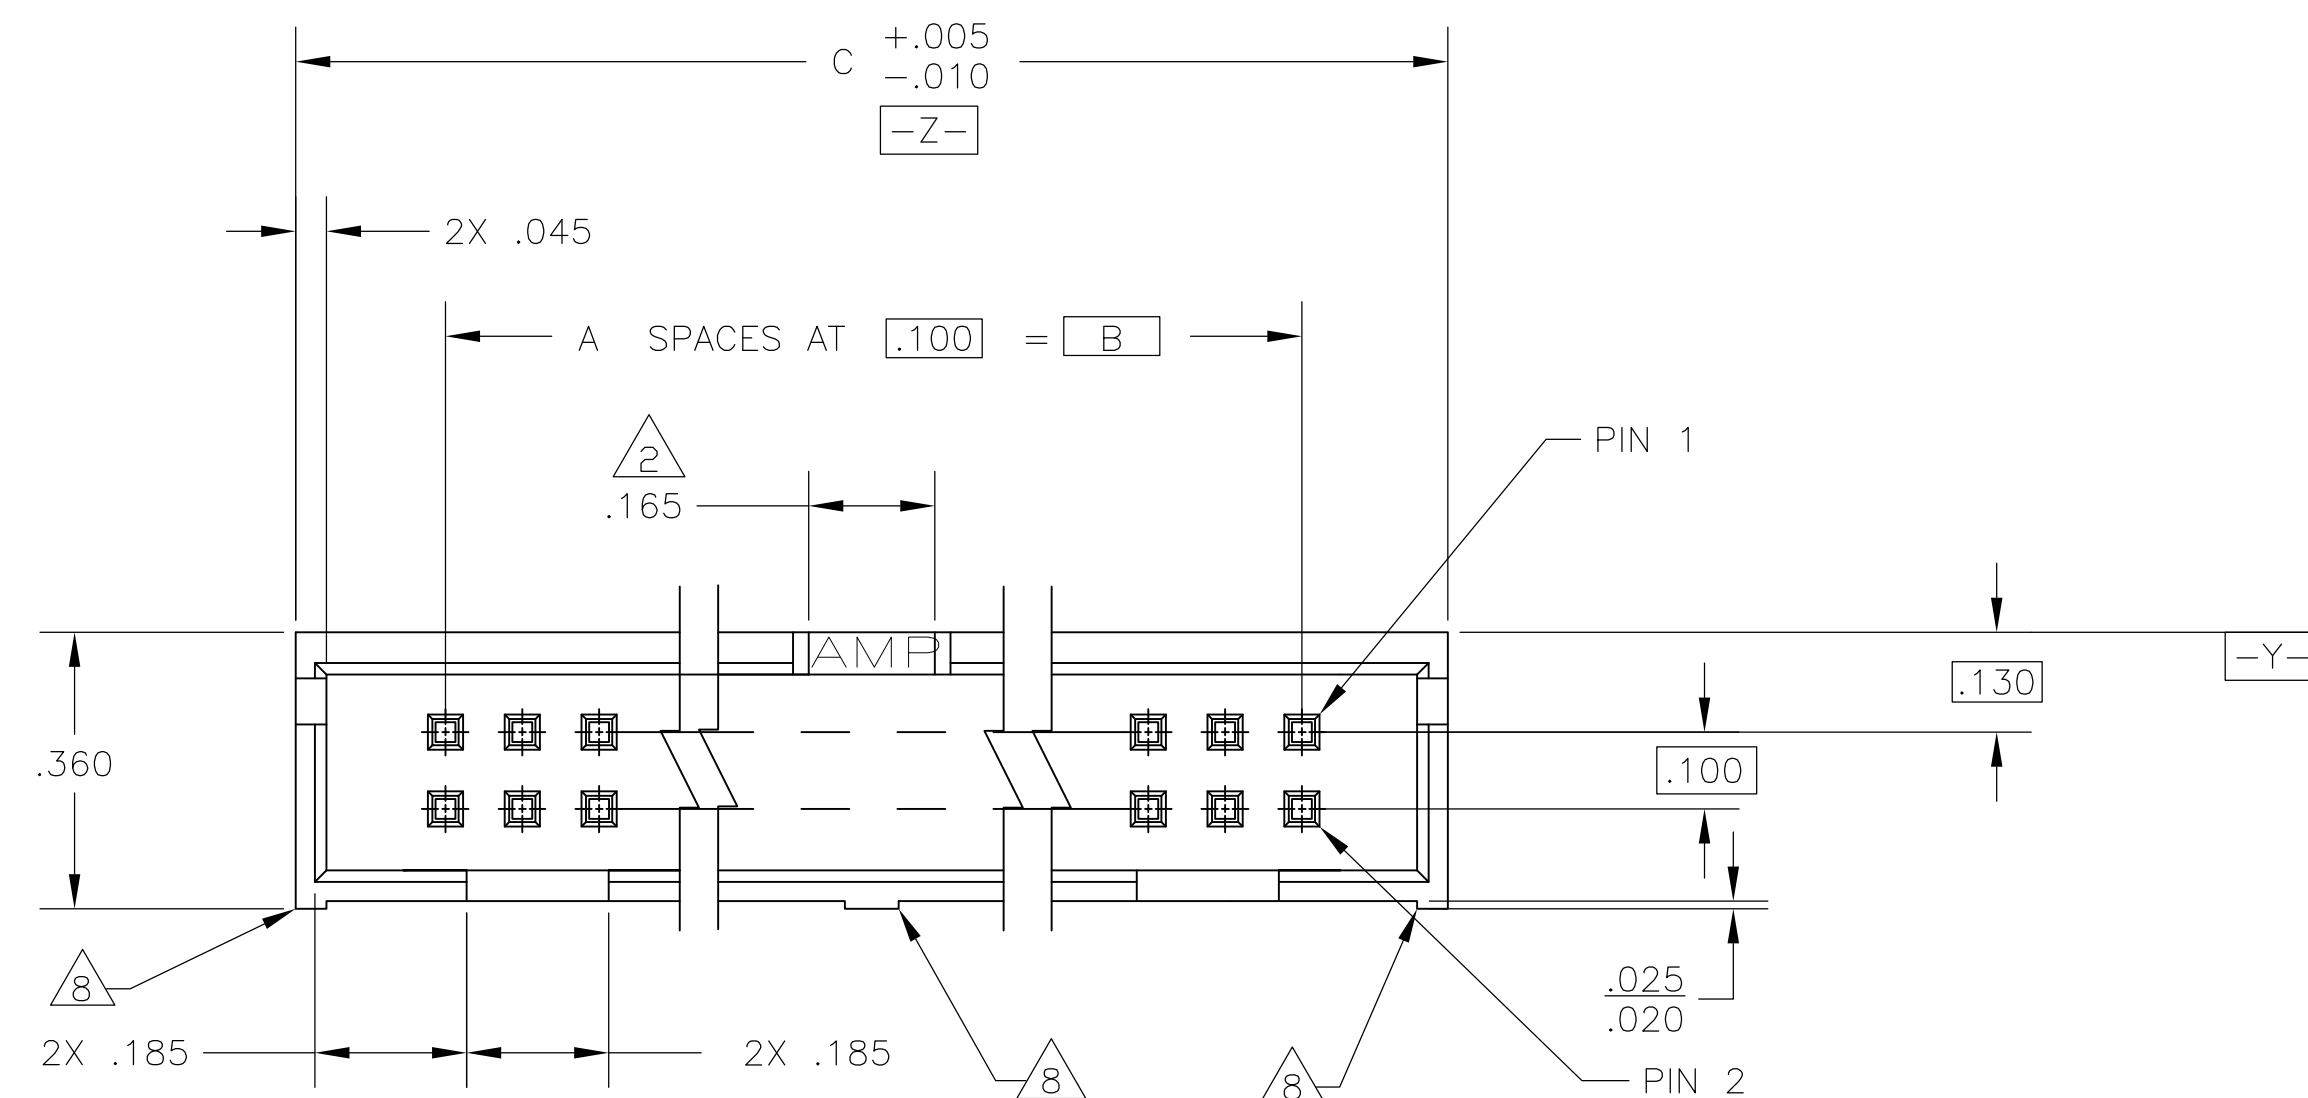

RECOMMENDED PCB LAYOUT

3.300	2.900	29	60	1-5104338-0
2.800	2.400	24	50	5104338-9
2.300	1.900	19	40	5104338-8
2.000	1.600	16	34	5104338-7
1.600	1.200	12	26	5104338-6
1.500	1.100	11	24	5104338-5
1.300	.900	9	20	5104338-4
1.100	.700	7	16	5104338-3
1.000	.600	6	14	5104338-2
.800	.400	4	10	5104338-1
C	B	A	NO OF POSN	ASSEMBLY PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG. 01 NOV 05 B. LATUCCA CHK 01 NOV 05 J. GERACE APVD 01 NOV 05 M. WALMSLEY		 TE Connectivity	
DIMENSIONS: INCHES 		TOLERANCES UNLESS OTHERWISE SPECIFIED: PRODUCT SPEC 108-40018 APPLICATION SPEC —		NAME HEADER ASSY. VERTICAL, LOW PROFILE, AMP-LATCH —	
MATERIAL 		FINISH 		SIZE A1	CAGE CODE 00779
		WEIGHT —		DRAWING NO C-5104338	
CUSTOMER DRAWING				SCALE 4:1	SHEET 1 of 1
				REV F	