

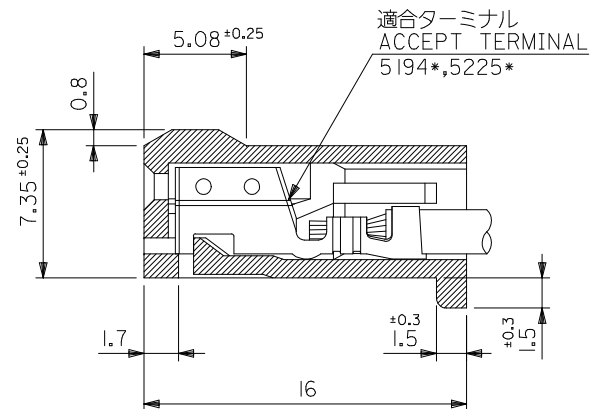


10 9 8 7 6 5 4 3 2 1

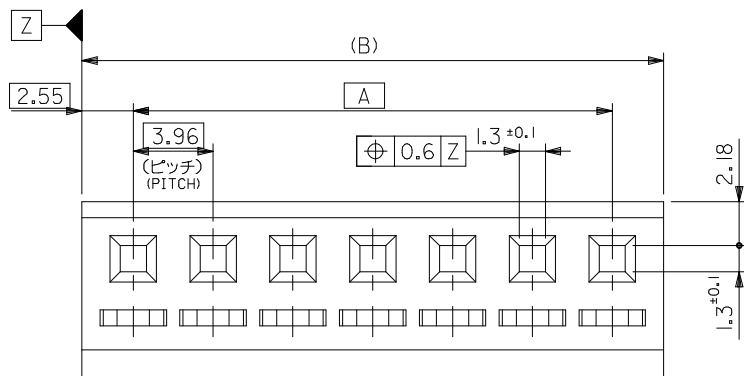

注記
NOTES

- 各部の反りは0.5最大。
WARPING : 0.5 MAX.
- サーキットNO.はNO."I"のみ表示。
CIRCUIT NO. : I ONLY.

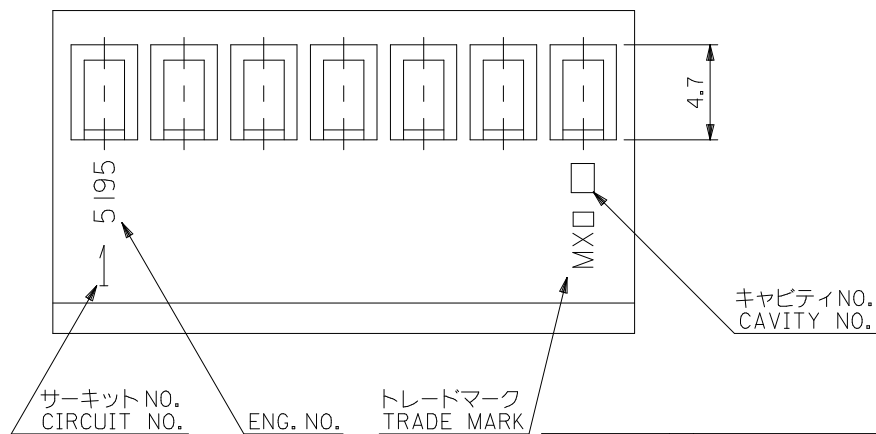

24.9	19.8	39-01-1065	5195-063	6
20.94	15.84	39-01-1055	5195-053	5
13.02	7.92	39-01-1035	5195-033	3
9.06	3.96	39-01-1025	5195-023	2
B	A	EDP NO.	MATERIAL NO.	極数 NO. OF CKTS.
			MODEL NO.	5195-N3
			THIRD ANGLE PROJECTION	

サーキットNO.
CIRCUIT NO.

ENG. NO.

トレードマーク
TRADE MARK

REVISED EC NO: J2009-0049 DRWN: MAKURAA CHKD: T. HIRUYAMA APPR: NUKITA G	GENERAL TOLERANCES (UNLESS SPECIFIED)	
	10 UNDER	± 0.2
	10 OVER 30 UNDER	± 0.25
	30 OVER	± 0.3
DESCRIPTION REV	ANGULAR ± 3 °	
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	

DIMENSION STYLE MM ONLY	
DRAWN BY T. ASAKAWA	DATE '95/5/9
CHECKED BY S. A	DATE '95/5/9
APPROVED BY M. FUKUSHIMA	DATE '95/5/9
MATERIAL NO.	
SEE TABLE	
SIZE A3	

SCALE 4:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
TITLE SPOX 3.96 PITCH RECEPTACLE HOUSING			
MOLEX INCORPORATED			
DOCUMENT NO. SD-5195-002			SHEET NO. 1 OF 1
THIS INFORMATION THAT IS PROPRIETARY TO MOLEX SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			

材料
MATERIAL
ナイロン66, UL94V-0
NYLON66, UL94V-0

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[39-01-1055](#)