


SF1090A-1 350 MHz SAW Filter



- Designed for WLAN IF Applications
- Low Insertion Loss
- 9.1 x 7.1 mm Surface-Mount Case
- Unbalanced Input and Output
- Alternate-Connection Version of SF1090A



Characteristic	Sym	Min	Typ	Max	Units	Notes
Nominal Center Frequency	fc		350.000		MHz	1
Passband	Insertion Loss at fc	IL	10	13.0	dB	1, 2
	1 dB Passband	BW ₁	±500		kHz	
	3 dB Passband	BW ₃	±600	±880		
	Group Delay Variation over fc ±600 kHz	GDV	<100	200	ns _{P-P}	
Rejection	fc-2.0 to fc-1.8 and fc+1.8 to fc+2.0 MHz		30		dB	1, 2, 3
	fc-7.0 to fc-2.0 and fc+2.0 to fc+7.0 MHz		40			
	At < fc-7.0 MHz and > fc+7.0 MHz		50			
Operating Temperature Range	T _A	-20		+70	°C	1

Impedance Matching to 50 Ω unbalanced	External L-C
Case Style	SM9171-10 9.1 x 7.1 mm Nominal Footprint
Lid Symbolization (XX = 2-character date code)	RFM 1090A-1 XX

Absolute Maximum Ratings

Rating	Value	Units
Maximum Incident Power in Passband	+10	dBm
Max. DC voltage between any 2 terminals	30	VDC
Storage Temperature Range	-40 to +85	°C
Max Soldering Profile	265°C for 10 s	

Electrical Connections

Connection	Terminals
Port 1 Hot	1
Port 1 Gnd Return	4
Port 2 Hot	6
Port 2 Gnd Return	9
Case Ground	All Others

Notes:

1. Unless noted otherwise, all specifications apply over the operating temperature range with filter soldered to the specified demonstration board with impedance matching to 50 Ω and measured with 50 Ω network analyzer.
2. Unless noted otherwise, all frequency specifications are referenced to the nominal center frequency, fc.
3. Rejection is measured as attenuation below the minimum IL point in the passband. Rejection in final user application is dependent on PCB layout and external impedance matching design. See Application Note No. 42 for details.
4. "LRIP" or "L" after the part number indicates "low rate initial production" and "ENG" or "E" indicates "engineering prototypes."
5. The design, manufacturing process, and specifications of this filter are subject to change.
6. Either Port 1 or Port 2 may be used for either input or output in the design. However, impedances and impedance matching may vary between Port 1 and Port 2, so that the filter must always be installed in one direction per the circuit design.
7. US and international patents may apply.
8. RFM, stylized RFM logo, and RF Monolithics, Inc. are registered trademarks of RF Monolithics, Inc.
9. ©Copyright 1999, RF Monolithics Inc.
10. Electrostatic Sensitive Device. Observe precautions for handling.





RF Monolithics, Inc.
4347 Sigma Road
Dallas, Texas 75244
USA

Phone: +1(972)233-2903
Fax: +1(972)387-8148
e-mail: info@rfm.com
Home page: www.rfm.com

European Sales Office
44 1963 251383
44 1963 251510

SF1090A-1 350 MHz SAW Filter

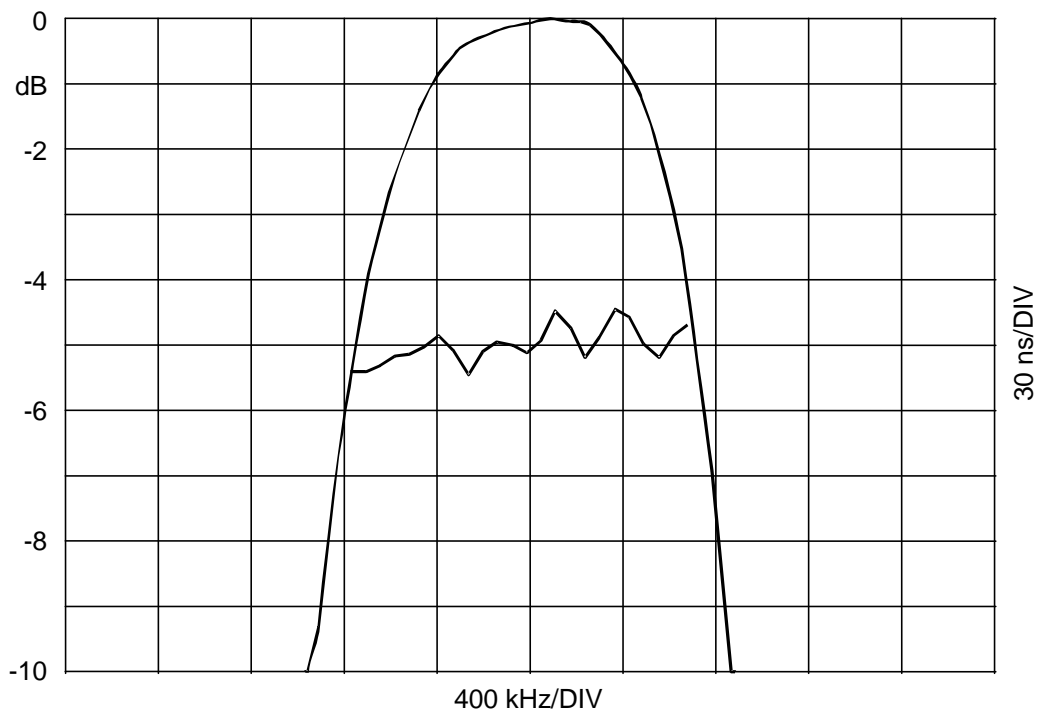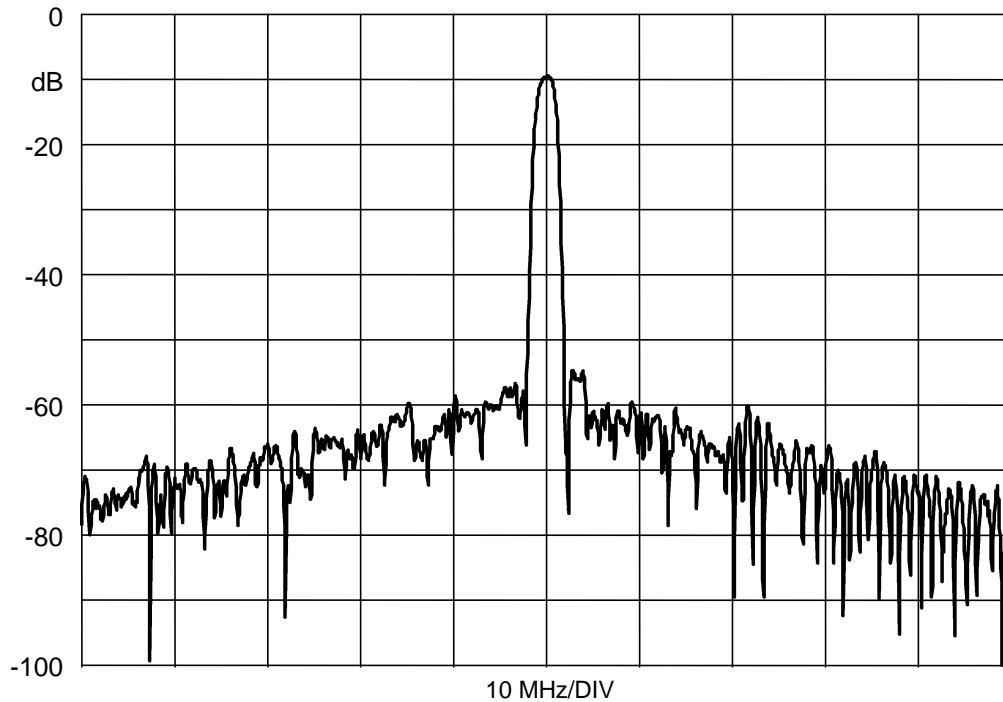


RF Monolithics, Inc.
4347 Sigma Road
Dallas, Texas 75244
USA

Phone: +1(972)233-2903
Fax: +1(972)387-8148
e-mail: info@rfm.com
Home page: www.rfm.com

European Sales Office
44 1963 251383
44 1963 251510

10-Terminal Ceramic Surface-Mount Case 9.1 x 7.1 mm Nominal Footprint

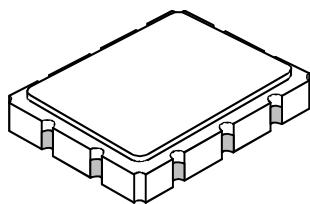

Case Dimensions

Dimension	mm			Inches		
	Min	Nom	Max	Min	Nom	Max
A	8.86	9.09	9.40	0.349	0.358	0.370
B	6.88	7.11	7.40	0.271	0.280	0.291
C		1.91	2.00		0.075	0.079
D		0.99			0.039	
E		0.79			0.031	
H		1.0			0.039	
P		2.54			0.100	

Electrical Connections

Connection		Terminals
Port 1	Input or Return	6
	Return or Input	5
Port 2	Output or Return	1
	Return or Output	10
Ground		All others
Single Ended Operation		Return is ground
Differential Operation		Return is hot

