



| DASH NO. | M CODE | MADE FROM |
|----------|--------|-----------|
|----------|--------|-----------|

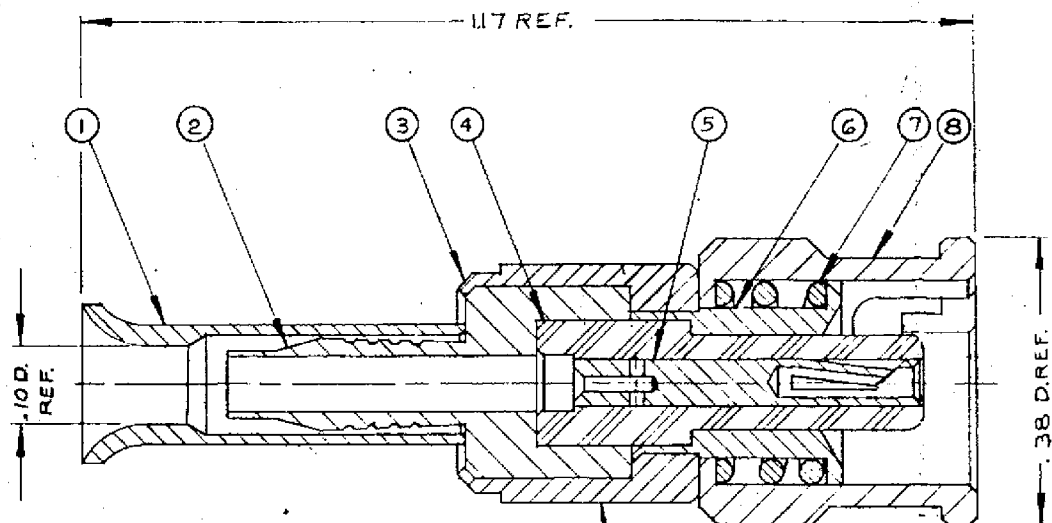

STAMP: KINGS KM-59-41



#### NOTES:

1. FOR USE WITH RAYCHEM 5026A1018 & 5026A1318 CABLE.
2. FOR CABLING INSTRUCTIONS SEE CP-438.
3. FOR CABLE TRIMMING USE KTJ-84 & KTD-216.
4. FOR CRIMPING USE DIE SIZE 22.
5. ITEMS ①, ②, ③ & ⑧ TO HAVE TR-5 FINISH.
6. MARK PACKAGE: KINGS KM-59-41  
XXXX (DATE CODE).

#### UNLESS OTHERWISE SPECIFIED:

1. TOLERANCES: FRACTIONS & 2 PLACE DECIMALS  $\pm .010$   
3 PLACE DECIMALS  $\pm .004$  ANGLES  $\pm 0^{\circ} 30'$
2. REMOVE ALL BURRS, BREAK SHARP EDGES .005 MAX.
3. NO FILLETS PERMITTED.
4. SURFACE ROUGHNESS 63 MICROINCHES RMS MAX.
5. ALL DIMENSIONS PRIOR TO PLATING.

#### REVISIONS

| ISSUE | CHANGES                                |
|-------|----------------------------------------|
| 3     | CN 19206 E<br>GMF 22 AUG 79<br>REDRAWN |
| 4     | CN 29822 C<br>AJ 19 MAY 88             |
| 5     | CN 31044 C<br>M.Z.B. 8 AUG 89          |

KM-59-41

S-D

S-D

SCALE: 6:1

USED ON:

REF:

FINISH

SPEC. KER-10004

MATL

SPEC.

KM  
PLUG

DRAWN GMF DATE 22 AUG 79

APPR. GIND DATE 22 AUG 79

KINGS ELECTRONICS  
40 HARBLEDALE ROAD  
TUCKAHOE, N. Y. 10707

S-D

KM-59-41