



Kxxxzy SIDAC

RoHS

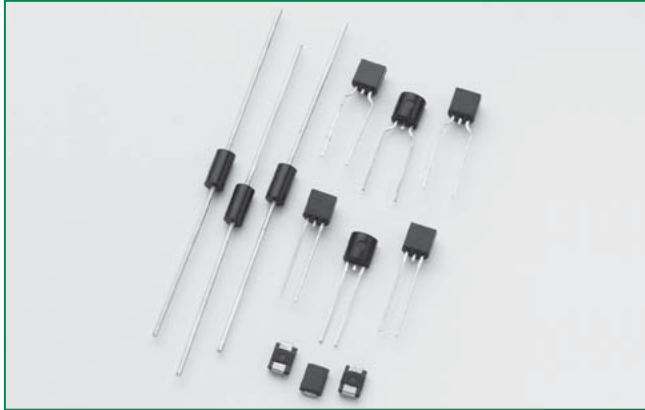

Schematic Symbol



Description

The SIDAC is a silicon bilateral voltage triggered switch. Upon application of a voltage exceeding the SIDAC breakover voltage point, the SIDAC switches on through a negative resistance region to a low on-state voltage. Conduction continues until the current is interrupted or drops below the minimum holding current of the device.

SIDACs feature glass-passivated junctions to ensure a rugged and dependable device capable of withstanding harsh environments.

Features

- AC Circuit Oriented
- RoHS Compliant
- Triggering Voltage of 79V to 330V

Applications

Suitable for high voltage power supplies, natural gas igniters, high-pressure Sodium lamps, and Xenon flash ignition.

Electrical Specifications ($T_J = 25^\circ\text{C}$, unless otherwise specified)

Symbol	Parameters	Test Conditions	Min	Max	Unit
V_{BO}	Breakover/Trigger Voltage	K0900y	79	97	V
		K1050y	95	113	
		K1100y	104	118	
		K1200y	110	125	
		K1300y	120	138	
		K1400y	130	146	
		K1500y	140	170	
		K1800y	165	195	
		K200zy	190	215	
		K220zy	205	230	
		K240zy	220	250	
		K250zy	240	280	
		K300zy	270	330	
V_{DRM}	Repetitive Peak Off-state Voltage	K0900y	70		V
		K1050y	90		
		K1100y	90		
		K1200y	90		
		K1300y	90		
		K1400y	90		
		K1500y	90		
		K1800y	140		
		K200zy	180		
		K220zy	180		
		K240zy	190		
		K250zy	200		
		K300zy	200		

Note: xxx = voltage, z = circuit function, y = package

Kxxxzy Series

Electrical Specifications ($T_J = 25^\circ\text{C}$, unless otherwise specified)

Symbol	Parameters	Test Conditions	Min	Max	Unit
$I_{T(RMS)}$	On-state RMS Current	50/60Hz, $T_J < 125^\circ\text{C}$		1	A
I_{DRM}	Repetitive Peak Off-state Current	$V = V_{DRM}$ 50/60Hz Sine Wave		5	μA
V_{TM}	Peak On-state Voltage	$I_T = 1\text{A}$ Kxxx0y Kxxx2y		1.5 3.0	V
I_H	Dynamic Holding Current	$R_L = 100\Omega$ 50/60Hz Sine Wave		150	mA
R_S	Switching Resistance, $R_S = \frac{(V_{BO} - V_S)}{(I_S - I_{BO})}$	50/60Hz Sine Wave	100		Ω
I_{BO}	Breakover Current	50/60Hz Sine Wave		10	μA
I_{TRM}	Peak Repetitive Pulse Current (refer to figure 4)	$t_p = 10\mu\text{s}$ 60Hz 5Hz		80 160	A
I_{TSM}	Peak Non-repetitive Surge Current (refer to figure 5)	Single Cycle 60Hz 50Hz		20 16.7	A
di/dt	Critical Rate of Rise of On-state Current			150	A/ μs
dv/dt	Critical Rate of Rise of Off-state Voltage		1500		V/ μs
T_S	Storage Temperature Range		-40	150	$^\circ\text{C}$
T_J	Junction Temperature Range		-40	125	$^\circ\text{C}$
$R_{\theta JL}$	Thermal Resistance, Junction to Lead	DO-15 DO-214 (1)		18 30	$^\circ\text{C/W}$
$R_{\theta JC}$	Thermal Resistance, Junction to Case	TO-92		35	$^\circ\text{C/W}$
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient	DO-15 TO-92		75 95	$^\circ\text{C/W}$

Notes: xxx = voltage, z = circuit function, y = package

 (1) Mounted on 1 cm² copper foil surface; two-ounce copper foil

Figure 1: V-I Characteristics

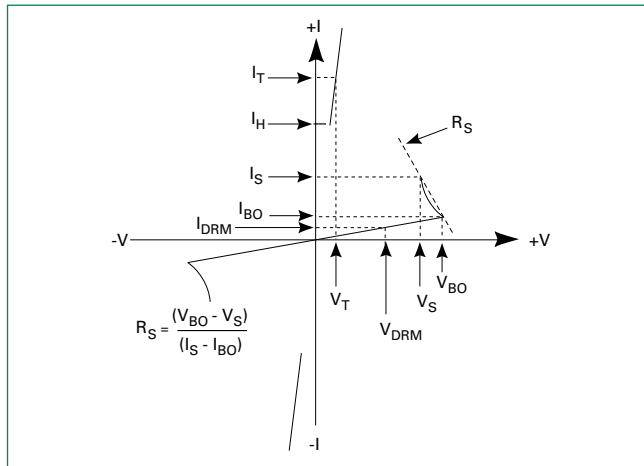


Figure 2: On-state Current vs. On-state Voltage (Typical)

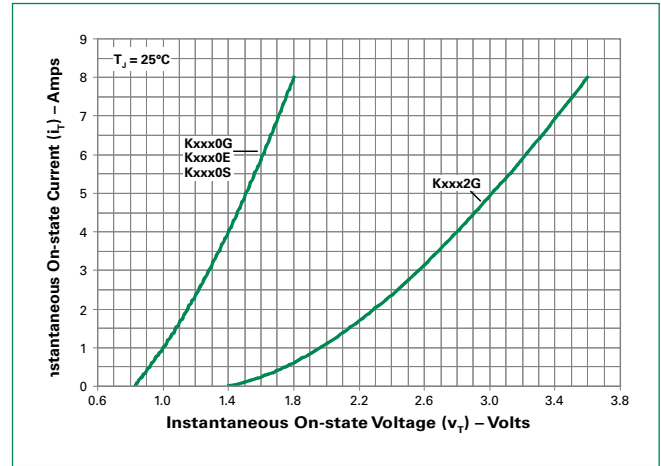


Figure 3: Power Dissipation vs. On-state Current (Typical)

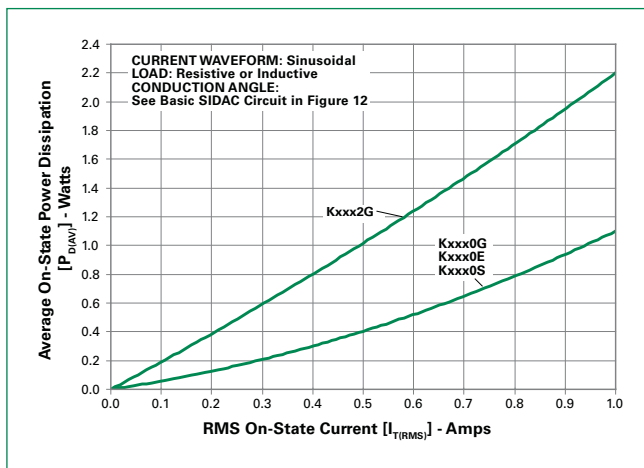


Figure 4: Repetitive Peak On-state Current (I_{TRM}) vs. Pulse Width at Various Frequencies

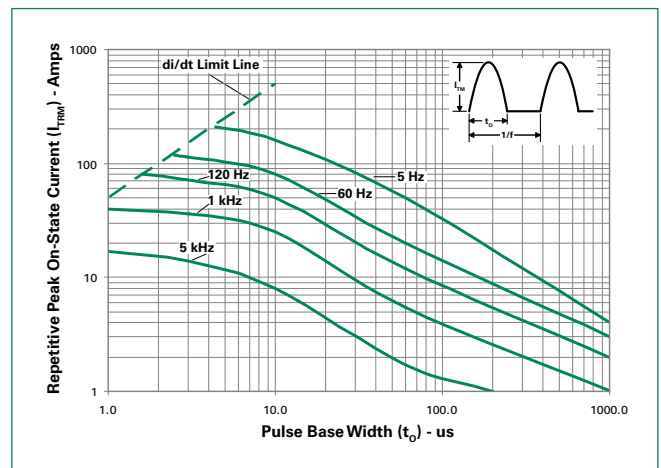


Figure 5: Peak Non-repetitive Surge Current (I_{TSM}) vs. Number of Cycles

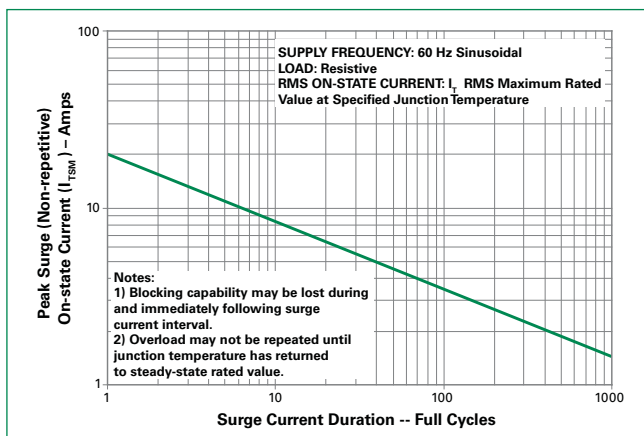


Figure 6: Normalized V_{BO} Change vs. Junction Temperature

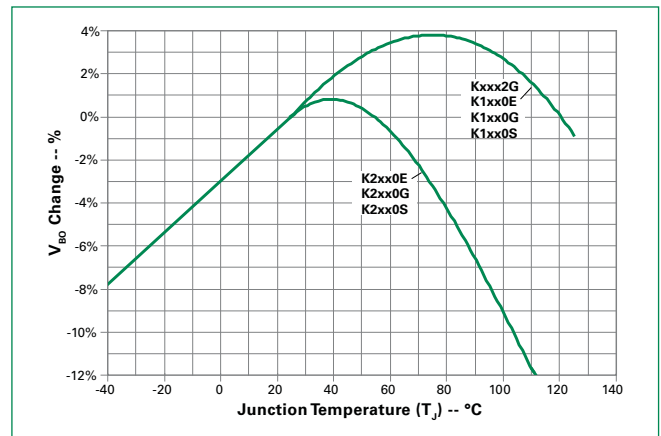


Figure 7: Normalized DC Holding Current vs. Junction Temperature

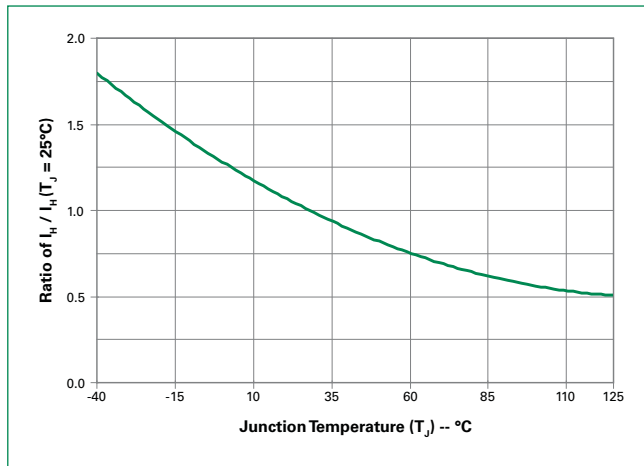


Figure 8: Maximum Allowable Case Temperature vs. RMS On-State Current

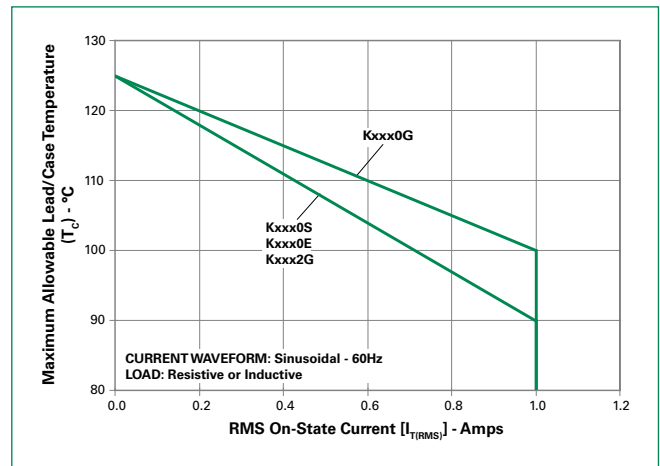


Figure 9: Maximum Allowable Ambient Temperature vs. RMS On-State Current

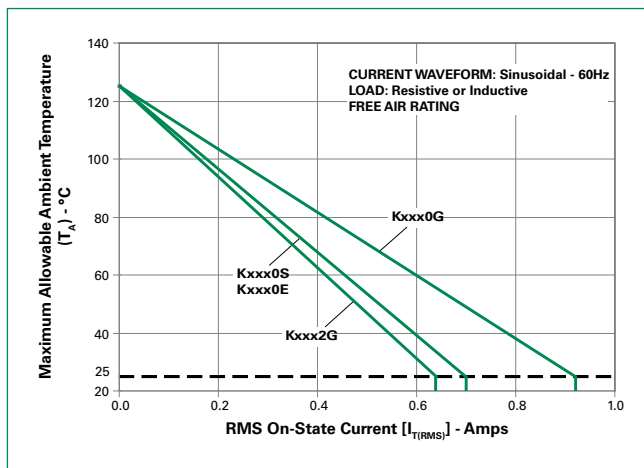


Figure 10: Normalized Repetitive Peak Breakover Current (I_{BO}) vs. Junction Temperature

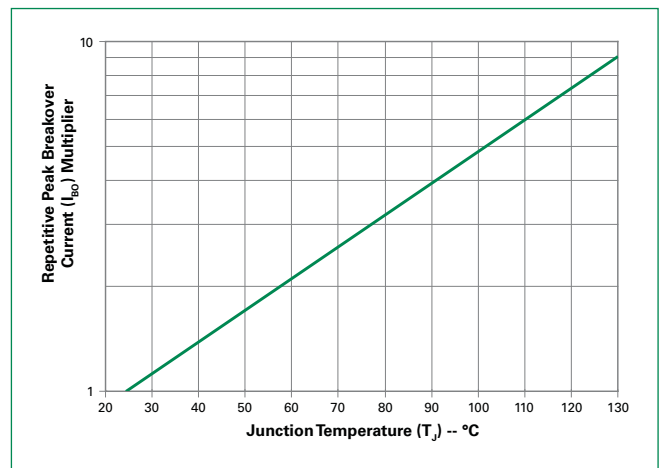


Figure 11: Dynamic Holding Current Test Circuit for SIDACs

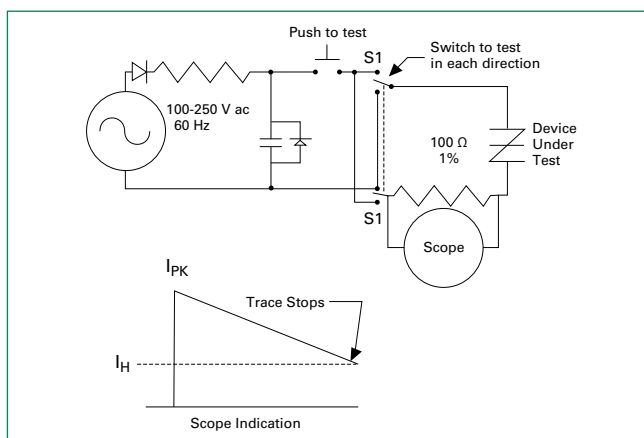


Figure 12: Basic SIDAC Circuit

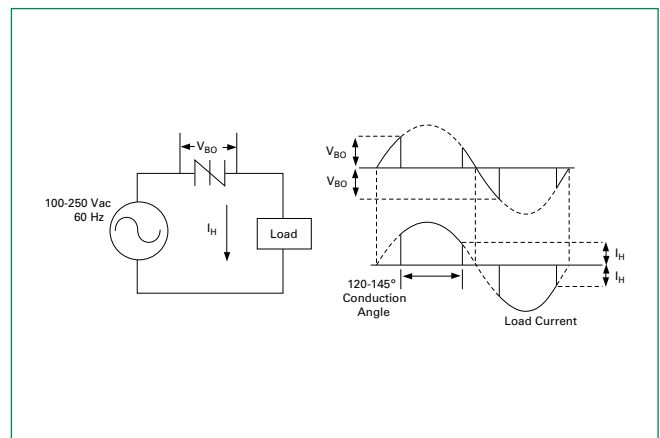


Figure 13: Relaxation Oscillator Using a SIDAC

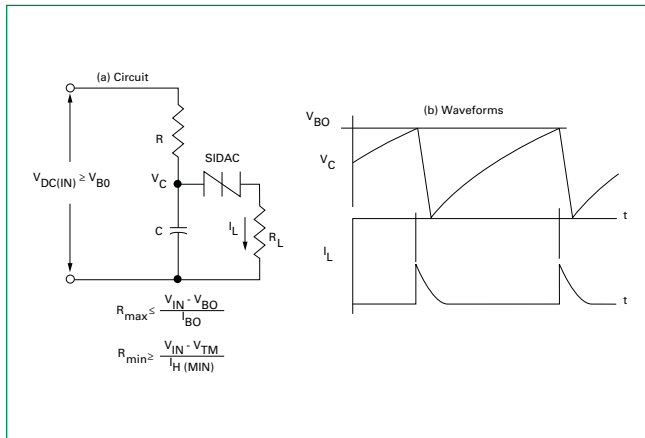


Figure 14: Low-voltage Input Circuit for Gas Ignition

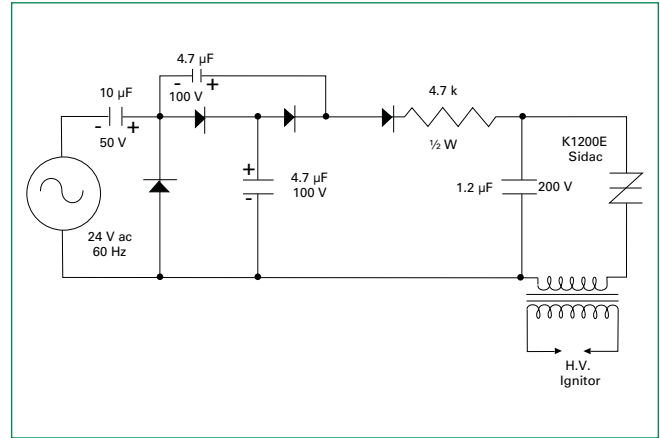


Figure 15: Comparison of SIDAC versus SCR for Gas Ignitor Circuit

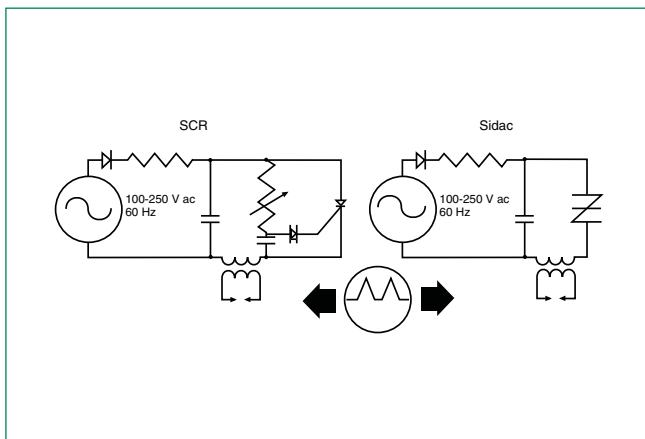


Figure 16: Xenon Lamp Flashing Circuit



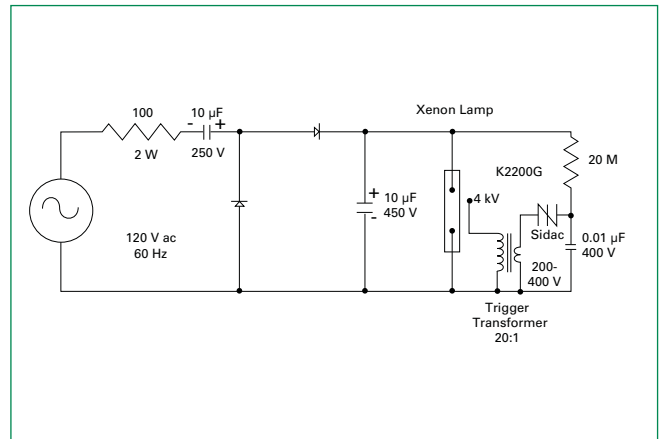


Figure 17: Typical High-pressure Sodium Lamp Firing Circuit

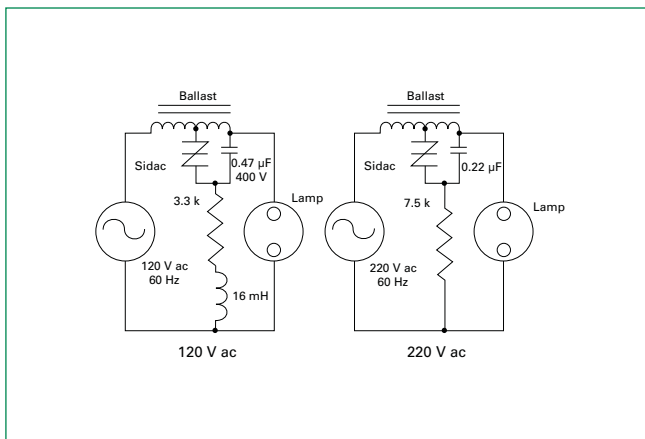

Soldering Parameters

Reflow Condition		Pb – Free assembly
Pre Heat	- Temperature Min ($T_{s(min)}$)	150°C
	- Temperature Max ($T_{s(max)}$)	200°C
	- Time (min to max) (t_s)	60 – 180 secs
Average ramp up rate (Liquidus Temp (T_L) to peak		5°C/second max
$T_{s(max)}$ to T_L - Ramp-up Rate		5°C/second max
Reflow	- Temperature (T_L) (Liquidus)	217°C
	- Temperature (t_L)	60 – 150 seconds
Peak Temperature (T_p)		260 ^{+0/-5} °C
Time within 5°C of actual peak Temperature (t_p)		20 – 40 seconds
Ramp-down Rate		5°C/second max
Time 25°C to peak Temperature (T_p)		8 minutes Max.
Do not exceed		280°C

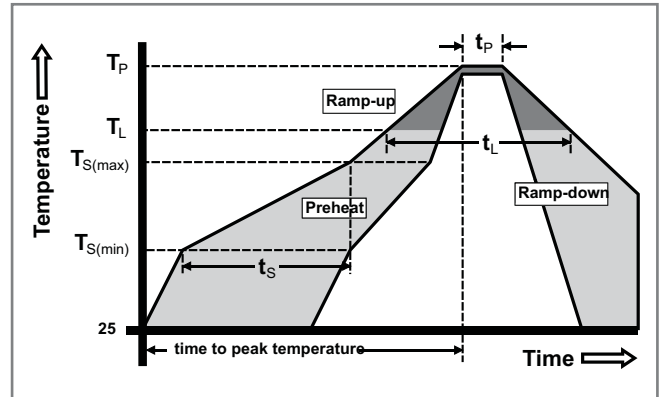

Physical Specifications

Terminal Finish	100% Matte Tin Plated / Pb-free Solder Dipped
Body Material	UL recognized epoxy meeting flammability classification 94V-0
Lead Material	Copper Alloy


Design Considerations

Careful selection of the correct device for the application's operating parameters and environment will go a long way toward extending the operating life of the Thyristor. Overheating and surge currents are the main killers of SIDACs. Correct mounting, soldering, and forming of the leads also help protect against component damage.

Reliability/Environmental Tests


Test	Specifications and Conditions
High Temperature Voltage Blocking	MIL-STD-750: Method 1040, Condition A Rated V_{DRM} (VAC-peak), 125°C, 1008 hours
Temperature Cycling	MIL-STD-750: Method 1051 -40°C to 150°C, 15-minute dwell, 100 cycles
Biased Temperature & Humidity	EIA/JEDEC: JESD22-A101 80% min V_{BO} (V_{DC}), 85°C, 85% RH, 1008 hours
High Temp Storage	MIL-STD-750: Method 1031 150°C, 1008 hours
Low-Temp Storage	-40°C, 1008 hours
Thermal Shock	MIL-STD-750: Method 1056 0°C to 100°C, 5-minute dwell, 10-second transfer, 10 cycles
Autoclave (Pressure Cooker Test)	EIA/JEDEC: JESD22-A102 121°C, 100% RH, 2atm, 168 hours
Resistance to Solder Heat	MIL-STD-750: Method 2031 260°C, 10 seconds
Solderability	ANSI/J-STD-002: Category 3
Lead Bend	MIL-STD-750: Method 2036, Condition E

Dimensions — DO-214

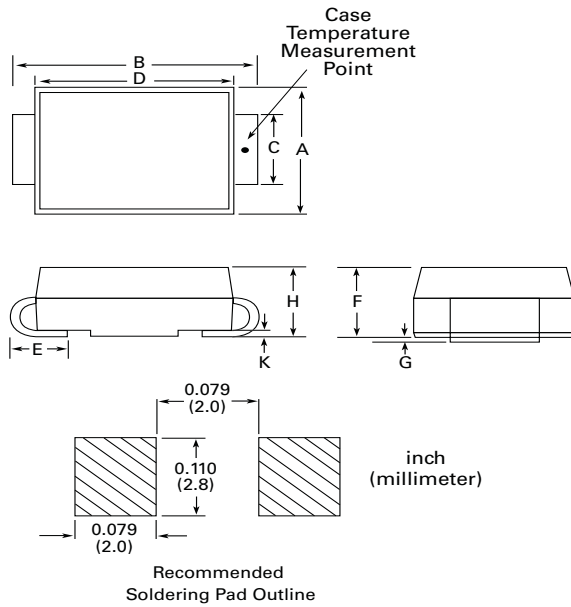


Dimension	Inches		Millimeters	
	Max	Max	Min	Max
A	0.130	0.156	3.30	3.95
B	0.201	0.220	5.10	5.60
C	0.077	0.087	1.95	2.20
D	0.159	0.181	4.05	4.60
E	0.030	0.063	0.75	1.60
F	0.075	0.096	1.90	2.45
G	0.002	0.008	0.05	0.20
H	0.077	0.104	1.95	2.65
K	0.006	0.016	0.15	0.41

Dimensions — DO-15

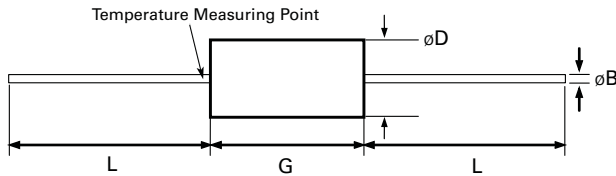

Dimension	Inches		Millimeters	
	Max	Max	Min	Max
øB	0.028	0.034	0.711	0.864
øD	0.120	0.140	3.048	3.556
G	0.235	0.270	5.969	6.858
L	1.000		25.400	

Dimensions — TO-92 with Type 70 Lead Form

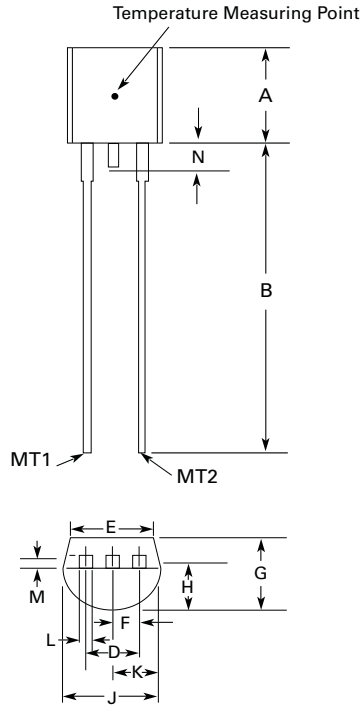

Dimension	Inches		Millimeters	
	Max	Max	Min	Max
A	0.176	0.196	4.47	4.98
B	0.500		12.70	
D	0.095	0.105	2.41	2.67
E	0.150		3.81	
F	0.046	0.054	1.16	1.37
G	0.135	0.145	3.43	3.68
H	0.088	0.096	2.23	2.44
J	0.176	0.186	4.47	4.73
K	0.088	0.096	2.23	2.44
L	0.013	0.019	0.33	0.48
M	0.013	0.017	0.33	0.43
N		0.060		1.52

Notes:

1. Type 70 lead form as shown is standard for the E package.
2. All leads are insulated from case. Case is electrically nonconductive (rated at 16000V ac rms for one minute from leads to case over the operating temperature range.)
3. Mold flash shall not exceed 0.13 mm per side.

Product Selector

Part Number	Switching Voltage Range		Blocking Voltage	Packages		
	V _{BO} Minimum	V _{BO} Maximum	V _{DRM}	DO-15	DO-214	TO-92
K0900y	79V	97V	70V	K0900G	K0900S	K0900E70
K1050y	95V	113V	90V	K1050G	K1050S	K1050E70
K1100y	104V	118V	90V	K1100G	K1100S	K1100E70
K1200y	110V	125V	90V	K1200G	K1200S	K1200E70
K1300y	120V	138V	90V	K1300G	K1300S	K1300E70
K1400y	130V	146V	90V	K1400G	K1400S	K1400E70
K1500y	140V	170V	90V	K1500G	K1500S	K1500E70
K1800y	165V	195V	140V		K1800S	
K2000y	190V	215V	180V	K2000G	K2000S	K2000E70
K2002y	190V	215V	180V	K2002G		
K2200y	205V	230V	180V	K2200G	K2200S	K2200E70
K2202y	205V	230V	180V	K2202G		
K2400y	220V	250V	190V	K2400G	K2400S	K2400E70
K2402y	220V	250V	190V	K2402G		
K2500y	240V	280V	200V	K2500G	K2500S	K2500E70
K2502y	240V	280V	200V	K2502G		
K3002y	270V	330V	200V	K3002G		


Note: y = package

Packing Options


Part Number	Marking	Weight	Packaging Mode	Base Quantity
Kxxx0G	Kxxx0G	0.38g	Bulk	1000
Kxxx0GRP	Kxxx0G	0.38g	Reel Pack	5000
Kxxx2G	Kxxx2G	0.38g	Bulk	1000
Kxxx2GRP	Kxxx2G	0.38g	Reel Pack	5000
Kxxx0SRP	KxxS	0.1g	Reel Pack	2500
Kxxx0E70	Kxxx0E	0.17g	Bulk	2000
Kxxx0E70AP	Kxxx0E	0.17g	Ammo Pack	2000
Kxxx0E70RP2	Kxxx0E	0.17g	Reel Pack	2000
Kxxx0E70RP3	Kxxx0E	0.17g	Reel Pack	2000

Note: xxx or xx = voltage


DO-214 Embossed Carrier Reel Pack (RP) Specifications

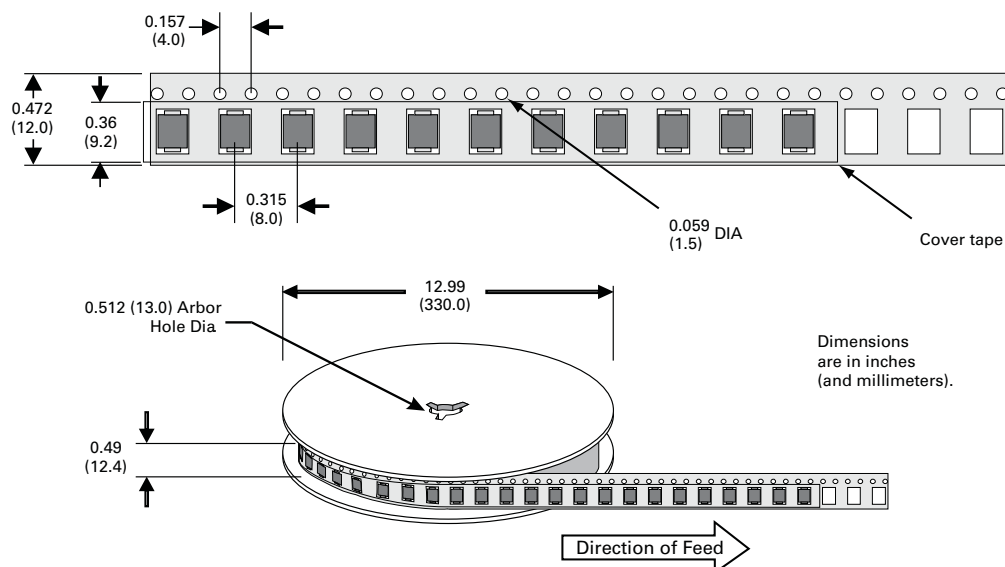

DO-15 Reel Pack (RP) Specifications

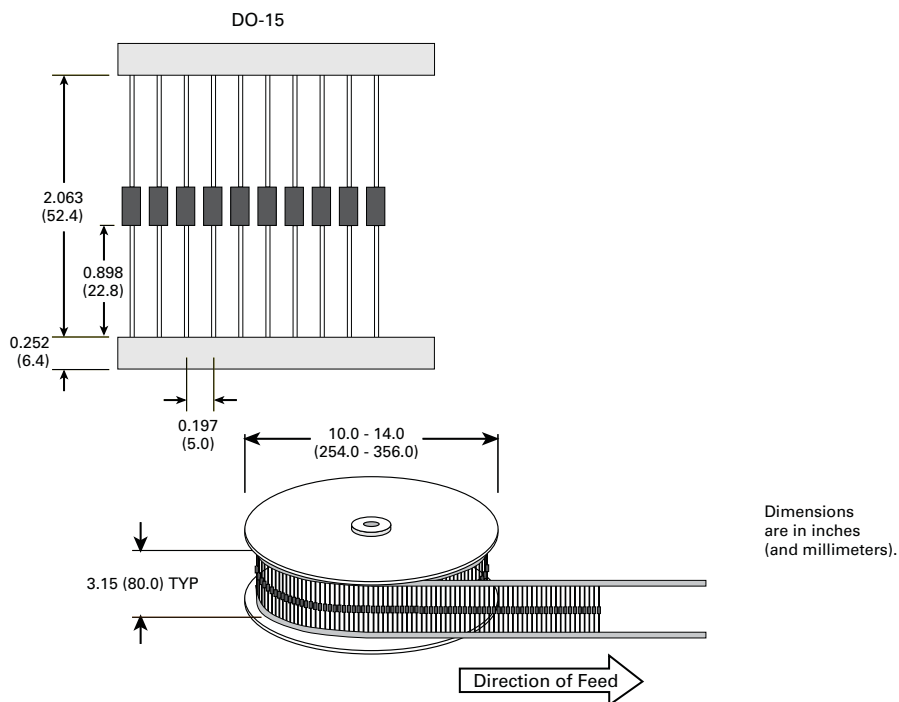

DO-15 Ammo Pack (AP) Specifications

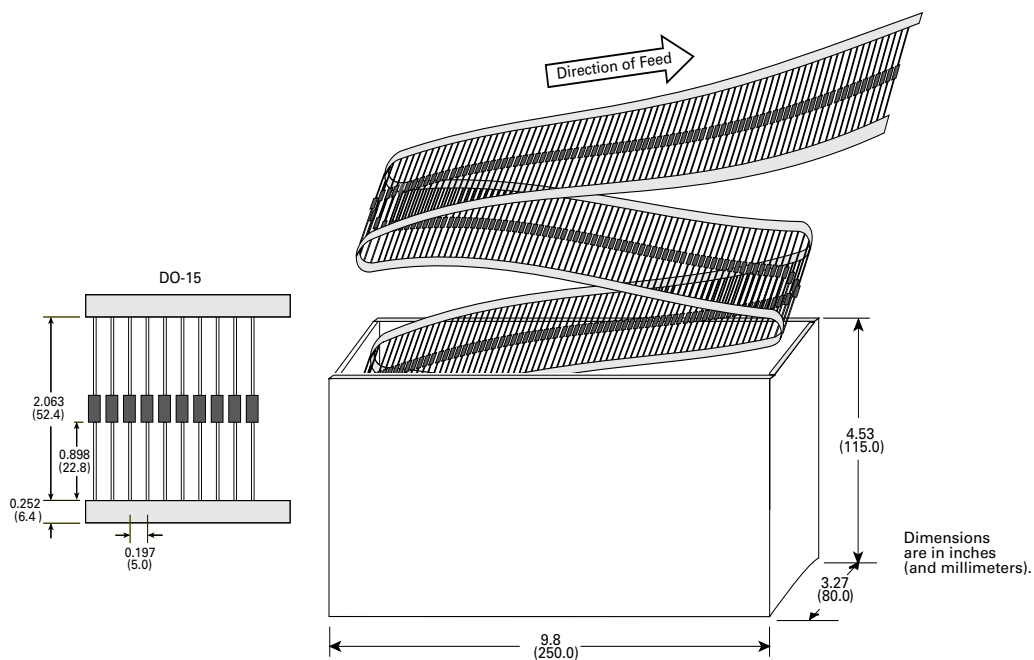

Technical drawing of a 16-pin D-subminiature connector. The drawing includes a top view and a side view.

Top View Dimensions:

- Overall width: 1.3 (33.0)
- Pin pitch: 0.1 (2.54)
- Pin diameter: 0.02 (0.5)
- Pin spacing from edge: 0.236 (6.0)
- Pin spacing from center: 0.354 (9.0)
- Pin diameter: 0.157 (4.0)
- Pin spacing from edge: 0.708 (18.0)
- Pin spacing from center: 0.5 (12.7)
- Pin spacing from edge: 0.91 (23.2)

Side View Dimensions:

- Overall height: 1.97 (50.0)
- Pin height: 14.17 (360.0)

Notes:

- Dimensions are in inches (and millimeters).
- Flat Up
- Direction of Feed

Technical drawing of a circular die casting mold assembly, showing dimensions in inches and millimeters.

Top View Dimensions:

- Overall Width: 14.17 (360.0)
- Cavity Diameter: 0.157 (4.0)
- Distance from Center to First Cavity: 0.50 (12.7)
- Distance between Cavities: 0.25 (6.35)
- Distance from Last Cavity to Edge: 0.20 (5.08)
- Distance from Edge to First Cavity: 0.50 (12.7)
- Distance from Edge to Second Cavity: 0.236 (6.0)
- Distance from Second Cavity to Third Cavity: 0.02 (0.5)
- Distance from Third Cavity to Fourth Cavity: 0.02 (0.5)
- Distance from Fourth Cavity to Fifth Cavity: 0.02 (0.5)
- Distance from Fifth Cavity to Sixth Cavity: 0.02 (0.5)
- Distance from Sixth Cavity to Seventh Cavity: 0.02 (0.5)
- Distance from Seventh Cavity to Eighth Cavity: 0.02 (0.5)
- Distance from Eighth Cavity to Edge: 0.02 (0.5)
- Distance from Edge to Ninth Cavity: 0.02 (0.5)
- Distance from Ninth Cavity to Tenth Cavity: 0.02 (0.5)
- Distance from Tenth Cavity to Edge: 0.02 (0.5)
- Distance from Edge to Eleventh Cavity: 0.02 (0.5)
- Distance from Eleventh Cavity to Twelfth Cavity: 0.02 (0.5)
- Distance from Twelfth Cavity to Edge: 0.02 (0.5)
- Distance from Edge to Thirteenth Cavity: 0.02 (0.5)
- Distance from Thirteenth Cavity to Fourteenth Cavity: 0.02 (0.5)
- Distance from Fourteenth Cavity to Edge: 0.02 (0.5)
- Distance from Edge to Fifteenth Cavity: 0.02 (0.5)
- Distance from Fifteenth Cavity to Sixteenth Cavity: 0.02 (0.5)
- Distance from Sixteenth Cavity to Edge: 0.02 (0.5)
- Distance from Edge to Seventeenth Cavity: 0.02 (0.5)
- Distance from Seventeenth Cavity to Eighteenth Cavity: 0.02 (0.5)
- Distance from Eighteenth Cavity to Edge: 0.02 (0.5)
- Distance from Edge to Nineteenth Cavity: 0.02 (0.5)
- Distance from Nineteenth Cavity to Twentieth Cavity: 0.02 (0.5)
- Distance from Twentieth Cavity to Edge: 0.02 (0.5)
- Distance from Edge to Twenty-first Cavity: 0.02 (0.5)
- Distance from Twenty-first Cavity to Twenty-second Cavity: 0.02 (0.5)
- Distance from Twenty-second Cavity to Edge: 0.02 (0.5)
- Distance from Edge to Twenty-third Cavity: 0.02 (0.5)
- Distance from Twenty-third Cavity to Twenty-fourth Cavity: 0.02 (0.5)
- Distance from Twenty-fourth Cavity to Edge: 0.02 (0.5)
- Distance from Edge to Twenty-fifth Cavity: 0.02 (0.5)
- Distance from Twenty-fifth Cavity to Twenty-sixth Cavity: 0.02 (0.5)
- Distance from Twenty-sixth Cavity to Edge: 0.02 (0.5)
- Distance from Edge to Twenty-seventh Cavity: 0.02 (0.5)
- Distance from Twenty-seventh Cavity to Twenty-eighth Cavity: 0.02 (0.5)
- Distance from Twenty-eighth Cavity to Edge: 0.02 (0.5)
- Distance from Edge to Twenty-ninth Cavity: 0.02 (0.5)
- Distance from Twenty-ninth Cavity to Thirtieth Cavity: 0.02 (0.5)
- Distance from Thirtieth Cavity to Edge: 0.02 (0.5)
- Distance from Edge to Thirty-first Cavity: 0.02 (0.5)
- Distance from Thirty-first Cavity to Thirty-second Cavity: 0.02 (0.5)
- Distance from Thirty-second Cavity to Edge: 0.02 (0.5)
- Distance from Edge to Thirty-third Cavity: 0.02 (0.5)
- Distance from Thirty-third Cavity to Thirty-fourth Cavity: 0.02 (0.5)
- Distance from Thirty-fourth Cavity to Edge: 0.02 (0.5)
- Distance from Edge to Thirty-fifth Cavity: 0.02 (0.5)
- Distance from Thirty-fifth Cavity to Thirty-sixth Cavity: 0.02 (0.5)
- Distance from Thirty-sixth Cavity to Edge: 0.02 (0.5)
- Distance from Edge to Thirty-seventh Cavity: 0.02 (0.5)
- Distance from Thirty-seventh Cavity to Thirty-eighth Cavity: 0.02 (0.5)
- Distance from Thirty-eighth Cavity to Edge: 0.02 (0.5)
- Distance from Edge to Thirty-ninth Cavity: 0.02 (0.5)
- Distance from Thirty-ninth Cavity to Forty Cavity: 0.02 (0.5)
- Distance from Forty Cavity to Edge: 0.02 (0.5)
- Distance from Edge to Forty-first Cavity: 0.02 (0.5)
- Distance from Forty-first Cavity to Forty-second Cavity: 0.02 (0.5)
- Distance from Forty-second Cavity to Edge: 0.02 (0.5)
- Distance from Edge to Forty-third Cavity: 0.02 (0.5)
- Distance from Forty-third Cavity to Forty-fourth Cavity: 0.02 (0.5)
- Distance from Forty-fourth Cavity to Edge: 0.02 (0.5)
- Distance from Edge to Forty-fifth Cavity: 0.02 (0.5)
- Distance from Forty-fifth Cavity to Forty-sixth Cavity: 0.02 (0.5)
- Distance from Forty-sixth Cavity to Edge: 0.02 (0.5)
- Distance from Edge to Forty-seventh Cavity: 0.02 (0.5)
- Distance from Forty-seventh Cavity to Forty-eighth Cavity: 0.02 (0.5)
- Distance from Forty-eighth Cavity to Edge: 0.02 (0.5)
- Distance from Edge to Forty-ninth Cavity: 0.02 (0.5)
- Distance from Forty-ninth Cavity to Fiftieth Cavity: 0.02 (0.5)
- Distance from Fiftieth Cavity to Edge: 0.02 (0.5)
- Distance from Edge to Fifty-first Cavity: 0.02 (0.5)
- Distance from Fifty-first Cavity to Fifty-second Cavity: 0.02 (0.5)
- Distance from Fifty-second Cavity to Edge: 0.02 (0.5)
- Distance from Edge to Fifty-third Cavity: 0.02 (0.5)
- Distance from Fifty-third Cavity to Fifty-fourth Cavity: 0.02 (0.5)
- Distance from Fifty-fourth Cavity to Edge: 0.02 (0.5)
- Distance from Edge to Fifty-fifth Cavity: 0.02 (0.5)
- Distance from Fifty-fifth Cavity to Fifty-sixth Cavity: 0.02 (0.5)
- Distance from Fifty-sixth Cavity to Edge: 0.02 (0.5)
- Distance from Edge to Fifty-seventh Cavity: 0.02 (0.5)
- Distance from Fifty-seventh Cavity to Fifty-eighth Cavity: 0.02 (0.5)
- Distance from Fifty-eighth Cavity to Edge: 0.02 (0.5)
- Distance from Edge to Fifty-ninth Cavity: 0.02 (0.5)
- Distance from Fifty-ninth Cavity to Sixtieth Cavity: 0.02 (0.5)
- Distance from Sixtieth Cavity to Edge: 0.02 (0.5)
- Distance from Edge to Sixty-first Cavity: 0.02 (0.5)
- Distance from Sixty-first Cavity to Sixty-second Cavity: 0.02 (0.5)
- Distance from Sixty-second Cavity to Edge: 0.02 (0.5)
- Distance from Edge to Sixty-third Cavity: 0.02 (0.5)
- Distance from Sixty-third Cavity to Sixty-fourth Cavity: 0.02 (0.5)
- Distance from Sixty-fourth Cavity to Edge: 0.02 (0.5)
- Distance from Edge to Sixty-fifth Cavity: 0.02 (0.5)
- Distance from Sixty-fifth Cavity to Sixty-sixth Cavity: 0.02 (0.5)
- Distance from Sixty-sixth Cavity to Edge: 0.02 (0.5)
- Distance from Edge to Sixty-seventh Cavity: 0.02 (0.5)
- Distance from Sixty-seventh Cavity to Sixty-eighth Cavity: 0.02 (0.5)
- Distance from Sixty-eighth Cavity to Edge: 0.02 (0.5)
- Distance from Edge to Sixty-ninth Cavity: 0.02 (0.5)
- Distance from Sixty-ninth Cavity to Seventieth Cavity: 0.02 (0.5)
- Distance from Seventieth Cavity to Edge: 0.02 (0.5)
- Distance from Edge to Seventy-first Cavity: 0.02 (0.5)
- Distance from Seventy-first Cavity to Seventy-second Cavity: 0.02 (0.5)
- Distance from Seventy-second Cavity to Edge: 0.02 (0.5)
- Distance from Edge to Seventy-third Cavity: 0.02 (0.5)
- Distance from Seventy-third Cavity to Seventy-fourth Cavity: 0.02 (0.5)
- Distance from Seventy-fourth Cavity to Edge: 0.02 (0.5)
- Distance from Edge to Seventy-fifth Cavity: 0.02 (0.5)
- Distance from Seventy-fifth Cavity to Seventy-sixth Cavity: 0.02 (0.5)
- Distance from Seventy-sixth Cavity to Edge: 0.02 (0.5)
- Distance from Edge to Seventy-seventh Cavity: 0.02 (0.5)
- Distance from Seventy-seventh Cavity to Seventy-eighth Cavity: 0.02 (0.5)
- Distance from Seventy-eighth Cavity to Edge: 0.02 (0.5)
- Distance from Edge to Seventy-ninth Cavity: 0.02 (0.5)
- Distance from Seventy-ninth Cavity to Eightieth Cavity: 0.02 (0.5)
- Distance from Eightieth Cavity to Edge: 0.02 (0.5)
- Distance from Edge to Eighty-first Cavity: 0.02 (0.5)
- Distance from Eighty-first Cavity to Eighty-second Cavity: 0.02 (0.5)
- Distance from Eighty-second Cavity to Edge: 0.02 (0.5)
- Distance from Edge to Eighty-third Cavity: 0.02 (0.5)
- Distance from Eighty-third Cavity to Eighty-fourth Cavity: 0.02 (0.5)
- Distance from Eighty-fourth Cavity to Edge: 0.02 (0.5)
- Distance from Edge to Eighty-fifth Cavity: 0.02 (0.5)
- Distance from Eighty-fifth Cavity to Eighty-sixth Cavity: 0.02 (0.5)
- Distance from Eighty-sixth Cavity to Edge: 0.02 (0.5)
- Distance from Edge to Eighty-seventh Cavity: 0.02 (0.5)
- Distance from Eighty-seventh Cavity to Eighty-eighth Cavity: 0.02 (0.5)
- Distance from Eighty-eighth Cavity to Edge: 0.02 (0.5)
- Distance from Edge to Eighty-ninth Cavity: 0.02 (0.5)
- Distance from Eighty-ninth Cavity to Ninetieth Cavity: 0.02 (0.5)
- Distance from Ninetieth Cavity to Edge: 0.02 (0.5)
- Distance from Edge to Ninety-first Cavity: 0.02 (0.5)
- Distance from Ninety-first Cavity to Ninety-second Cavity: 0.02 (0.5)
- Distance from Ninety-second Cavity to Edge: 0.02 (0.5)
- Distance from Edge to Ninety-third Cavity: 0.02 (0.5)
- Distance from Ninety-third Cavity to Ninety-fourth Cavity: 0.02 (0.5)
- Distance from Ninety-fourth Cavity to Edge: 0.02 (0.5)
- Distance from Edge to Ninety-fifth Cavity: 0.02 (0.5)
- Distance from Ninety-fifth Cavity to Ninety-sixth Cavity: 0.02 (0.5)
- Distance from Ninety-sixth Cavity to Edge: 0.02 (0.5)
- Distance from Edge to Ninety-seventh Cavity: 0.02 (0.5)
- Distance from Ninety-seventh Cavity to Ninety-eighth Cavity: 0.02 (0.5)
- Distance from Ninety-eighth Cavity to Edge: 0.02 (0.5)
- Distance from Edge to Ninety-ninth Cavity: 0.02 (0.5)
- Distance from Ninety-ninth Cavity to One Hundred Cavity: 0.02 (0.5)
- Distance from One Hundred Cavity to Edge: 0.02 (0

[illegible]

The diagram illustrates the structure of a 5-digit alphanumeric code, where each digit represents a specific attribute. The digits are labeled as follows:

- K**: Device Type
- 240**: Voltage Rating
- 0**: Circuit Function
- E**: Package Type
- 70**: Lead Form Dimensions
- RP2**: Packaging Options

Below each label, a list of possible values for that digit is provided:

- DEVICE TYPE**: K: Sidac
- VOLTAGE RATING**:
 - 090: 79 – 97V
 - 105: 95 – 113V
 - 110: 104 – 118V
 - 120: 110 – 125V
 - 130: 120 – 138V
 - 140: 130 – 146V
 - 150: 140 – 170V
 - 180: 165 – 195V
 - 200: 190 – 215V
 - 220: 205 – 230V
 - 240: 220 – 250V
 - 250: 240 – 280V
 - 300: 270 – 330V
- CIRCUIT FUNCTION**: 0: Standard
- PACKAGE TYPE**:
 - G: DO-15
 - S: DO-214
 - E: TO-92
- LEAD FORM DIMENSIONS**: xx: Lead Form Option
- PACKAGING OPTIONS**:
 - [blank]: Bulk
 - AP: Ammo(TO-92)
 - RP: Reel(non TO-92)
 - RP2: Reel(TO-92)
 - RP3: Reel(TO-92)

TO-92

K2400E

YMLXX

DO-214AA

K24S

YMXXX

DO-15

K2400G

YMXXX

Date Code Marking
 Y: Year Code
 M: Month Code
 L: Location Code
 XX: Lot Serial Code