



DRIVER STAGE AMPLIFIER APPLICATIONS.
VOLTAGE AMPLIFIER APPLICATIONS.

MAXIMUM RATINGS (Ta=25℃)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	V_{CBO}	80	V
Collector-Emitter Voltage	V_{CEO}	80	V
Emitter-Base Voltage	V_{EBO}	6	V
Collector Current	I_C	500	mA
Emitter Current	I_E	-500	mA
Collector Power Dissipation	P_C	350	mW
Junction Temperature	T_j	150	℃
Storage Temperature	T_{stg}	-55~150	℃

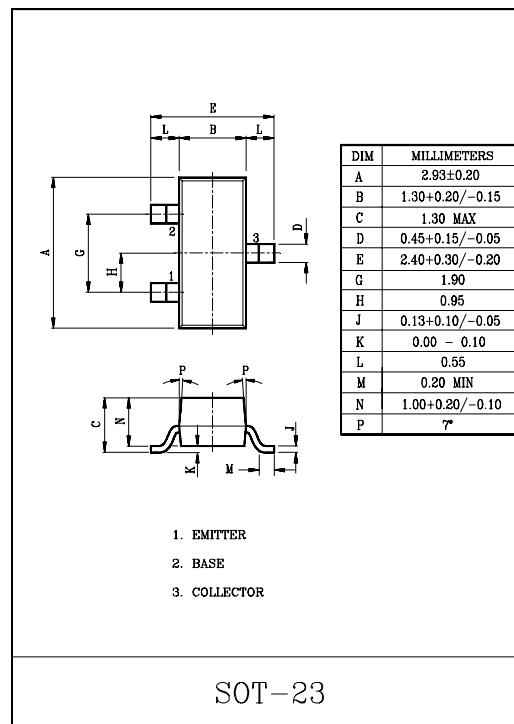

Marking

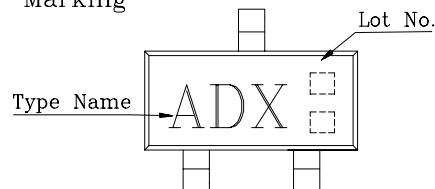

ELECTRICAL CHARACTERISTICS (Ta=25℃)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current	I_{CBO}	$V_{CB}=80V$	-	-	100	nA
Emitter Cut-off Current	I_{CEO}	$V_{CE}=60V$	-	-	100	nA
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C=1mA$	80	-	-	V
DC Current Gain	$h_{FE}(1)$	$V_{CE}=1V, I_C=10mA$	100	-	-	
	$h_{FE}(2)$	$V_{CE}=1V, I_C=100mA$	100	-	-	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=100mA, I_B=10mA$	-	-	0.25	V
Base-Emitter Voltage	V_{BE}	$V_{CE}=1V, I_C=100mA$	-	-	1.2	V
Transition Frequency	f_T	$V_{CE}=2V, I_C=10mA$	100	-	-	MHz