

## MOS FET Relays

**G3VM-41LR5**

**World's Smallest SSOP Package MOS FET Relay with Low Output Capacitance and ON Resistance ( $C \times R = 10\text{pF} \cdot \Omega$ ) in a 40-V Load Voltage Model**

- ON resistance of  $1 \Omega$  (typical) suppresses output signal attenuation.

**Note:** Information correct as of October, 2002, according to data obtained by OMRON.



**NEW**  Approval pending

**Note:** The actual product is marked differently from the image shown here.

### ■ Application Examples

- Semiconductor inspection tools
- Measurement devices
- Broadband systems
- Data loggers



### ■ List of Models

Contact form	Terminals	Load voltage (peak value)	Model	Number per tape
SPST-NO	Surface-mounting terminals	40 VAC	G3VM-41LR5	---
			G3VM-41LR5(TR)	1,500

### ■ Dimensions

**Note:** All units are in millimeters unless otherwise indicated.

**G3VM-41LR5**




**Note:** The actual product is marked differently from the image shown here.

**Note:** A tolerance of  $\pm 0.1$  mm applies to all dimensions unless otherwise specified.

Weight: 0.03 g


### ■ Terminal Arrangement/Internal Connections (Top View)

**G3VM-41LR5**



### ■ Actual Mounting Pad Dimensions (Recommended Value, Top View)

**G3VM-41LR5**



## Absolute Maximum Ratings (Ta = 25°C)


Item		Symbol	Rating	Unit	Measurement Conditions
Input	LED forward current	I <sub>F</sub>	50	mA	
	Repetitive peak LED forward current	I <sub>FP</sub>	1	A	100 μs pulses, 100 pps
	LED forward current reduction rate	Δ I <sub>F</sub> /°C	-0.5	mA/°C	T <sub>a</sub> ≥ 25°C
	LED reverse voltage	V <sub>R</sub>	5	V	
	Connection temperature	T <sub>j</sub>	125	°C	
Output	Output dielectric strength	V <sub>OFF</sub>	40	V	
	Continuous load current	I <sub>O</sub>	300	mA	
	ON current reduction rate	Δ I <sub>ON</sub> /°C	-3.0	mA/°C	T <sub>a</sub> ≥ 25°C
	Connection temperature	T <sub>j</sub>	125	°C	
Dielectric strength between input and output (See note 1.)		V <sub>I-O</sub>	1,500	V <sub>rms</sub>	AC for 1 min
Operating temperature		T <sub>a</sub>	-20 to +85	°C	With no icing or condensation
Storage temperature		T <sub>stg</sub>	-40 to +125	°C	With no icing or condensation
Soldering temperature (10 s)		---	260	°C	10 s

**Note:** 1. The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.

## Electrical Characteristics (Ta = 25°C)

Item	Symbol	Minimum	Typical	Maximum	Unit	Measurement conditions
Input	LED forward voltage	$V_F$	1.0	1.15	1.3	V
	Reverse current	$I_R$	---	---	10	μA
	Capacity between terminals	$C_T$	---	15	---	pF
	Trigger LED forward current	$I_{FT}$	---	---	4	mA
Output	Maximum resistance with output ON	$R_{ON}$	---	1.0	1.5	Ω
	Current leakage when the relay is open	$I_{LEAK}$	---	---	1.0	nA
	Capacity between terminals	$C_{OFF}$	---	10	14	pF
Capacity between I/O terminals		$C_{I-O}$	---	0.8	---	pF
Insulation resistance		$R_{I-O}$	1,000	---	---	MΩ
Turn-ON time		$t_{ON}$	---	---	0.5	ms
Turn-OFF time		$t_{OFF}$	---	---	0.5	ms

**Note:** 2. Turn-ON and Turn-OFF Times



## Recommended Operating Conditions


Use the G3VM under the following conditions so that the Relay will operate properly.

Item	Symbol	Minimum	Typical	Maximum	Unit
Output dielectric strength	$V_{DD}$	---	---	32	V
Operating LED forward current	$I_F$	10	---	30	mA
Continuous load current	$I_O$	---	---	300	mA
Operating temperature	$T_a$	25	---	60	°C

## Engineering Data

### Load Current vs. Ambient Temperature

G3VM-41LR5

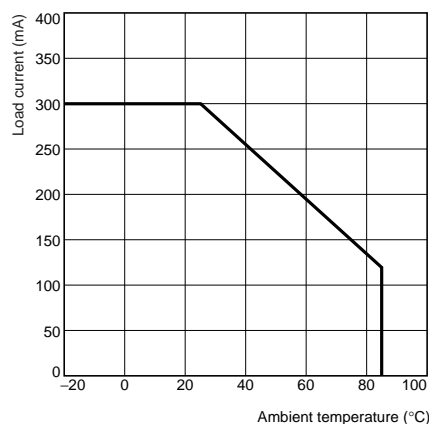

## Safety Precautions

Refer to page 6 for precautions common to all G3VM models.