


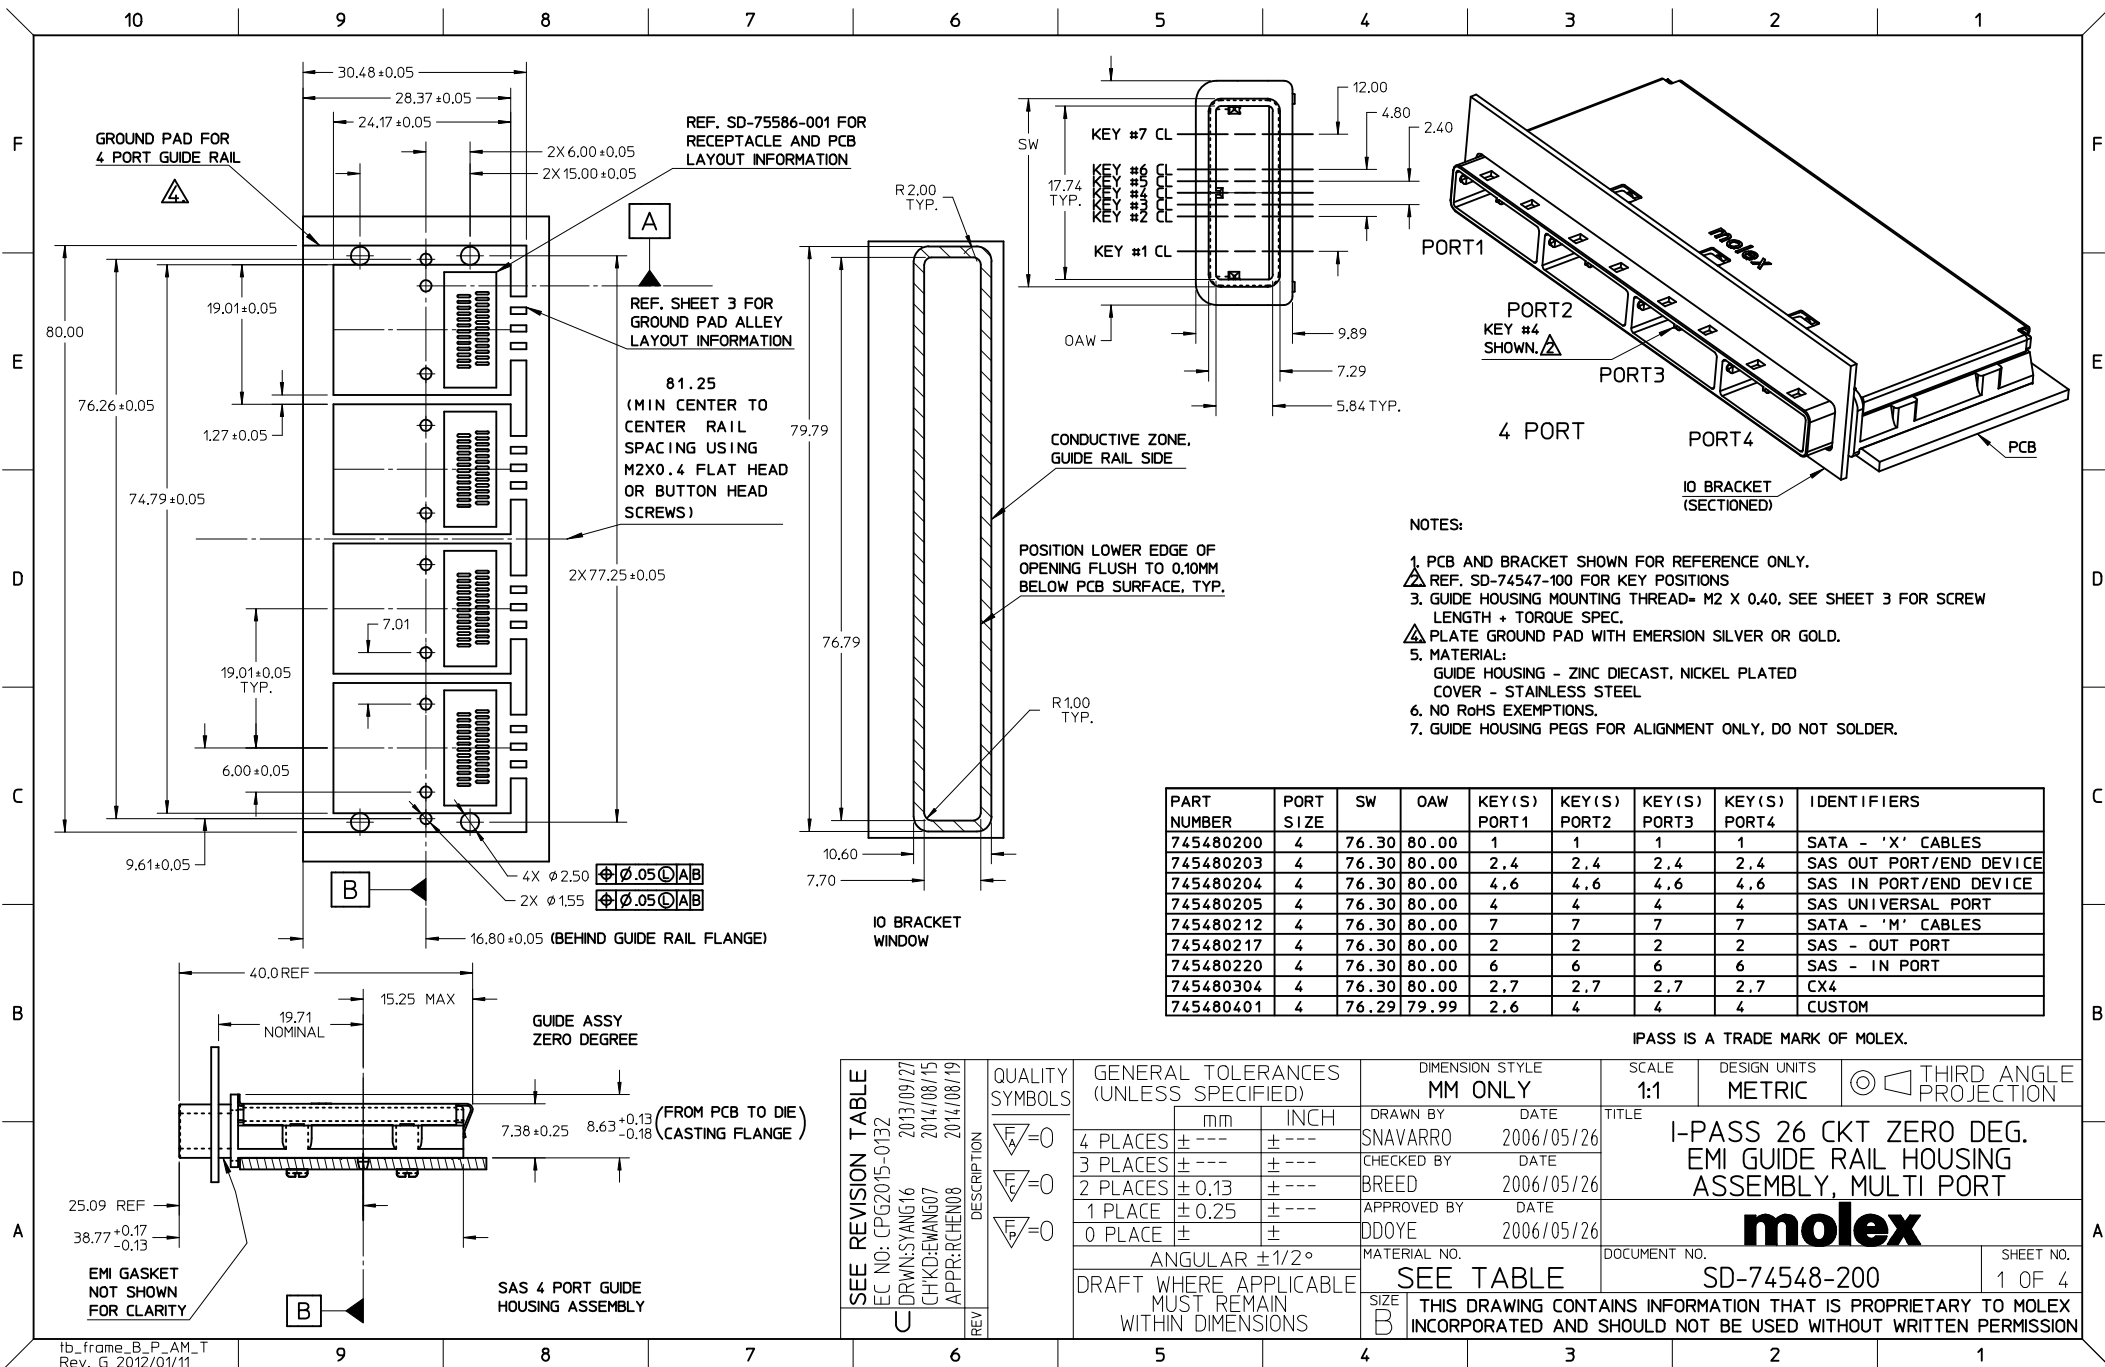


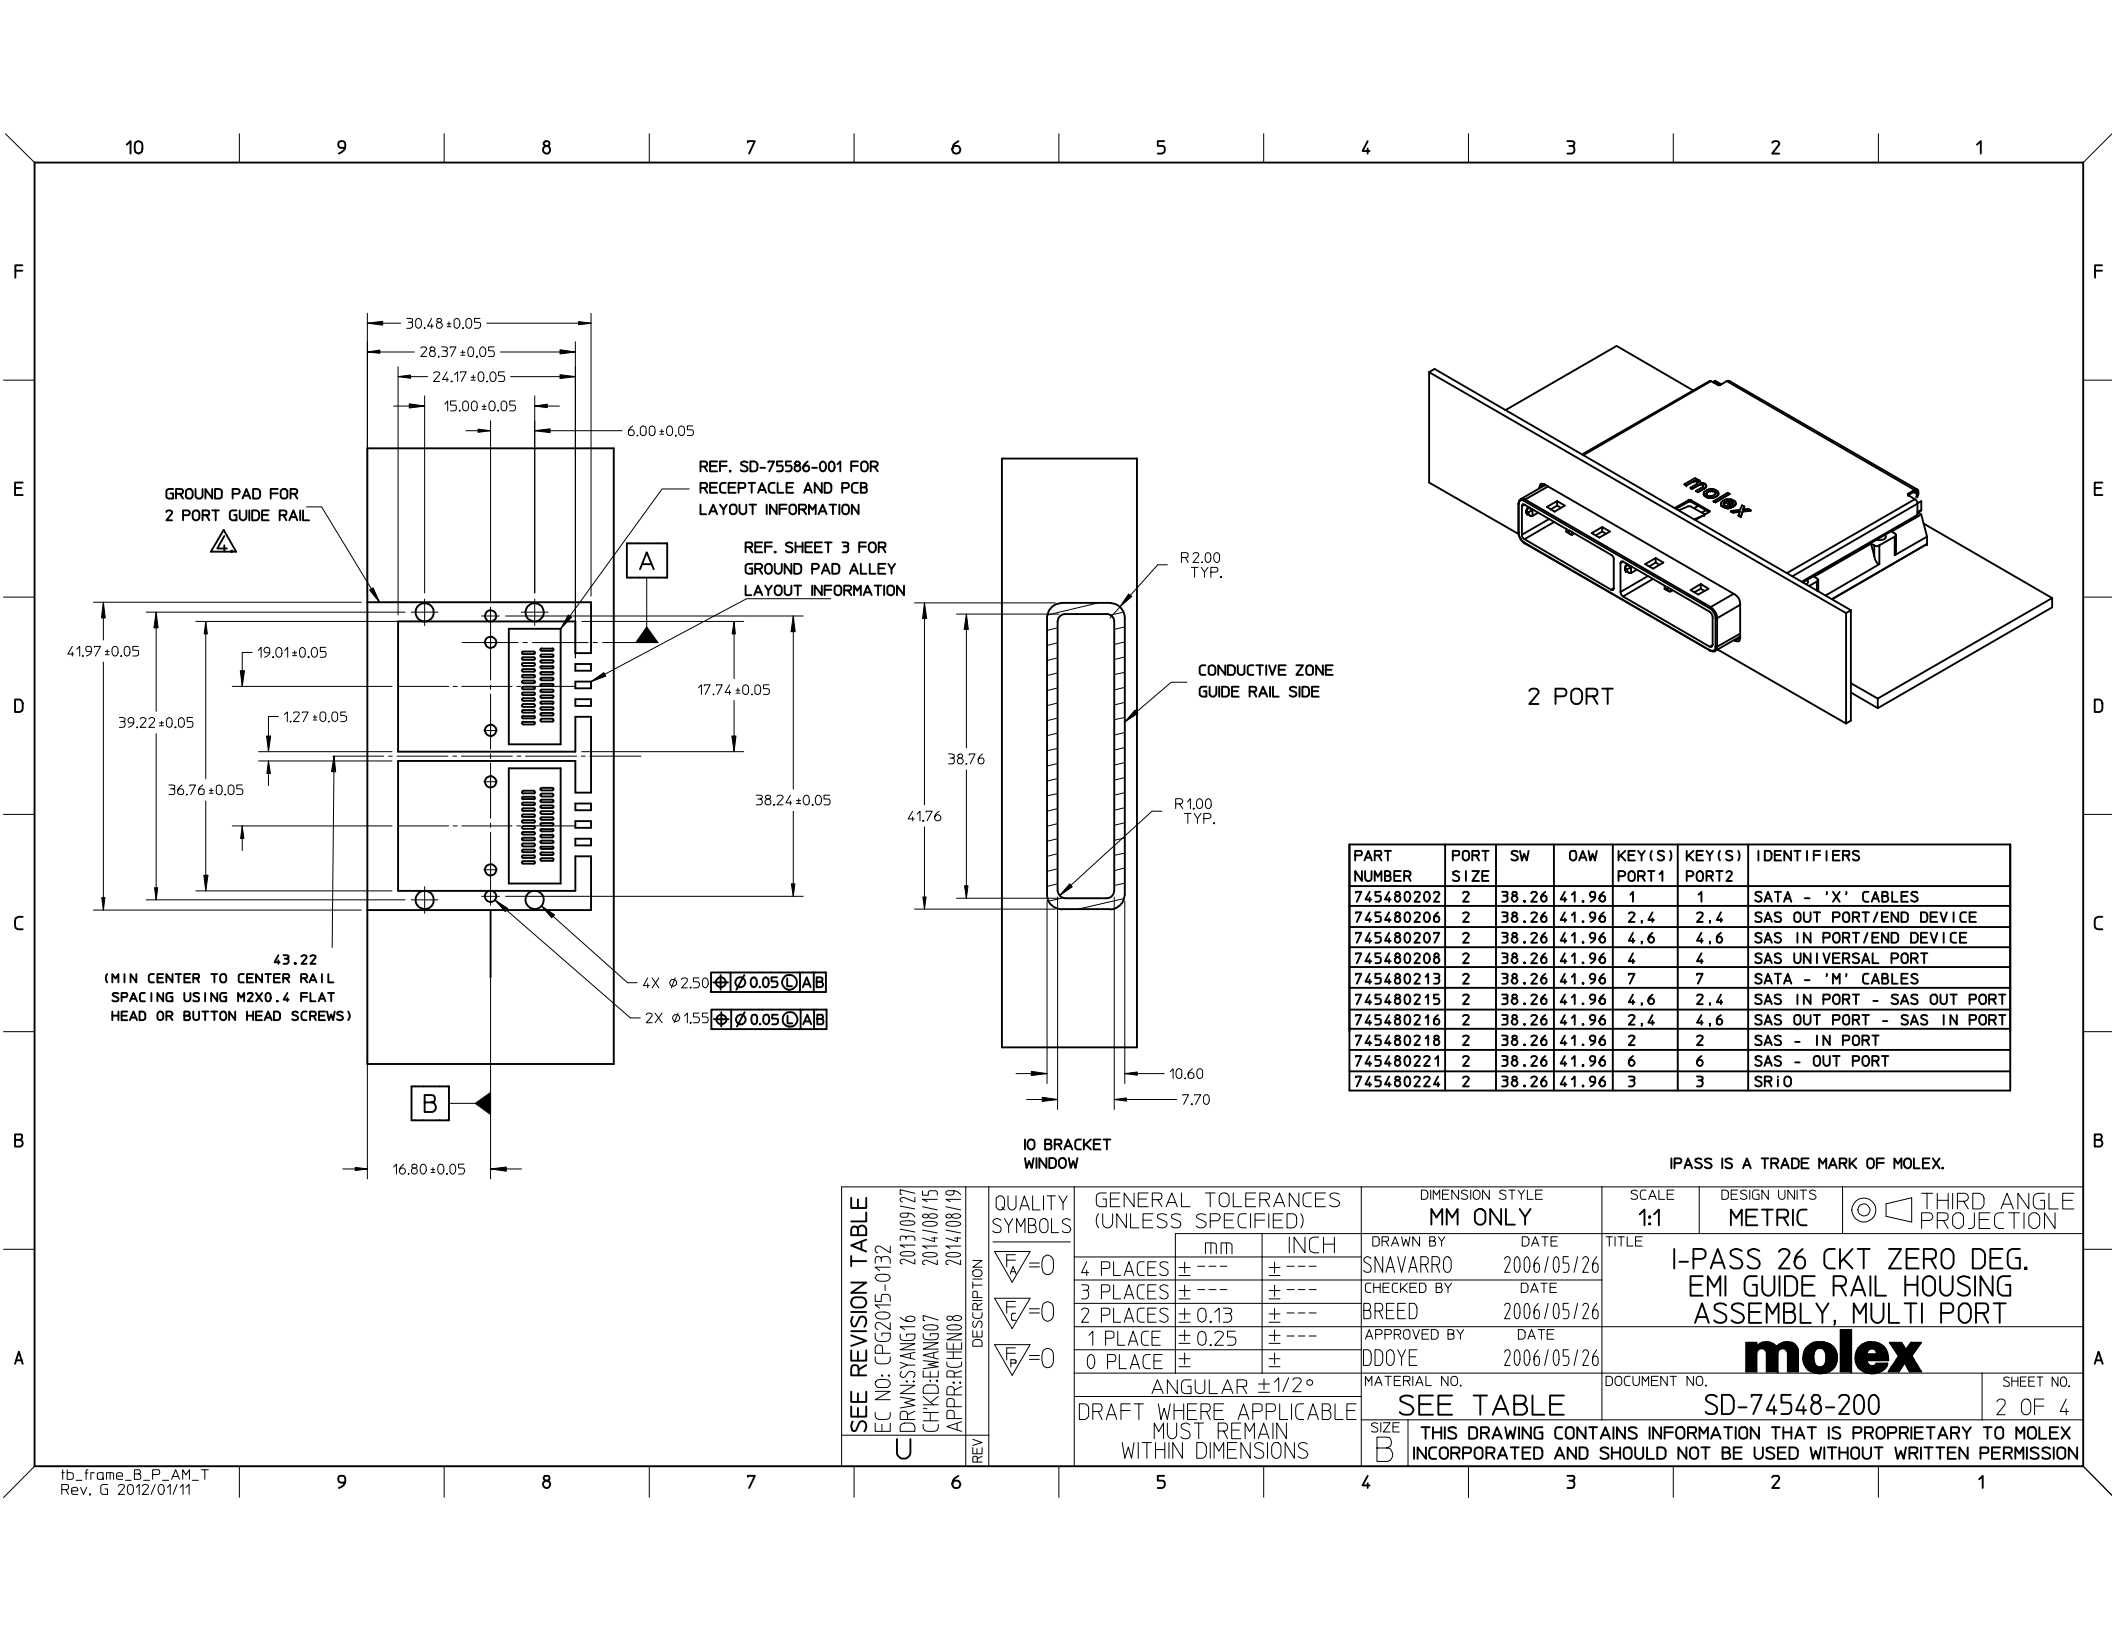

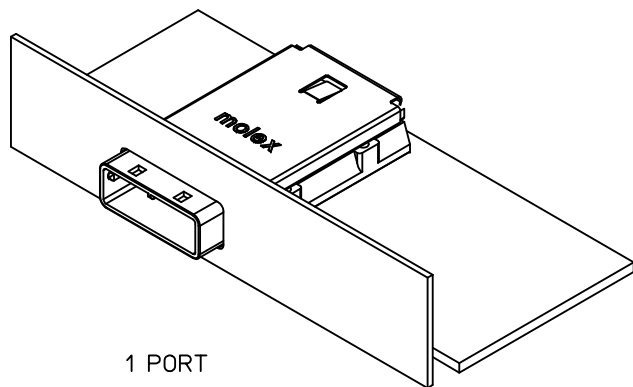

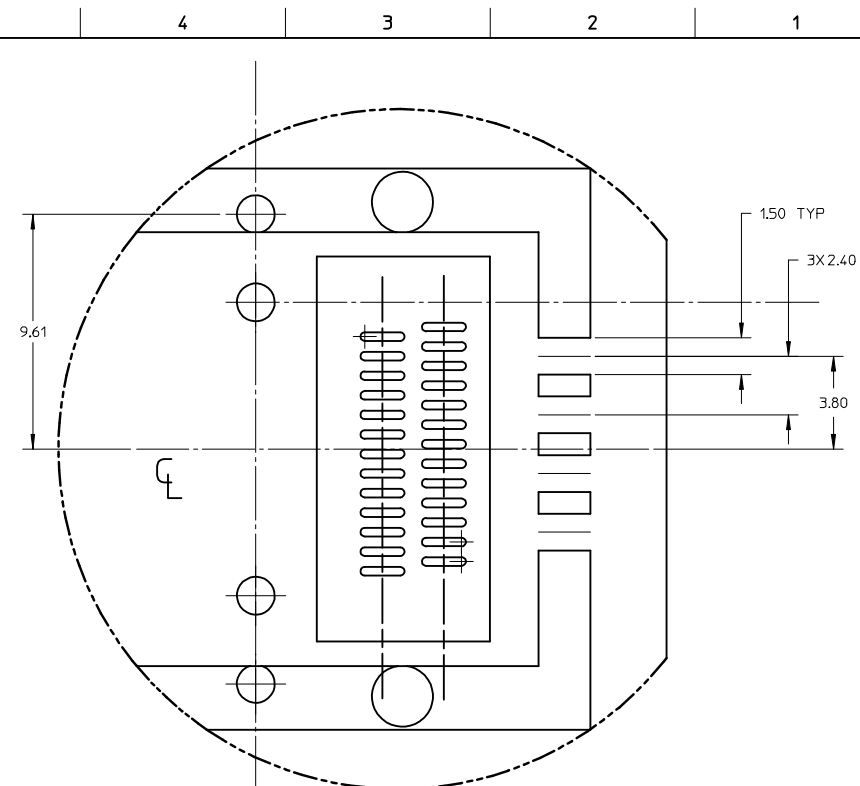

DETAIL 1
Scale 5:1

PART NUMBER	PORT SIZE	SW	OAW	KEY(S)	IDENTIFIERS
745480201	1	19.24	22.95	1	SATA - 'X' CABLES
745480209	1	19.24	22.95	2,4	SAS OUT PORT/END DEVICE
745480210	1	19.24	22.95	4,6	SAS IN PORT/END DEVICE
745480211	1	19.24	22.95	4	SAS UNIVERSAL PORT
745480214	1	19.24	22.95	7	SATA - 'M' CABLES
745480219	1	19.24	22.95	2	SAS OUT PORT
745480222	1	19.24	22.95	6	SAS IN PORT
745480225	1	19.24	22.95	3	SRIO
745480229	1	19.24	22.95	2,7	CX4

PCB THICKNESS	SCREW LENGTH	TORQUE (IN LBS)
1.6 (.063")	5MM	2.3
2.38 (.093")	6MM	2.3
3.2 (.125")	6MM	2.3
X	+4MM MAX	2.3

SEE REVISION TABLE EC NO: CPG2015-0132 DRAWN:SYANG16 CHK'D:EWANG07 APP'R:RCHEN08	2013/09/27 2014/08/15 2014/08/19	DESCRIPTION REV	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 1:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
			▽=0 ▽=0 ▽=0		mm	INCH	DRAWN BY SNAVARRO	DATE 2006/05/26	TITLE I-PASS 26 CKT ZERO DEG. EMI GUIDE RAIL HOUSING ASSEMBLY, MULTI PORT		
				4 PLACES	± ---	± ---	CHECKED BY BREED	DATE 2006/05/26			
				3 PLACES	± ---	± ---	APPROVED BY DDOYE	DATE 2006/05/26	molex		
				2 PLACES	± 0.13	± ---	MATERIAL NO. SEE TABLE	DOCUMENT NO. SD-74548-200		SHEET NO. 3 OF 4	
				1 PLACE	± 0.25	± ---	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				
				0 PLACE	±	±					
ANGULAR ±1/2°											
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS											

